

OUTDOOR LIGHTING


 **PROline**
professional lighting
PRODAJA IN ZASTOPSTVO
JAKA&I d.o.o.



 **Zambelis**
LIGHTS

Connect to our B2B platform through our website and access everything you need, anytime - 24/7

-  B2B Online Order/Open Orders
-  Product Availability & Arrival Dates
-  Extensive Range of Products
-  HD Photos
-  Product Data Sheets
-  Installation Manuals
-  Flexibility & Customized Products
-  Manufacturing Products
-  Photometric Files
-  CE Certificates
-  COC Certificates
-  3D Models / 3D Viewer on Website

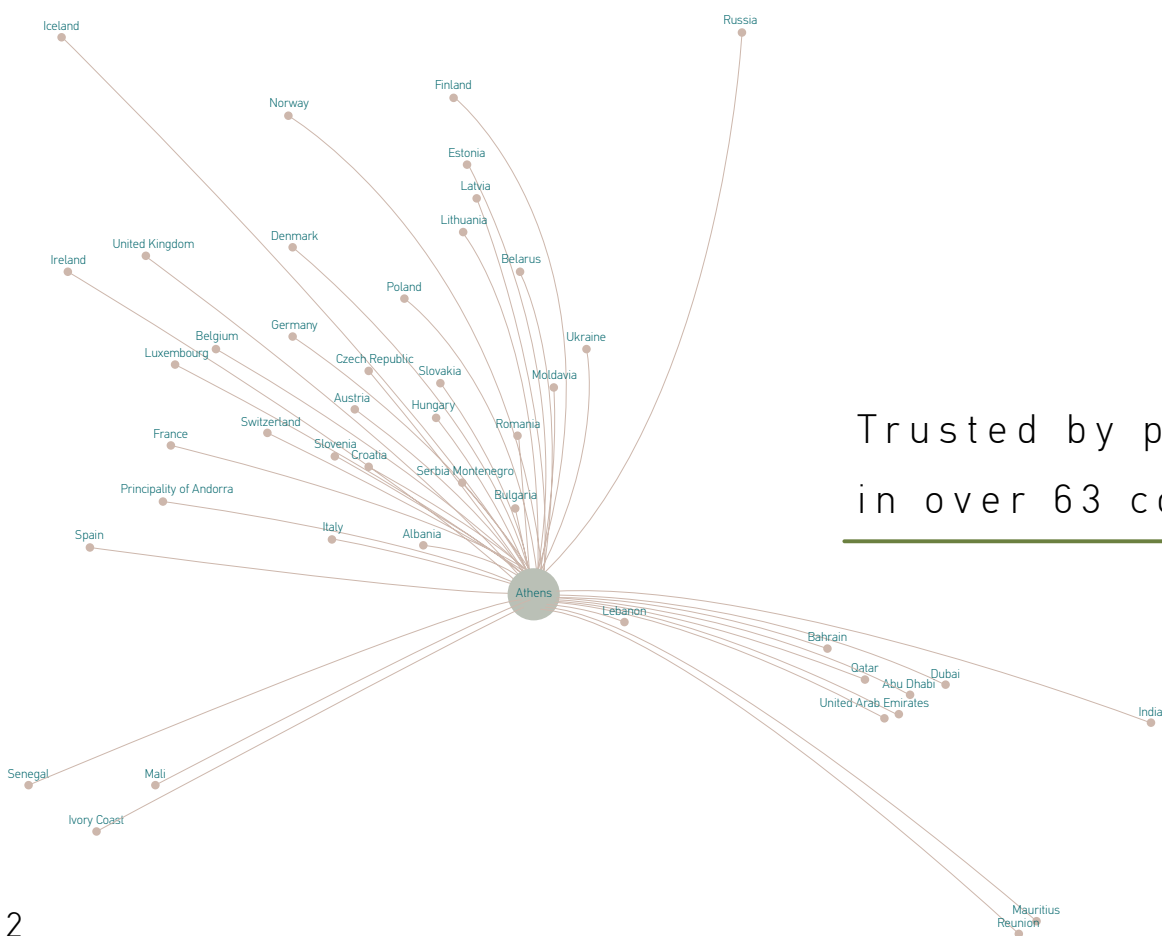

Trusted by professionals
in over 63 countries globally.

SUSTAINABILITY

Lighting the Future Responsibly.

We design lighting solutions that combine efficiency, durability and innovation - with minimal footprint and maximum purpose.

For us, green isn't just a color. It's a mindset shaping everything we create.



Scan to learn how we go green.



TABLE OF CONTENTS

- 01. PORTABLE | p.012-035
- 02. CONCRETE | p.036-059
- 03. FLOOR & WALL | p.060-157
- 04. WALL | p.158-251
- 05. SPIKES | p.252-299
- 06. STEP | p.300-331
- 07. CEILING | p.332-347
- 08. INGROUND | p.348-371
- 09. WALL WASHER | p.372-385
- 10. IP65 SURFACE LIGHTING SYSTEM | p.386-395

WE MAKE IT EASY

Virtual Light - ZambelisLights App



4 simple steps to light up your place

Download the
Virtual Light App
Scan QR

Find the ideal light
by browsing our
categories

View in your space
through your mobile
camera


Enjoy your
new atmosphere!







E300 p.314 **E324** p.316 **E294** p.318 **E242-W** p.320 **E241-G** p.321 **E241-W** p.321 **E247-G** p.324

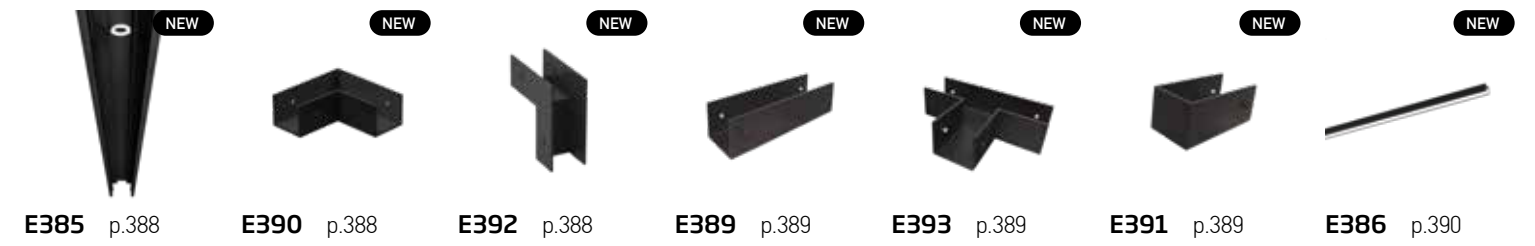

E385 p.388 **E390** p.388 **E392** p.388 **E389** p.389 **E393** p.389 **E391** p.389 **E386** p.390



E246-W p.325 **E229** p.326 **E230** p.327 **E184** p.328 **E181** p.328 **E187** p.330 **E333** p.334



E387 p.390 **E388** p.390 **E501** p.392 **E397** p.394 **SIL-385** p.394



S131 p.338 **S113** p.340 **E340** p.340 **E220** p.342 **E309** p.342 **E270** p.344 **E327** p.346



E502 p.350 **E504** p.352 **E508** p.356 **E180** p.358 **E178** p.359 **E365** p.360 **E366** p.363



E461 p.364 **E364** p.365 **E363** p.366 **E362** p.366 **E361** p.368 **E359** p.371 **E189** p.371




E496 p.374 **E495** p.376 **E499** p.378 **E382** p.380 **E380** p.383 **E377** p.384 **E375** p.384

Tap. Dim. Light Up.
Prepare warm ambience with portable lights.



01 . PORTABLE



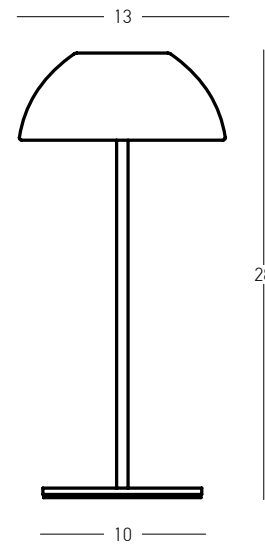

Power 2W
 Input 5V DC
 Battery 1200 MAH
 Color Temperature 2700K
 Lumen 104Lm
 Cri 80
 IP 44
 Dimensions Ø: 13cm H: 28cm
 Shade Ø: 13cm H: 5.5cm
 Touch Dimming
 Material Metal - Aluminium - PC Diffuser
 Special Feature Portable Table Lamp
 USB Cable Included
 Power-Off Memory Function
 Working Time 100% of Light - 5.5H
 50% of Light - 10H
 10% of Light - 135H
 Charging Time 3.5H
 Color Sandy Black / **Code E485**
 Color Sand / **Code E486**
 Color Sandy Milk Tea / **Code E487**




White AC-DC Adaptor for Portable Light




Input 220-240V, 50/60Hz
 Output 5V, 1A
 Color White / **Code E099**





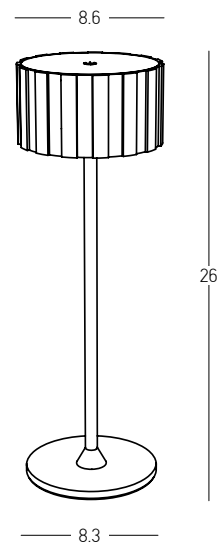

Power 2W
 Input 5V DC
 Battery 1800 MAH
 Color Temperature 2700K, 4000K, 6500K
 Lumen 124Lm
 Cri 80
 IP 44
 Dimensions Ø: 8.6cm H: 26cm
 Shade Ø: 8.6cm H: 4.7cm
 Touch Dimming ☉
 Material Metal - Aluminium - PC Diffuser
 Special Feature Portable Table Lamp
 USB Cable Included
 Power-Off & Brightness Memory Function
 Working Time 100% of Light - 6H
 50% of Light - 11.5H
 10% of Light - 60H
 Charging Time 4H
 Color Sand / **Code E488**
 Color Sandy Milk Tea / **Code E489**
 Color Sandy Green / **Code E490**

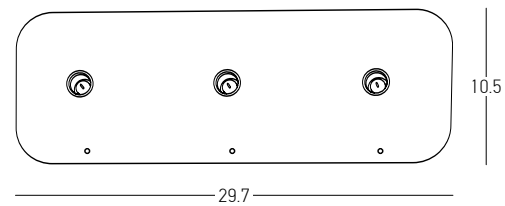


Input 220-240V, 50/60Hz
 Output 5V, 2A
 IP 20
 Dimensions L: 29.7cm W: 10.5cm H: 2cm
 Material Aluminium
 Special Feature Portable Charging Base for 3pcs
 100cm Cable Included
 Color Black / **Code 25280**


White AC-DC Adaptor for Portable Light



Input 220-240V, 50/60Hz
 Output 5V, 1A
 Color White / **Code E099**



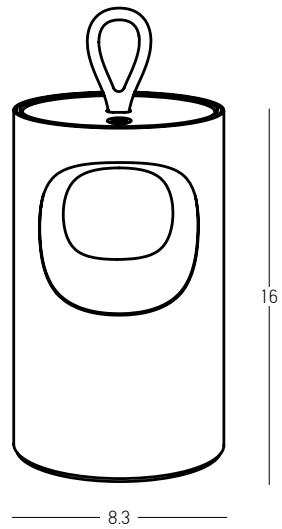


Power 2W
 Input 5V DC
 Battery 2000 MAH
 Color Temperature 2700K
 Lumen 103Lm
 Cri 80
 IP 44
 Dimensions L: 8.3cm W: 6cm H: 16cm
 Touch Dimming 
 Material Metal - Aluminium - PC Diffuser
 Special Feature Portable Table Lamp
 Charging Base with USB Cable Included
 Power-Off Memory Function
 Working Time 100% of Light - 6H
 50% of Light - 11H
 10% of Light - 95H
 Charging Time 3.5H
 Color Black Matt / **Code E482**
 Color White Matt / **Code E483**
 Color Brushed Gold / **Code E484**





White AC-DC Adaptor for Portable Light



Input 220-240V, 50/60Hz
 Output 5V, 1A
 Color White / **Code E099**

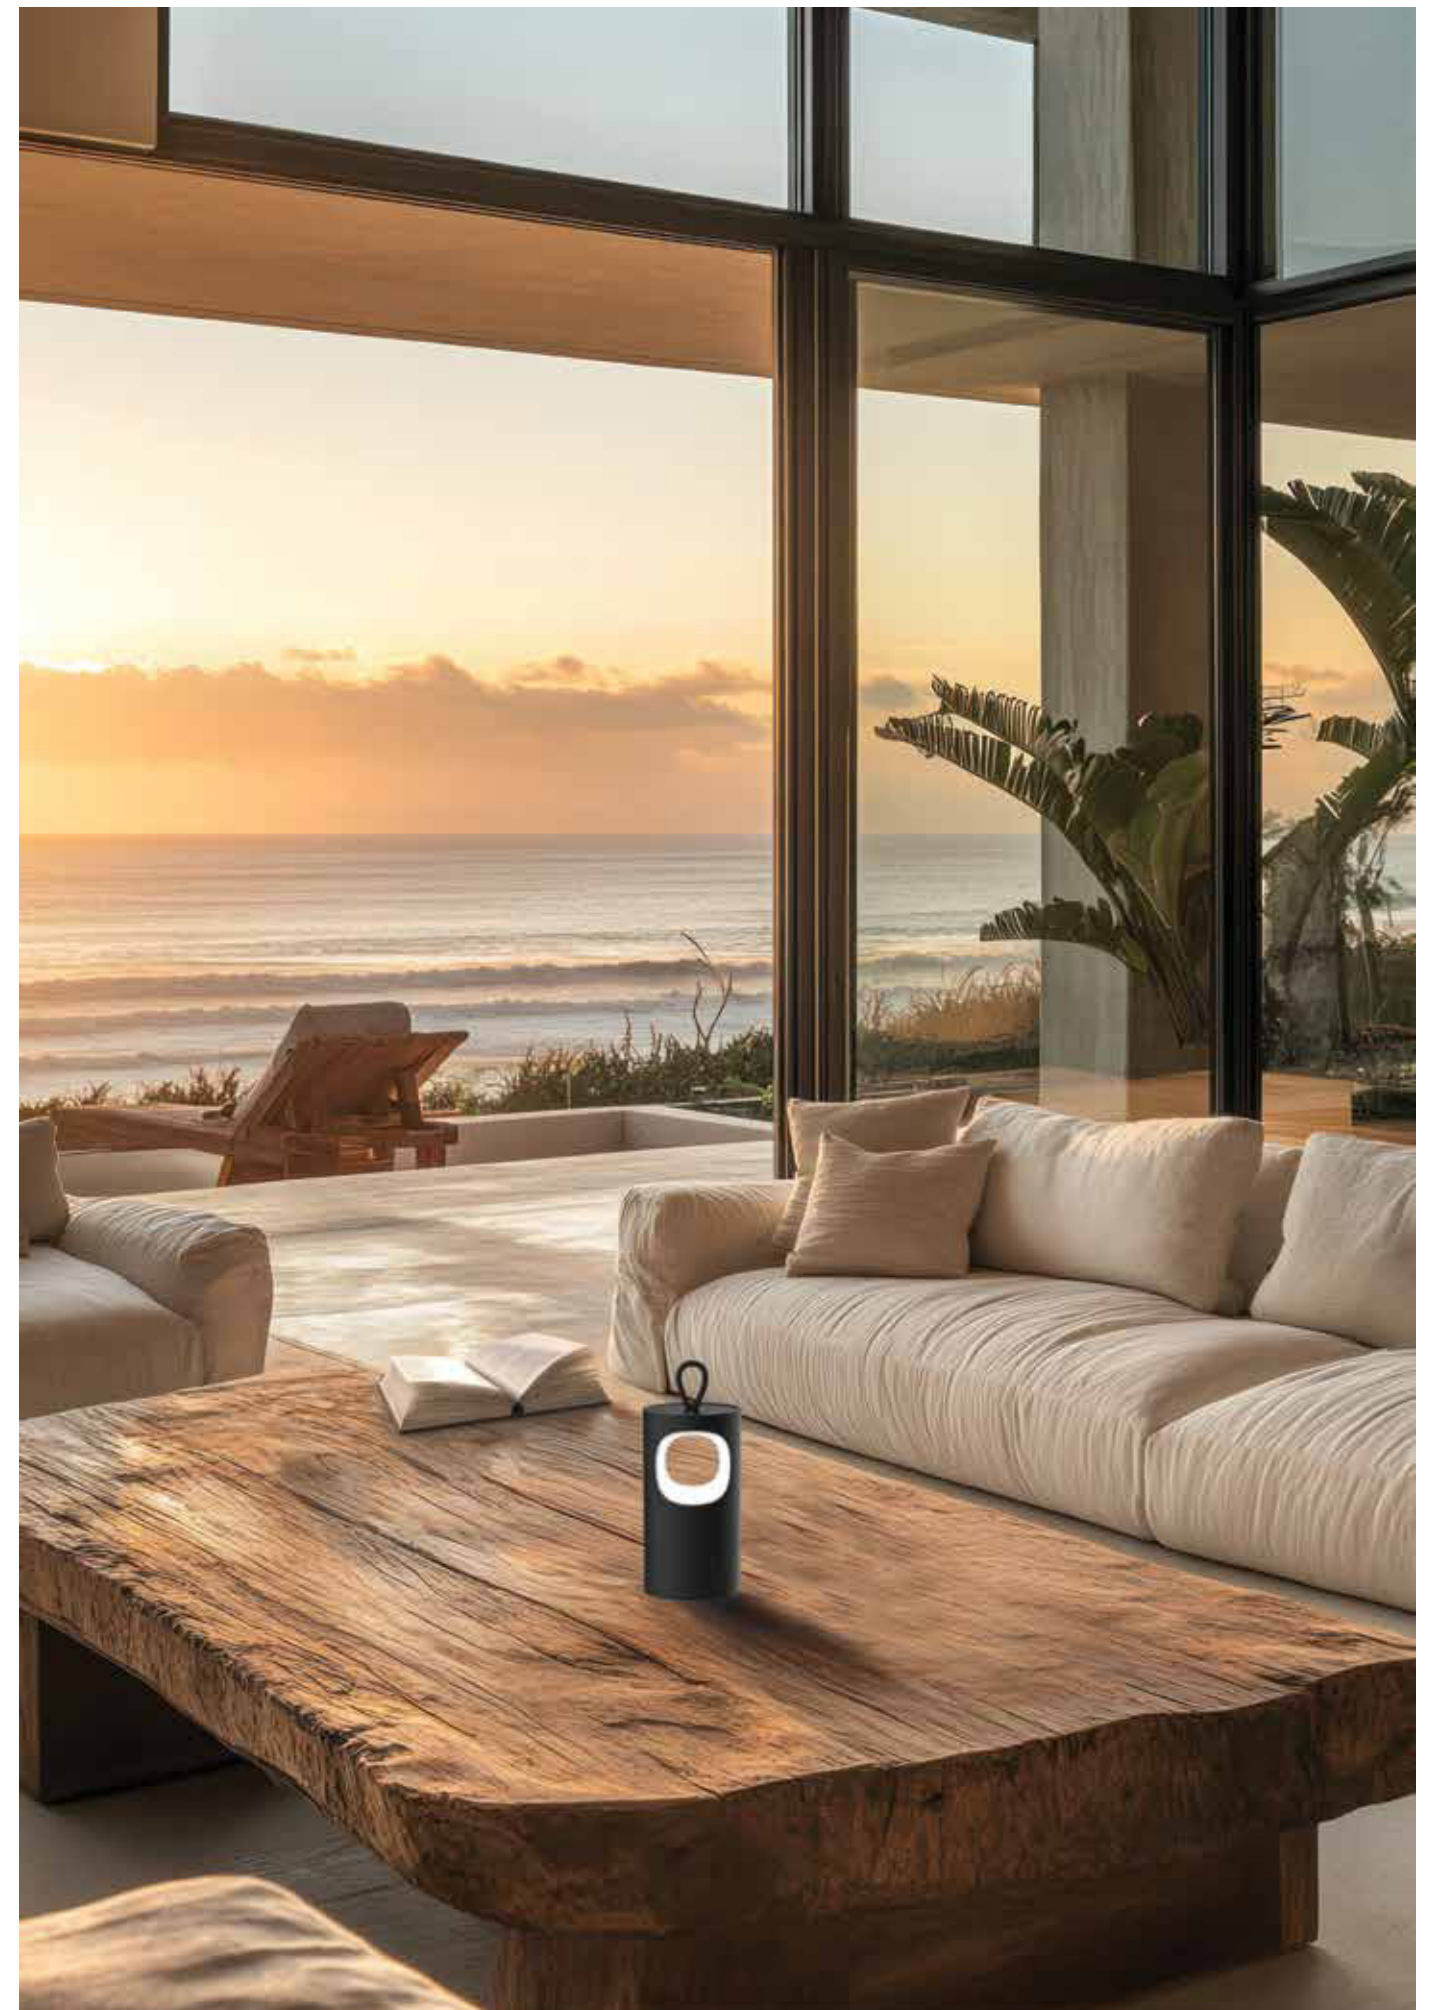

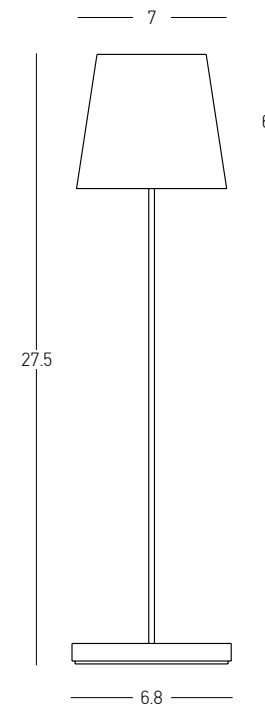

Power 1.5W
 Input 5V DC
 Battery 1900 MAH
 Color Temperature 3000K
 Lumen 181Lm
 Cri 80
 IP 54
 Dimensions Ø: 7cm H: 27.5cm
 Shade Ø: 7cm H: 6cm
 Touch Dimming 
 Material Metal - Aluminium - PC Diffuser
 Special Feature Portable Table Lamp
 Charging Base with USB Cable Included
 Power-Off Memory Function
 Working Time 100% of Light - 10H
 50% of Light - 20H
 10% of Light - 100H
 Charging Time 4H
 Color Black / **Code E369**
 Color Brick / **Code E370**
 Color Sand / **Code E371**




White AC-DC Adaptor for Portable Light





Input 220-240V, 50/60Hz
 Output 5V, 1A
 Color White / **Code E099**



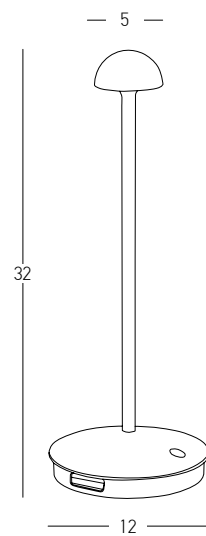

Power 2W
 Input 3.7V DC
 Battery 1800 MAH
 Color Temperature 3000K
 Lumen 124Lm
 Cri 80
 IP 54
 Dimensions Ø: 12cm H: 32cm
 Shade Ø: 5cm H: 2.6cm
 Touch Dimming ☉
 Material Metal - Aluminium - PC Frosted
 Special Feature Portable Table Lamp
 USB Cable & Adaptor Included
 Power-Off Memory Function
 Working Time
 100% of Light - 7H
 50% of Light - 14H
 10% of Light - 70H
 Charging Time 4.5H
 Color Sandy Black / **Code E314**
 Color Sandy White / **Code E313**

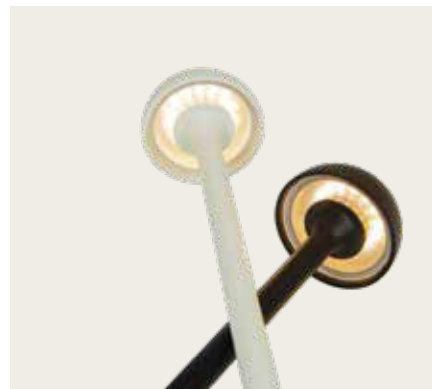

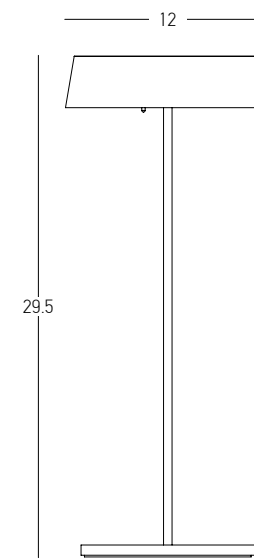


Power	2W
Input	3.7V DC
Battery	2200 MAH
Color Temperature	3000K
Lumen	210Lm
Cri	80
IP	54
Dimensions	Ø: 12cm H: 29.5cm
Shade	Ø: 12cm H: 3.2cm
Touch Dimming	○
Material	Metal - Aluminium - PC Diffuser
Special Feature	Portable Table Lamp USB Cable Included Power-Off Memory Function
Working Time	100% of Light - 10H 50% of Light - 20H 10% of Light - 110H
Charging Time	5H
Color	Sandy Black / Code E289
Color	Sandy White / Code E290
Color	Gold Matt / Code E291



White AC-DC Adaptor for Portable Light



Input	220-240V, 50/60Hz
Output	5V, 1A
Color	White / Code E099

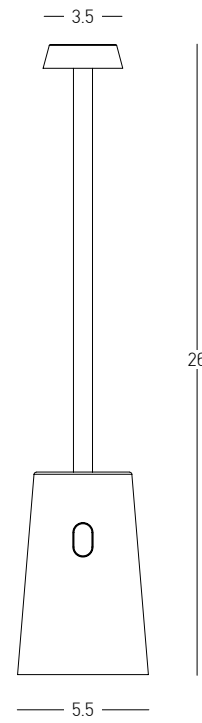

Power 2W
 Input 3.7V DC
 Battery 2000 MAH
 Color Temperature 3000K
 Lumen 168Lm
 Cri 80
 IP 44
 Dimensions Ø: 5.5cm H: 26cm
 Shade Ø: 3.5cm H: 1cm
 Touch Dimming ○
 Material Metal - Aluminium - Glass
 Special Feature Portable Table Lamp
 Charging Base with USB Cable Included
 Power-Off Memory Function
 Working Time 100% of Light - 8H
 50% of Light - 16H
 10% of Light - 80H
 Charging Time 4.5H
 Color White / **Code E398**
 Color Black / **Code E399**
 Color Green / **Code E400**





White AC-DC Adaptor for Portable Light



Input 220-240V, 50/60Hz
 Output 5V, 1A
 Color White / **Code E099**



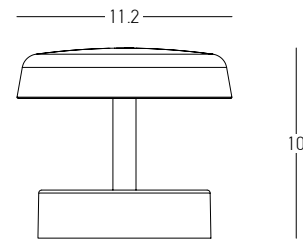

Power 1W
 Input 5V DC
 Battery 1200 MAH
 Color Temperature 3000K
 Lumen 80Lm
 Cri 80
 IP 44
 Dimensions Ø: 11.2cm H: 10cm
 Shade Ø: 11.2cm H: 2.4cm
 Touch Dimming 
 Material Plastic
 Special Feature Portable Table Lamp
 USB Cable Included
 Power-Off Memory Function
 Working Time 100% of Light - 6H
 50% of Light - 12H
 10% of Light - 70H
 Charging Time 3.5H
 Color White / **Code E401**
 Color Black / **Code E402**



White AC-DC Adaptor for Portable Light




Input 220-240V, 50/60Hz
 Output 5V, 1A
 Color White / **Code E099**





Power 2W
 Input 3.7V DC
 Battery 2200 MAH
 Color Temperature 3000K
 Lumen 260Lm
 Cri 80
 IP 54
 Dimensions Ø: 11cm H: 38cm
 Shade Ø: 11cm H: 10.5cm
 Touch Dimming ☉
 Material Metal - Aluminium - PC Diffuser
 Special Feature Portable Table Lamp
 USB Cable & Adaptor Included
 Power-Off Memory Function
 Working Time 100% of Light - 10H
 50% of Light - 20H
 10% of Light - 100H
 Charging Time 5.5H
 Color Sandy White / Code E193
 Color Sandy Black / Code E194

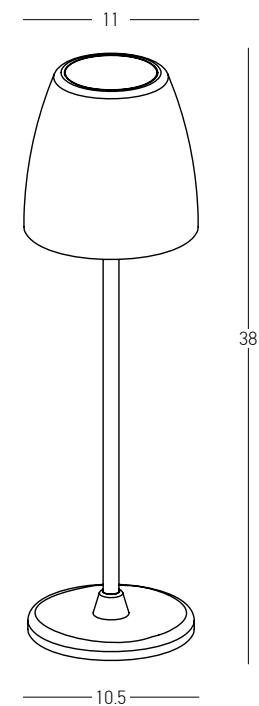


Concrete Glow - Natural Flow
Rugged elegance for unique outdoor space.




02. CONCRETE




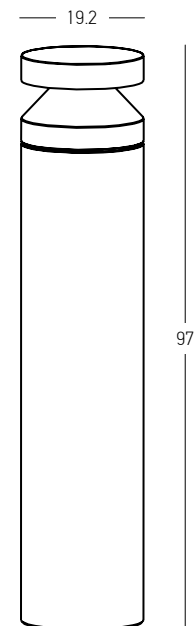

Power 20W
 Input 220-240V, 50/60Hz
 Color Temperature 3000K
 Lumen 509Lm
 Cri 90
 IP 65
 Dimensions Ø: 19.2cm H: 97cm
 Base Ø: 19.2cm H: 0.3cm
 Material Concrete - Metal - Glass
 Color Natural Concrete / **Code E478**

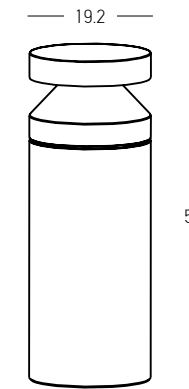



Power 20W
 Input 220-240V, 50/60Hz
 Color Temperature 3000K
 Lumen 509Lm
 Cri 90
 IP 65
 Dimensions Ø: 19.2cm H: 52cm
 Base Ø: 19.2cm H: 0.3cm
 Material Concrete - Metal - Glass
 Color Natural Concrete / **Code E477**

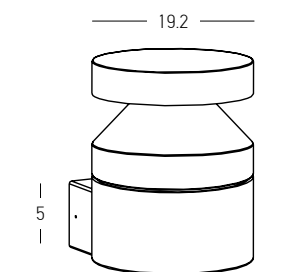

Power 15W
 Input 220-240V, 50/60Hz
 Color Temperature 3000K
 Lumen 414Lm
 Cri 90
 IP 65
 Dimensions Ø: 19.2cm L: 21.5cm H: 24cm
 Base W: 12cm H: 5cm
 Material Concrete - Metal - Glass
 Color Natural Concrete / **Code E474**






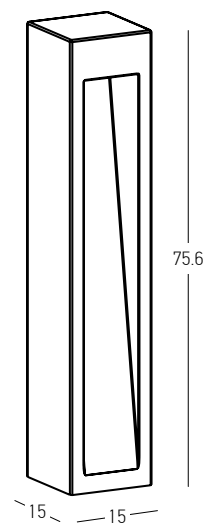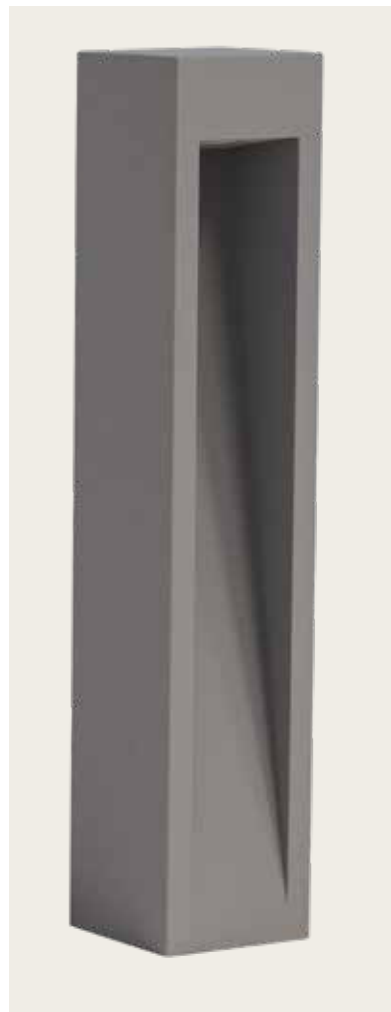


Power 9W
 Input 220-240V, 50/60Hz
 Color Temperature 3000K
 Lumen 426Lm
 Cri 90
 IP 65
 Dimensions L: 15cm W: 15cm H: 75.6cm
 Material Concrete - Metal - Glass
 Color Natural Concrete / **Code E475**



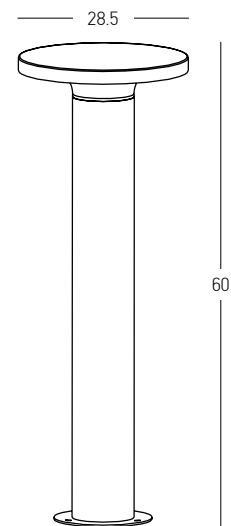


Power 11W
 Input 220-240V, 50/60Hz
 Color Temperature 3000K
 Lumen 755Lm
 Cri 90
 IP 65
 Dimensions Ø: 28.5cm H: 60cm
 Base Ø: 16.5cm H: 0.3cm
 Shade Ø: 28.5cm H: 2.2cm
 Material Concrete - Metal - PC Diffuser
 Color Natural Concrete-Sandy Black / Code **E476**







Power 4W
 Input 220-240V, 50/60Hz
 Color Temperature 3000K
 Lumen 340Lm
 Cri 80
 IP 65
 Dimensions L: 9.7cm W: 9.1cm H: 10.5cm
 Beam Angle 36°
 Dimmable Triac
 Material Concrete - Aluminium
 Color Natural Concrete / **Code E253**

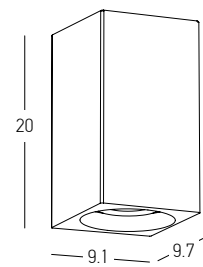


Power 2x 4W
 Input 220-240V, 50/60Hz
 Color Temperature 3000K
 Lumen 600Lm
 Cri 80
 IP 65
 Dimensions L: 9.7cm W: 9.1cm H: 20cm
 Beam Angle 36°
 Dimmable Triac
 Material Concrete - Aluminium
 Special Feature Up-Down Lighting
 Color Natural Concrete / **Code E254**

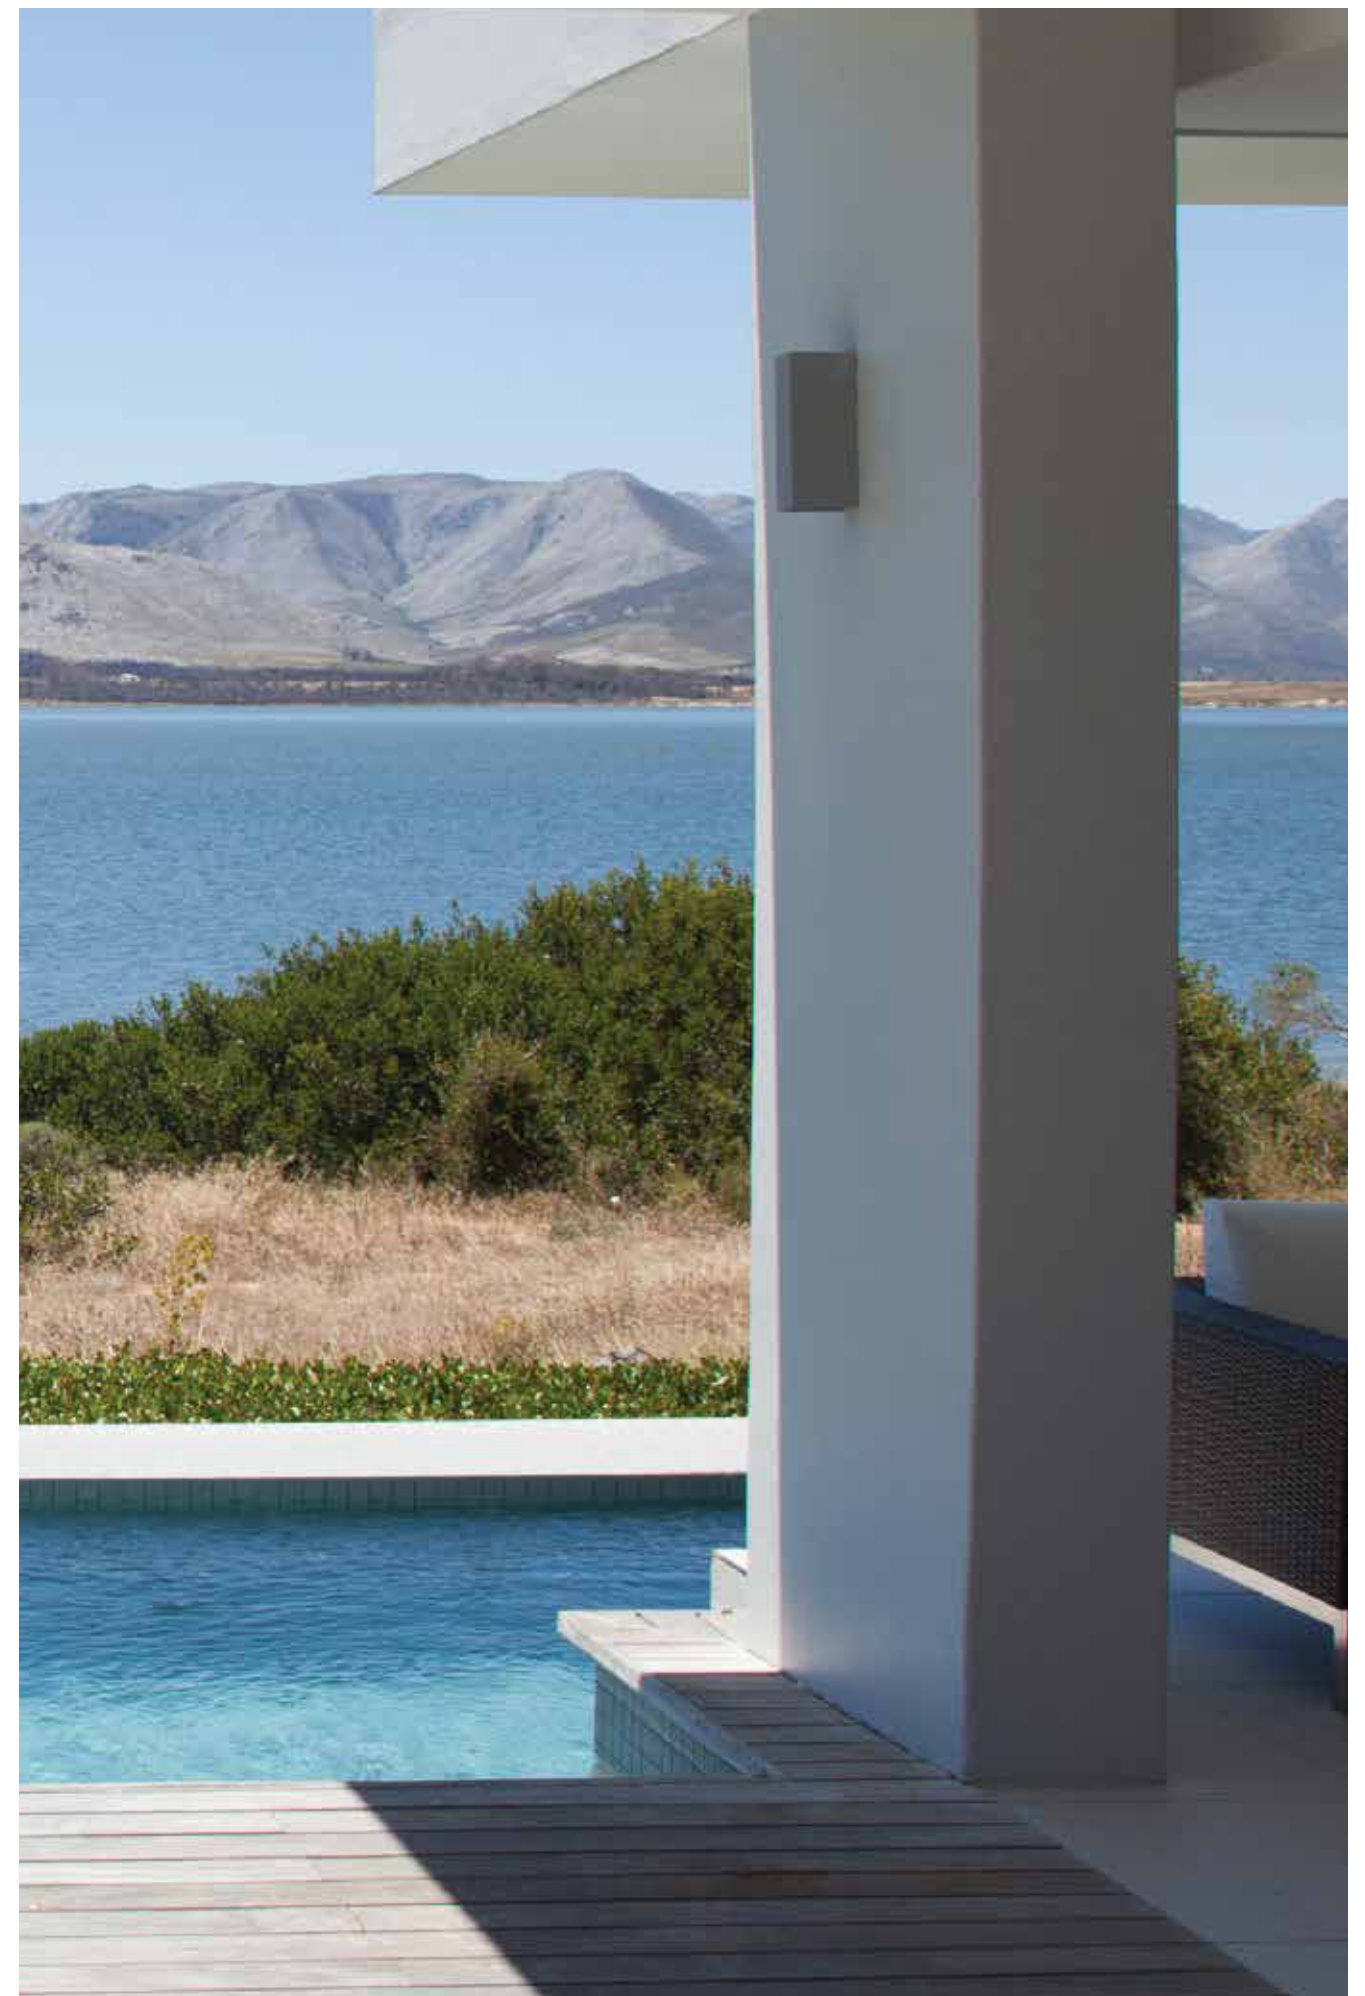

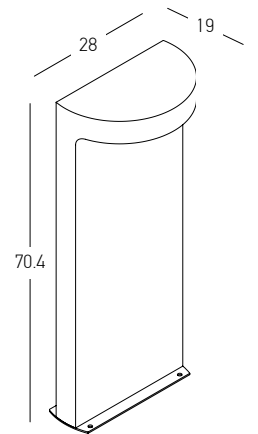


Power 8W
 Input 220-240V, 50/60Hz
 Color Temperature 3000K
 Lumen 490Lm
 Cri 80
 IP 65
 Dimensions L: 19cm W: 28cm H: 70.4cm
 Base L: 10cm W: 28cm H: 0.5cm
 Material Concrete - Metal - Glass
 Color Natural Concrete / **Code E383**

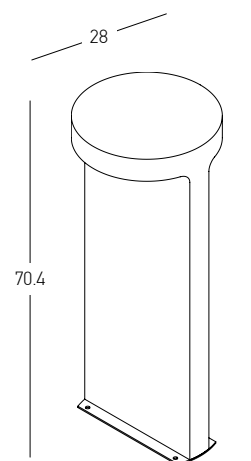

Power 2x 8W
 Input 220-240V, 50/60Hz
 Color Temperature 3000K
 Lumen 780Lm
 Cri 80
 IP 65
 Dimensions Ø: 28cm H: 70.4cm
 Base L: 10cm W: 28cm H: 0.5cm
 Material Concrete - Metal - Glass
 Color Natural Concrete / **Code E384**



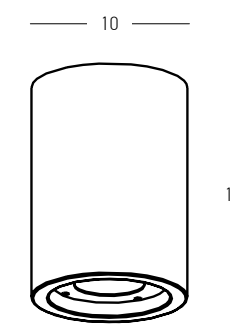


Bulb	1x GU10 LED
Power	9W MAX
Input	220-240V, 50/60Hz
IP	54
Dimensions	Ø: 10cm H: 14cm
Material	Concrete - Metal
Color	Natural Concrete / Code E480







Power 10W
 Input 220-240V, 50/60Hz
 Color Temperature 3000K
 Lumen 363Lm
 Cri 90
 IP 65
 Dimensions Ø: 8.6cm H: 58.3cm
 Base Ø: 12.5cm H: 0.5cm
 Material Concrete - Metal - PC Diffuser
 Color Natural Concrete-Black / **Code E410**


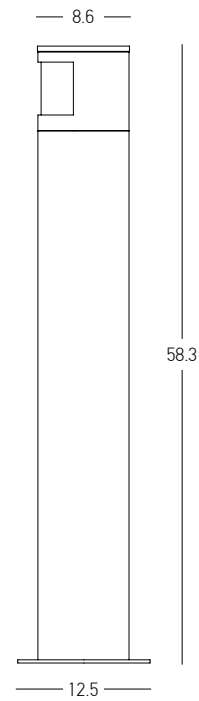


Power 10W
 Input 220-240V, 50/60Hz
 Color Temperature 3000K
 Lumen 395Lm
 Cri 90
 IP 65
 Dimensions Ø: 8.6cm H: 58.3cm
 Base Ø: 12.5cm H: 0.5cm
 Material Concrete - Metal - PC Diffuser
 Color Natural Concrete-Black / **Code E411**

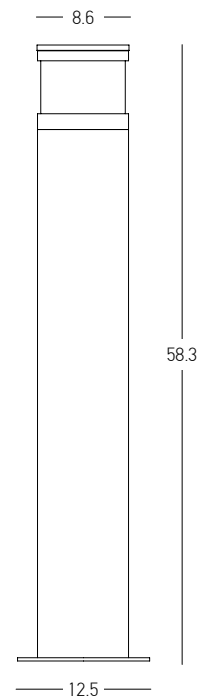


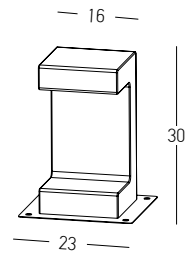

Power 8W
 Input 220-240V, 50/60Hz
 Color Temperature 3000K
 Lumen 490Lm
 Cri 90
 IP 54
 Dimensions L: 15cm W: 16cm H: 30cm
 Base L: 21cm W: 23cm
 Material Concrete
 Color Natural Concrete / **Code E191**

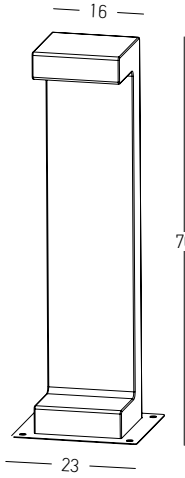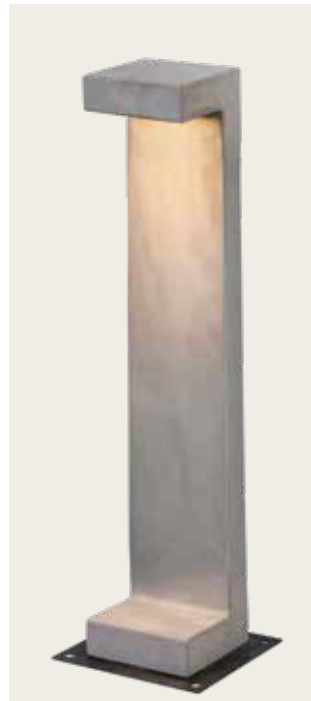

Power 8W
 Input 220-240V, 50/60Hz
 Color Temperature 3000K
 Lumen 490Lm
 Cri 90
 IP 54
 Dimensions L: 15cm W: 16cm H: 70cm
 Base L: 21cm W: 23cm
 Material Concrete
 Color Natural Concrete / **Code E192**

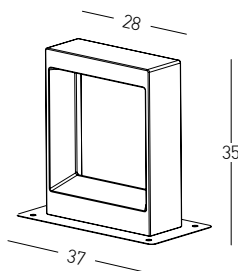


Power 8W
 Input 220-240V, 50/60Hz
 Color Temperature 3000K
 Lumen 490Lm
 Cri 90
 IP 54
 Dimensions L: 10cm W: 28cm H: 35cm
 Base L: 19cm W: 37cm
 Material Concrete
 Color Natural Concrete / **Code E190**





Power 7W
 Input 24V
 Color Temperature 3000K
 Lumen 135Lm
 Cri 90
 IP 65
 Dimensions Ø: 20cm H: 12cm
 Material Concrete - Glass
 Special Feature Spike & Base Included
 Recommended Driver LPV-35-24 (Not Included)
 In Parallel Connection 1-4pcs
 Color Natural Concrete / **Code E479**

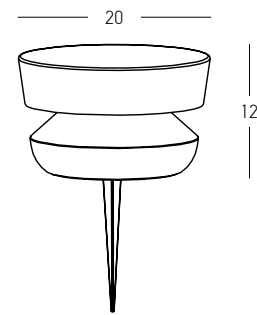


Wall to Floor - One Style
Seamless design connection across surfaces.





03. FLOOR & WALL



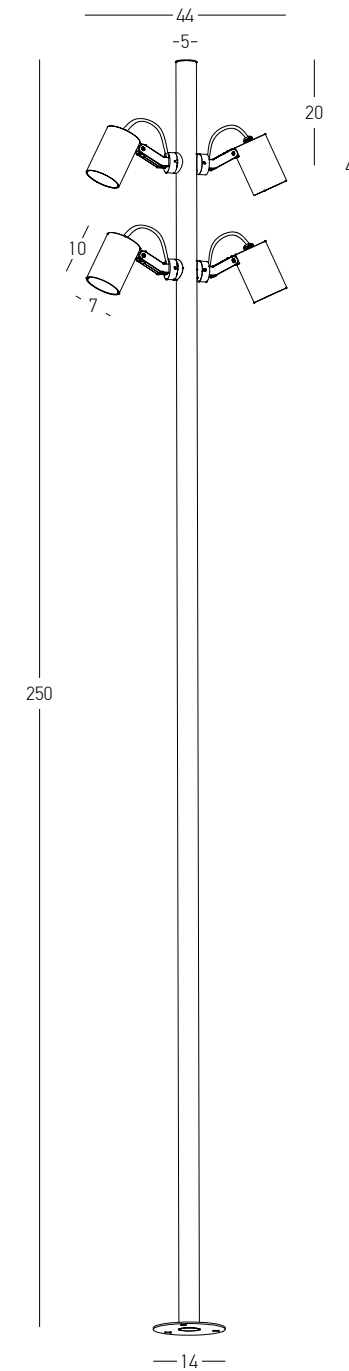


Power	35W
Input	220-240V, 50/60Hz
Color Temperature	3000K
Lumen	2148Lm
Cri	90
IP	65
Dimensions	L: 44cm W: 7cm H: 250cm
Spots	Ø: 7cm H: 10cm
Base	Ø: 14cm H: 0.5cm
Beam Angle	60°
Material	Aluminium
Special Feature	Tilt Up Down Spots
Color	Sandy Black / Code E406

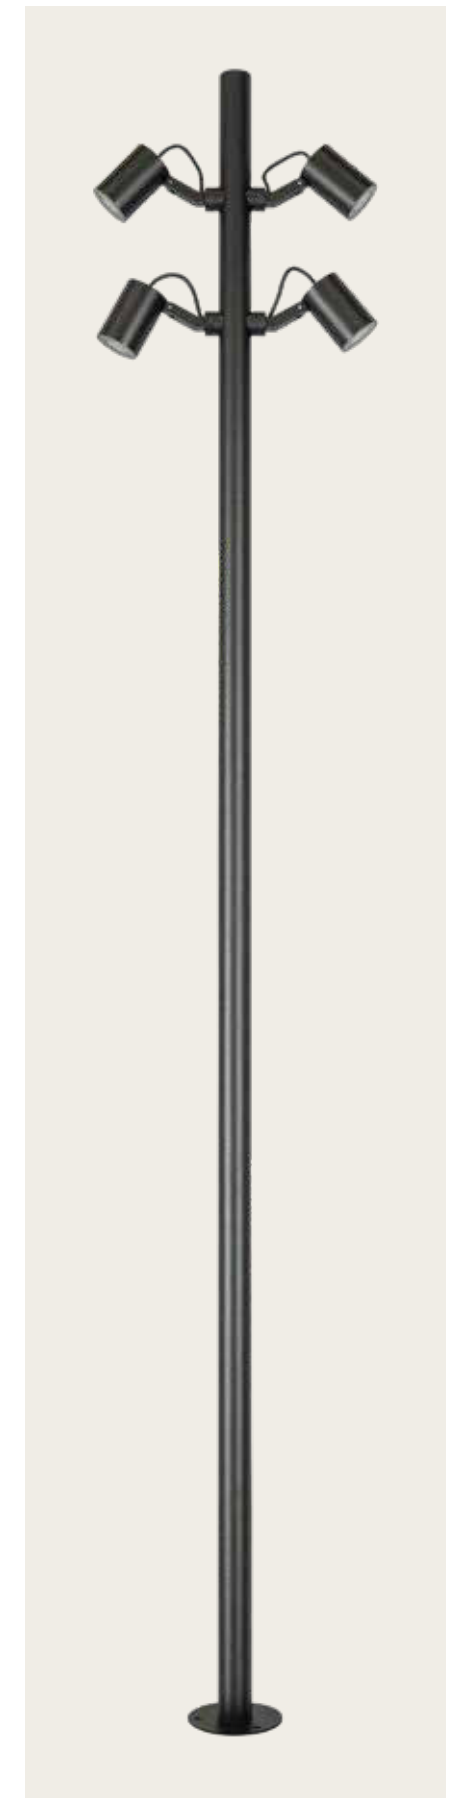

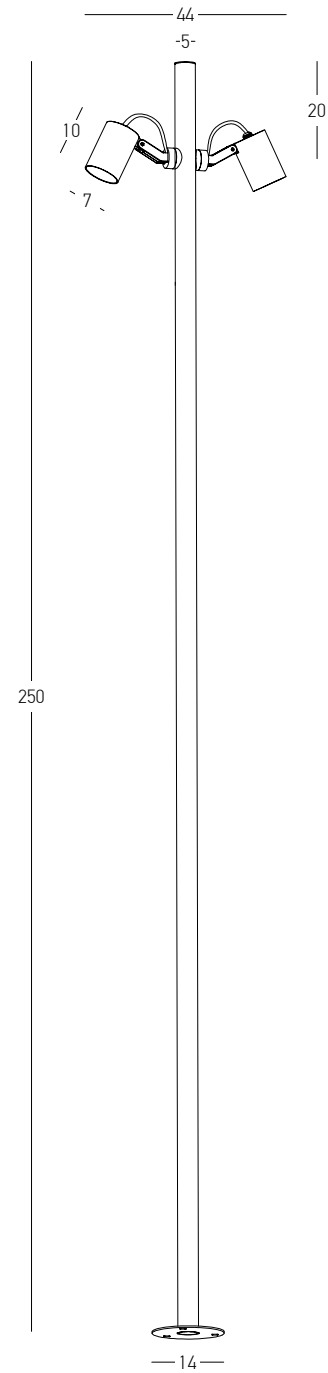


Power 17W
 Input 220-240V, 50/60Hz
 Color Temperature 3000K
 Lumen 1072Lm
 Cri 90
 IP 65
 Dimensions L: 44cm W: 7cm H: 250cm
 Spots Ø: 7cm H: 10cm
 Base Ø: 14cm H: 0.5cm
 Beam Angle 60°
 Material Aluminium
 Special Feature Tilt Up Down Spots
 Color Sandy Black / **Code E405**





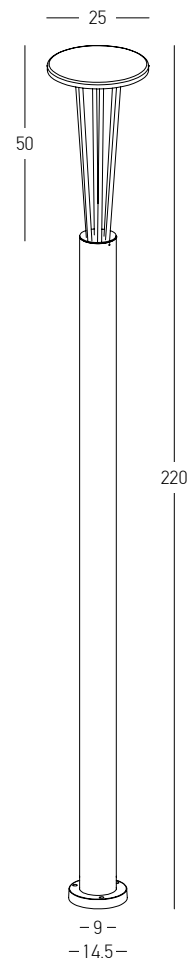

Power 15.5W
 Input 220-240V, 50/60Hz
 Color Temperature 3000K
 Lumen 1005Lm
 Cri 85
 IP 65
 Dimensions Ø: 25cm H: 220cm
 Base Ø: 14.5cm H: 2.5cm
 Material Aluminium - PC Diffuser
 Color Graphite / **Code E445**



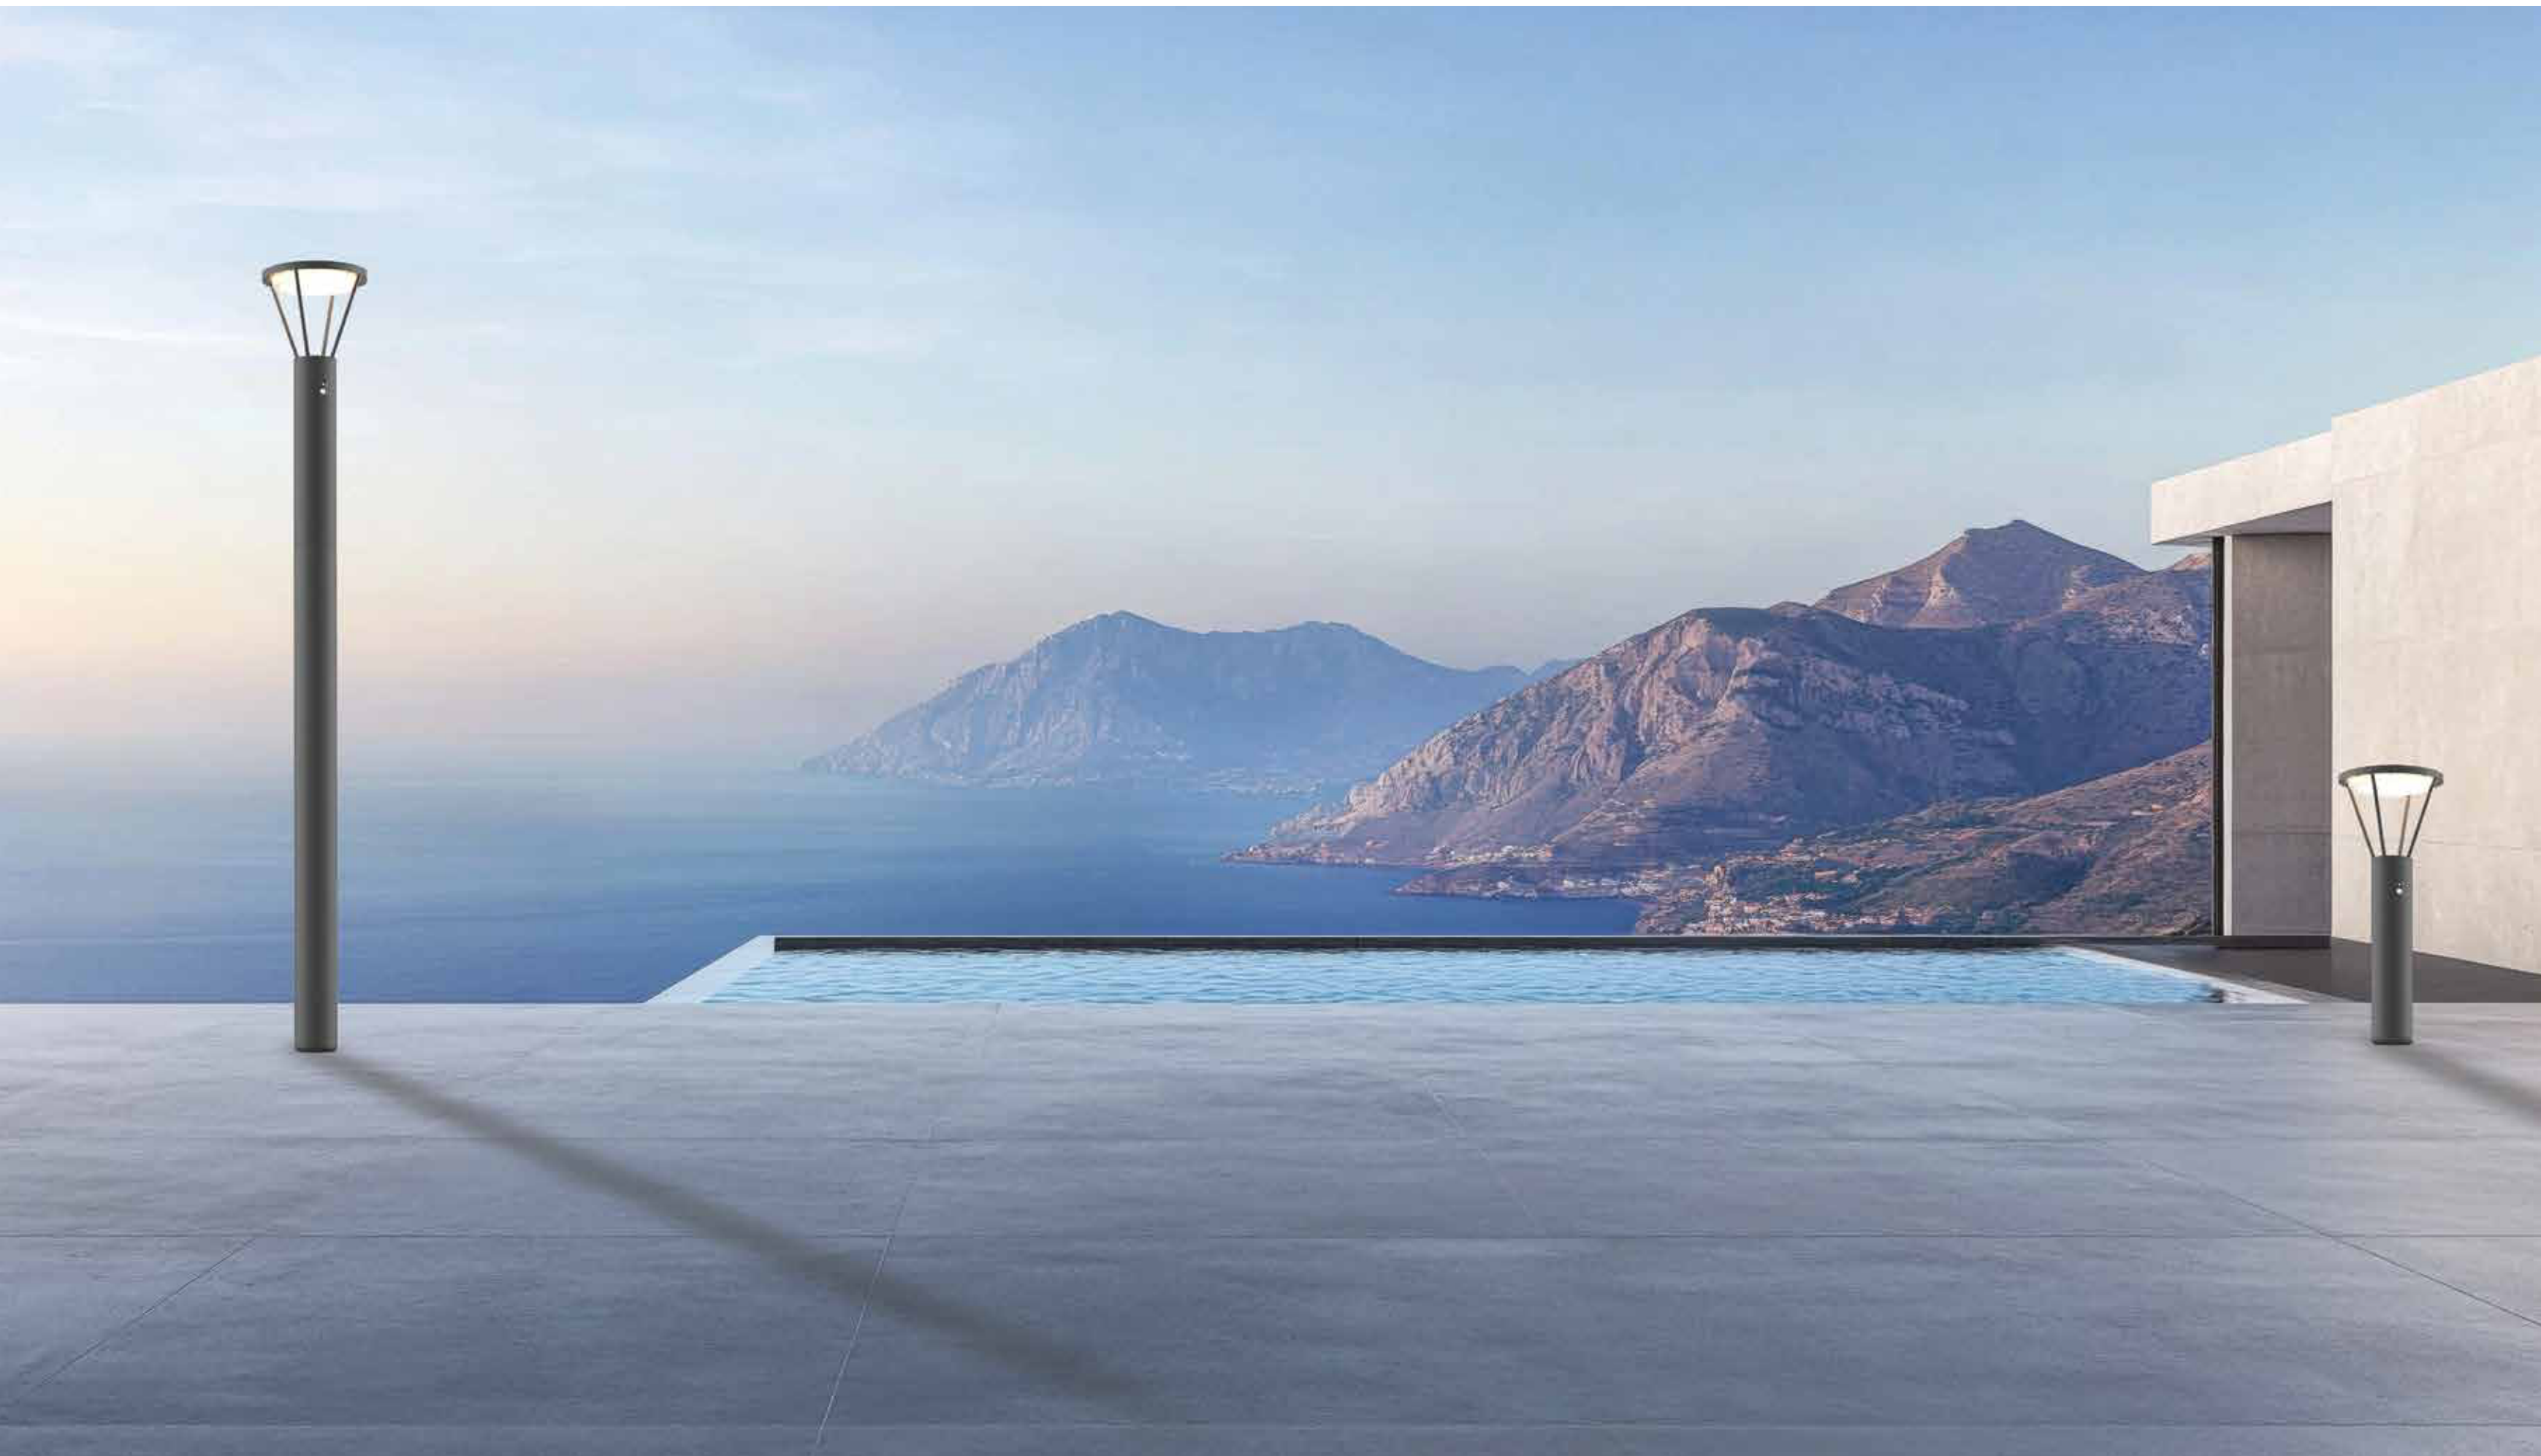

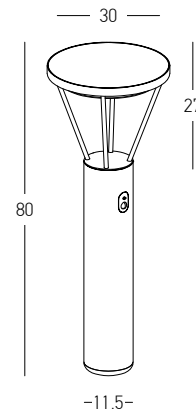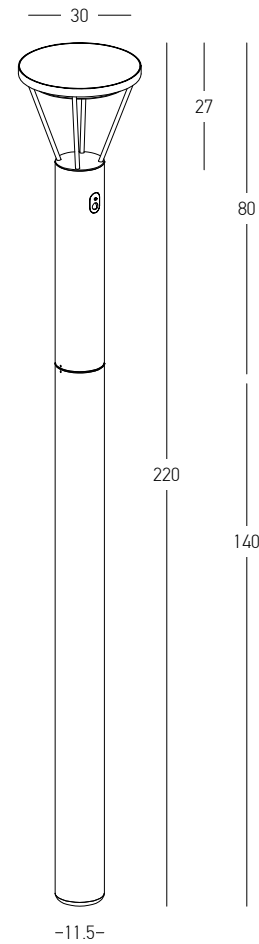

Power 5W
 Input 3.7V DC
 Battery 2x2200 MAH
 Color Temperature 3000K
 Lumen 378Lm
 Cri 80
 IP 54
 Dimensions Ø: 30cm H: 80-220cm
 Material Aluminium - PC Diffuser
 Special Feature Solar Panel
 3 Lighting Modes
 Sense Distance 3-5m
 Color Graphite / **Code E448**



LIGHTING MODES OVERVIEW

Mode 1 • Dim + Motion Sensor


LED operates at 10% brightness when ambient light <20 lux. Upon motion detection, brightness increases to 100% during movement. After 5 hours, standby dims to 5%, and motion-triggered output drops to 70%. Lamp switches off when ambient light >20 lux.

Mode 2 • Constant Light


Motion sensor disabled. LED runs at 50% when ambient light <20 lux, reduces to 30% after 2 hours, and 20% after 5 hours. Turns off when ambient light >20 lux.

Mode 3 • Motion Only

No light at standby. LED activates at 100% upon motion detection and stays on for 25 seconds after movement stops. After 5 hours, motion-triggered output reduces to 70%. Turns off automatically when ambient light >20 lux.

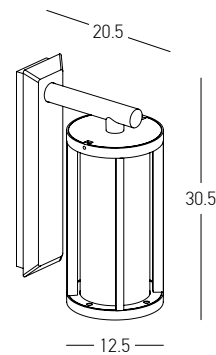


Bulb 1x E27
 Power 15W MAX
 Input 220-240V, 50/60Hz
 IP 65
 Dimensions L: 20.5cm W: 12.5cm H: 30.5cm
 Base L: 3cm W: 7.5cm H: 28.5cm
 Shade Ø: 12.5cm H: 24cm
 Material Aluminium - Clear Diffuser
 Color Sandy Black / Code E338

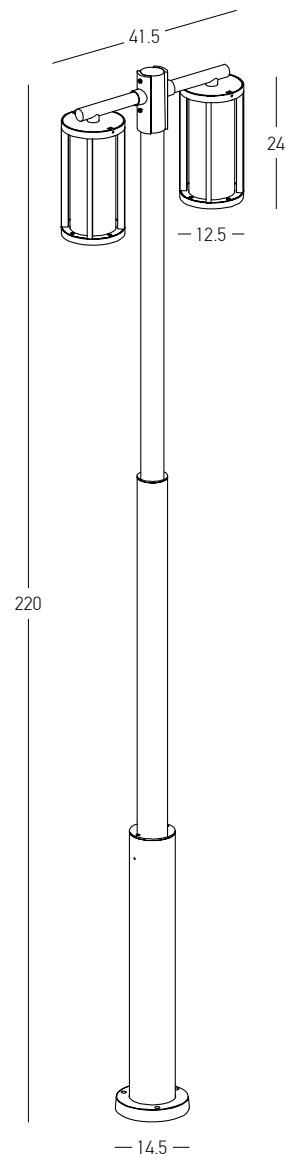

Bulb 2x E27
 Power 15W MAX
 Input 220-240V, 50/60Hz
 IP 65
 Dimensions L: 12.5cm W: 41.5cm H: 220cm
 Base Ø: 14.5cm H: 3cm
 Shades Ø: 12.5cm H: 24cm
 Material Aluminium - Clear Diffuser
 Color Sandy Black / Code E339





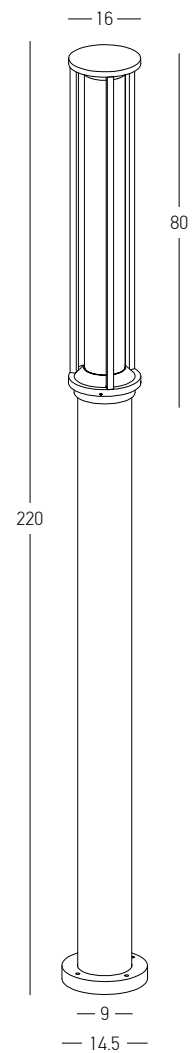


Power 17W
 Input 220-240V, 50/60Hz
 Color Temperature 3000K
 Lumen 1488Lm
 Cri 80
 IP 65
 Dimensions Ø: 16cm H: 220cm
 Base Ø: 14.5cm H: 2.5cm
 Material Aluminium - PC Diffuser
 Color Graphite / Code E348





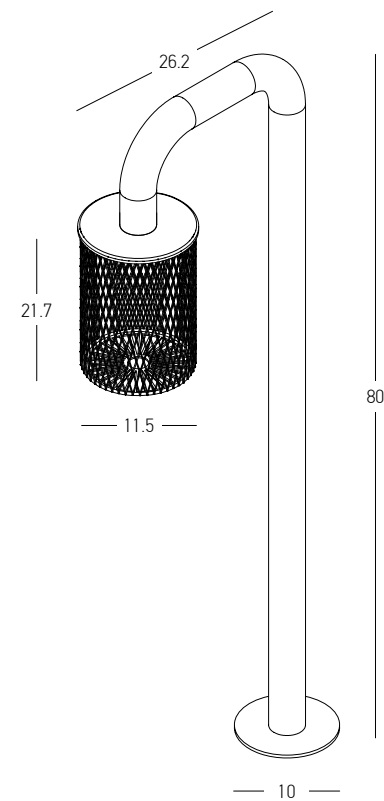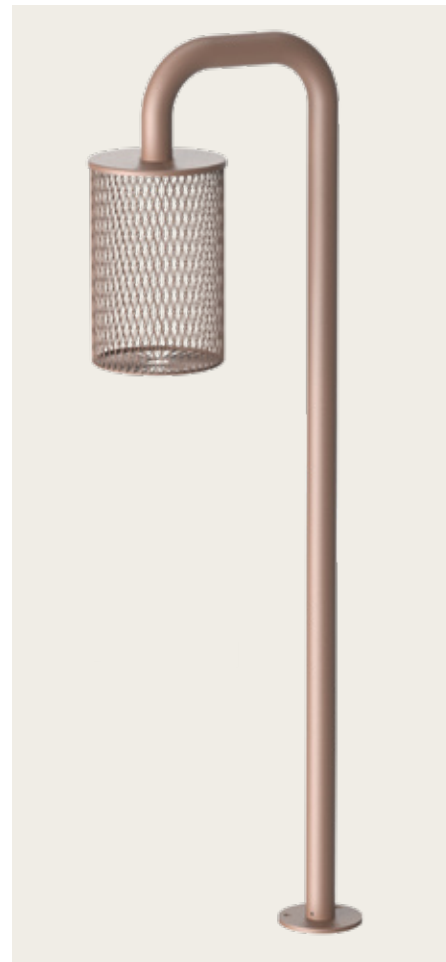


Power 6W
 Input 220-240V, 50/60Hz
 Color Temperature 3000K
 Lumen 360Lm
 Cri 80
 IP 65
 Dimensions Ø: 11.5cm L: 26.2cm H: 80cm
 Base Ø: 10cm H: 0.5cm
 Material Aluminium - Acrylic
 Color Sandy Coffee / **Code E523**

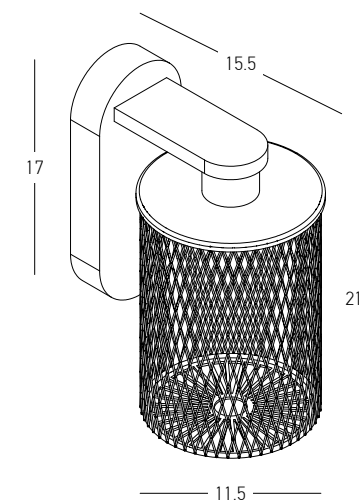


Power 6W
 Input 220-240V, 50/60Hz
 Color Temperature 3000K
 Lumen 360Lm
 Cri 80
 IP 54
 Dimensions Ø: 11.5cm L: 15.5cm H: 25cm
 Base L: 3cm W: 7cm H: 17cm
 Material Aluminium - Acrylic
 Color Sandy Coffee / **Code E522**



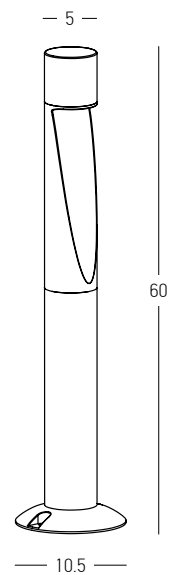

Power 6W
 Input 220-240V, 50/60Hz
 Color Temperature 3000K
 Lumen 187Lm
 Cri 90
 IP 65
 Dimensions Ø: 5cm H: 60cm
 Base Ø: 10.5cm
 Material Aluminium - Glass
 Color Sandy Black / Code E463



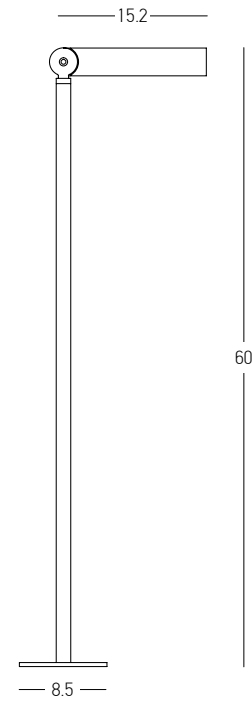


Power	8W
Input	24V, 50/60Hz
Color Temperature	3000K
Lumen	363Lm
Cri	90
IP	65
Dimensions	L: 15.2cm W: 4cm H: 60cm
Base	Ø: 8.5cm H: 0.5cm
Beam Angle	36°
Material	Aluminium - Tempered Glass
Recommended Driver	LPV-35-24 (Not Included)
Special Feature	In Parallel Connection 1-4pcs Tilt Up-Down Connection Box Included
Color	Sandy Black / Code E407




Driver	LPV-35-24
Power	35W
Input	220-240V, 50/60Hz
Output	24V
Dimensions	L: 14.8cm W: 4cm H: 3cm
IP	67



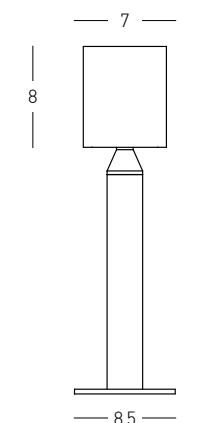





Power	8W
Input	220-240V, 50/60Hz
Color Temperature	3000K
Lumen	363Lm
Cri	90
IP	65
Dimensions	Ø: 7cm H: 30cm
Base	Ø: 8.5cm H: 0.5cm
Shade	Ø: 7cm H: 8cm
Material	Aluminium - Tempered Glass
Special Feature	Connection Box Included
Color	Sandy Black / Code E408



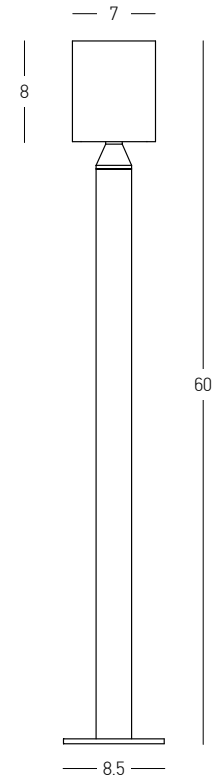


Power 8W
 Input 220-240V, 50/60Hz
 Color Temperature 3000K
 Lumen 363Lm
 Cri 90
 IP 65
 Dimensions Ø: 7cm H: 60cm
 Base Ø: 8.5cm H: 0.5cm
 Shade Ø: 7cm H: 8cm
 Material Aluminium - Tempered Glass
 Special Feature Connection Box Included
 Color Sandy Black / **Code E409**

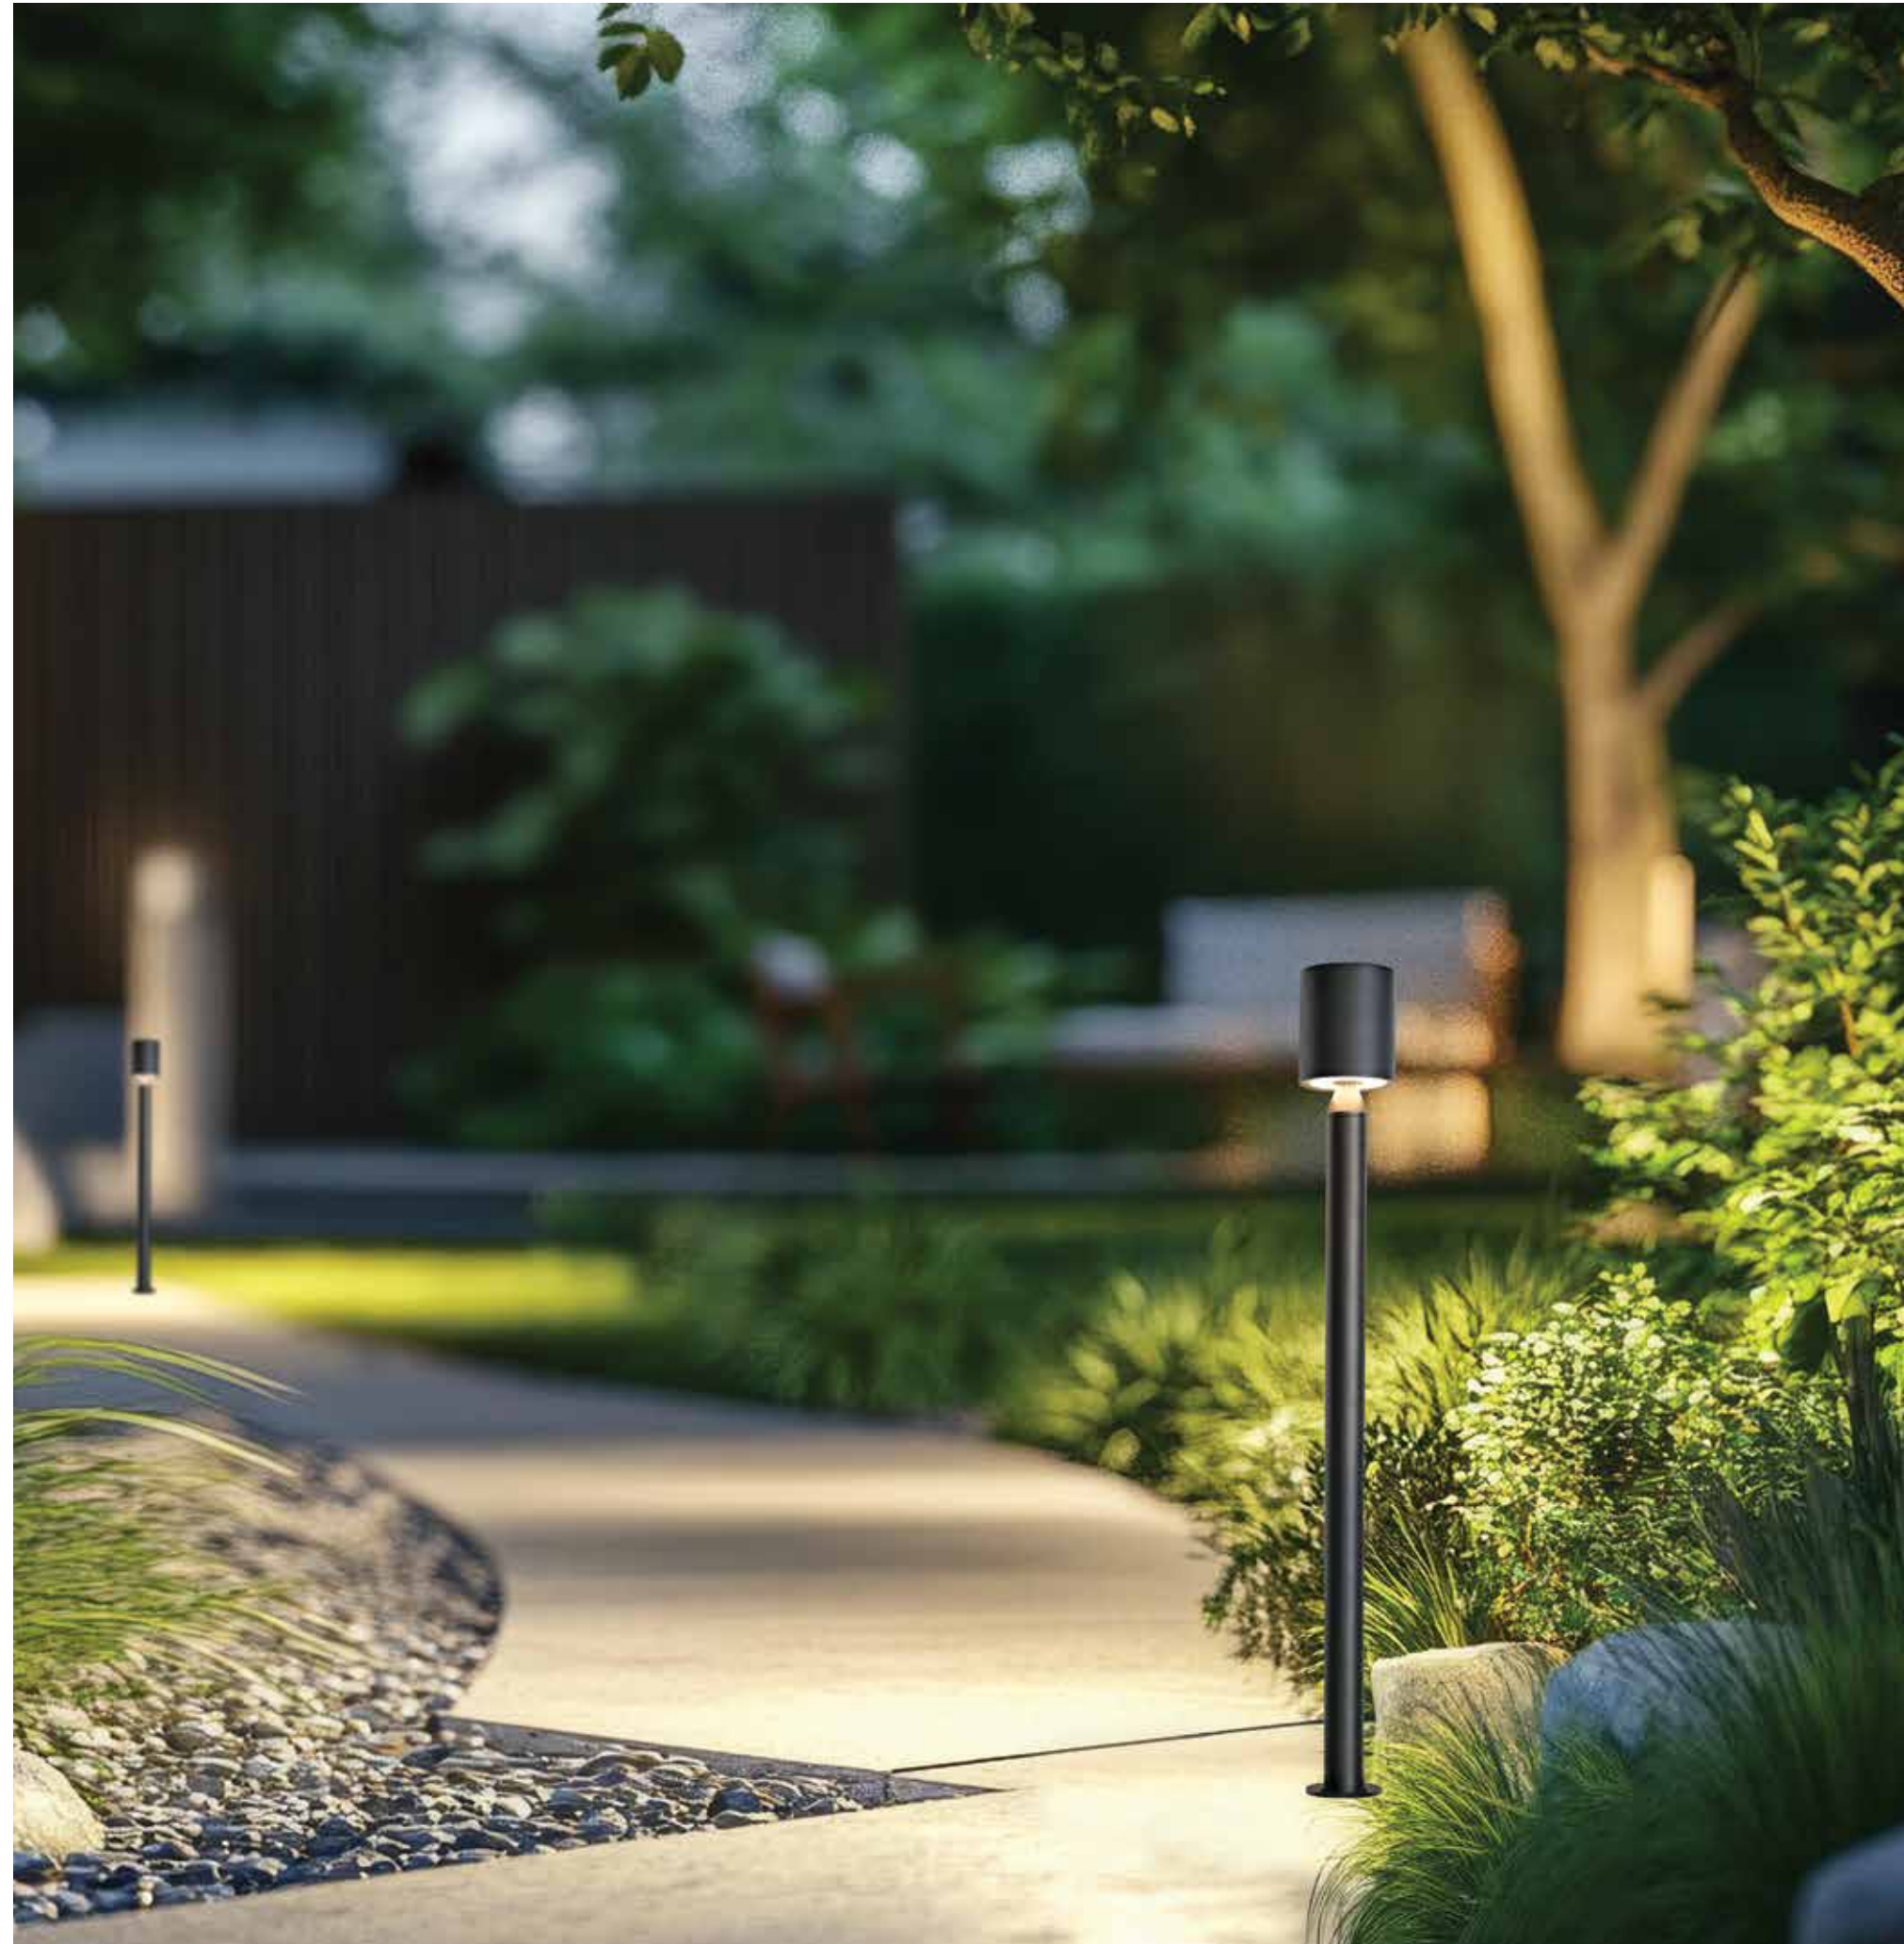

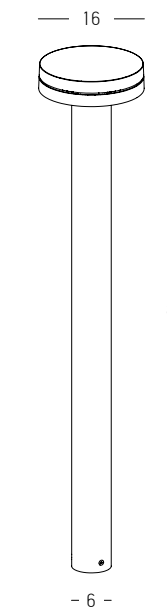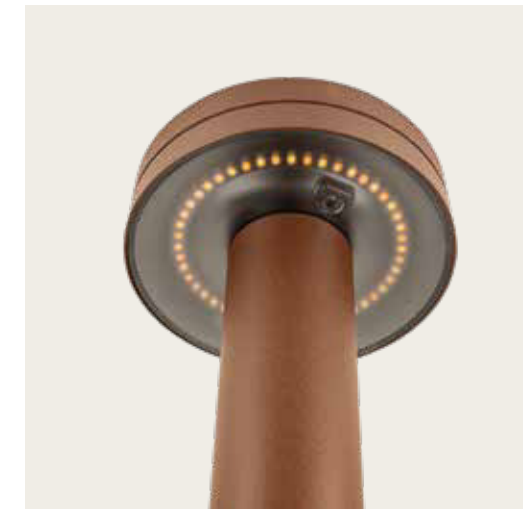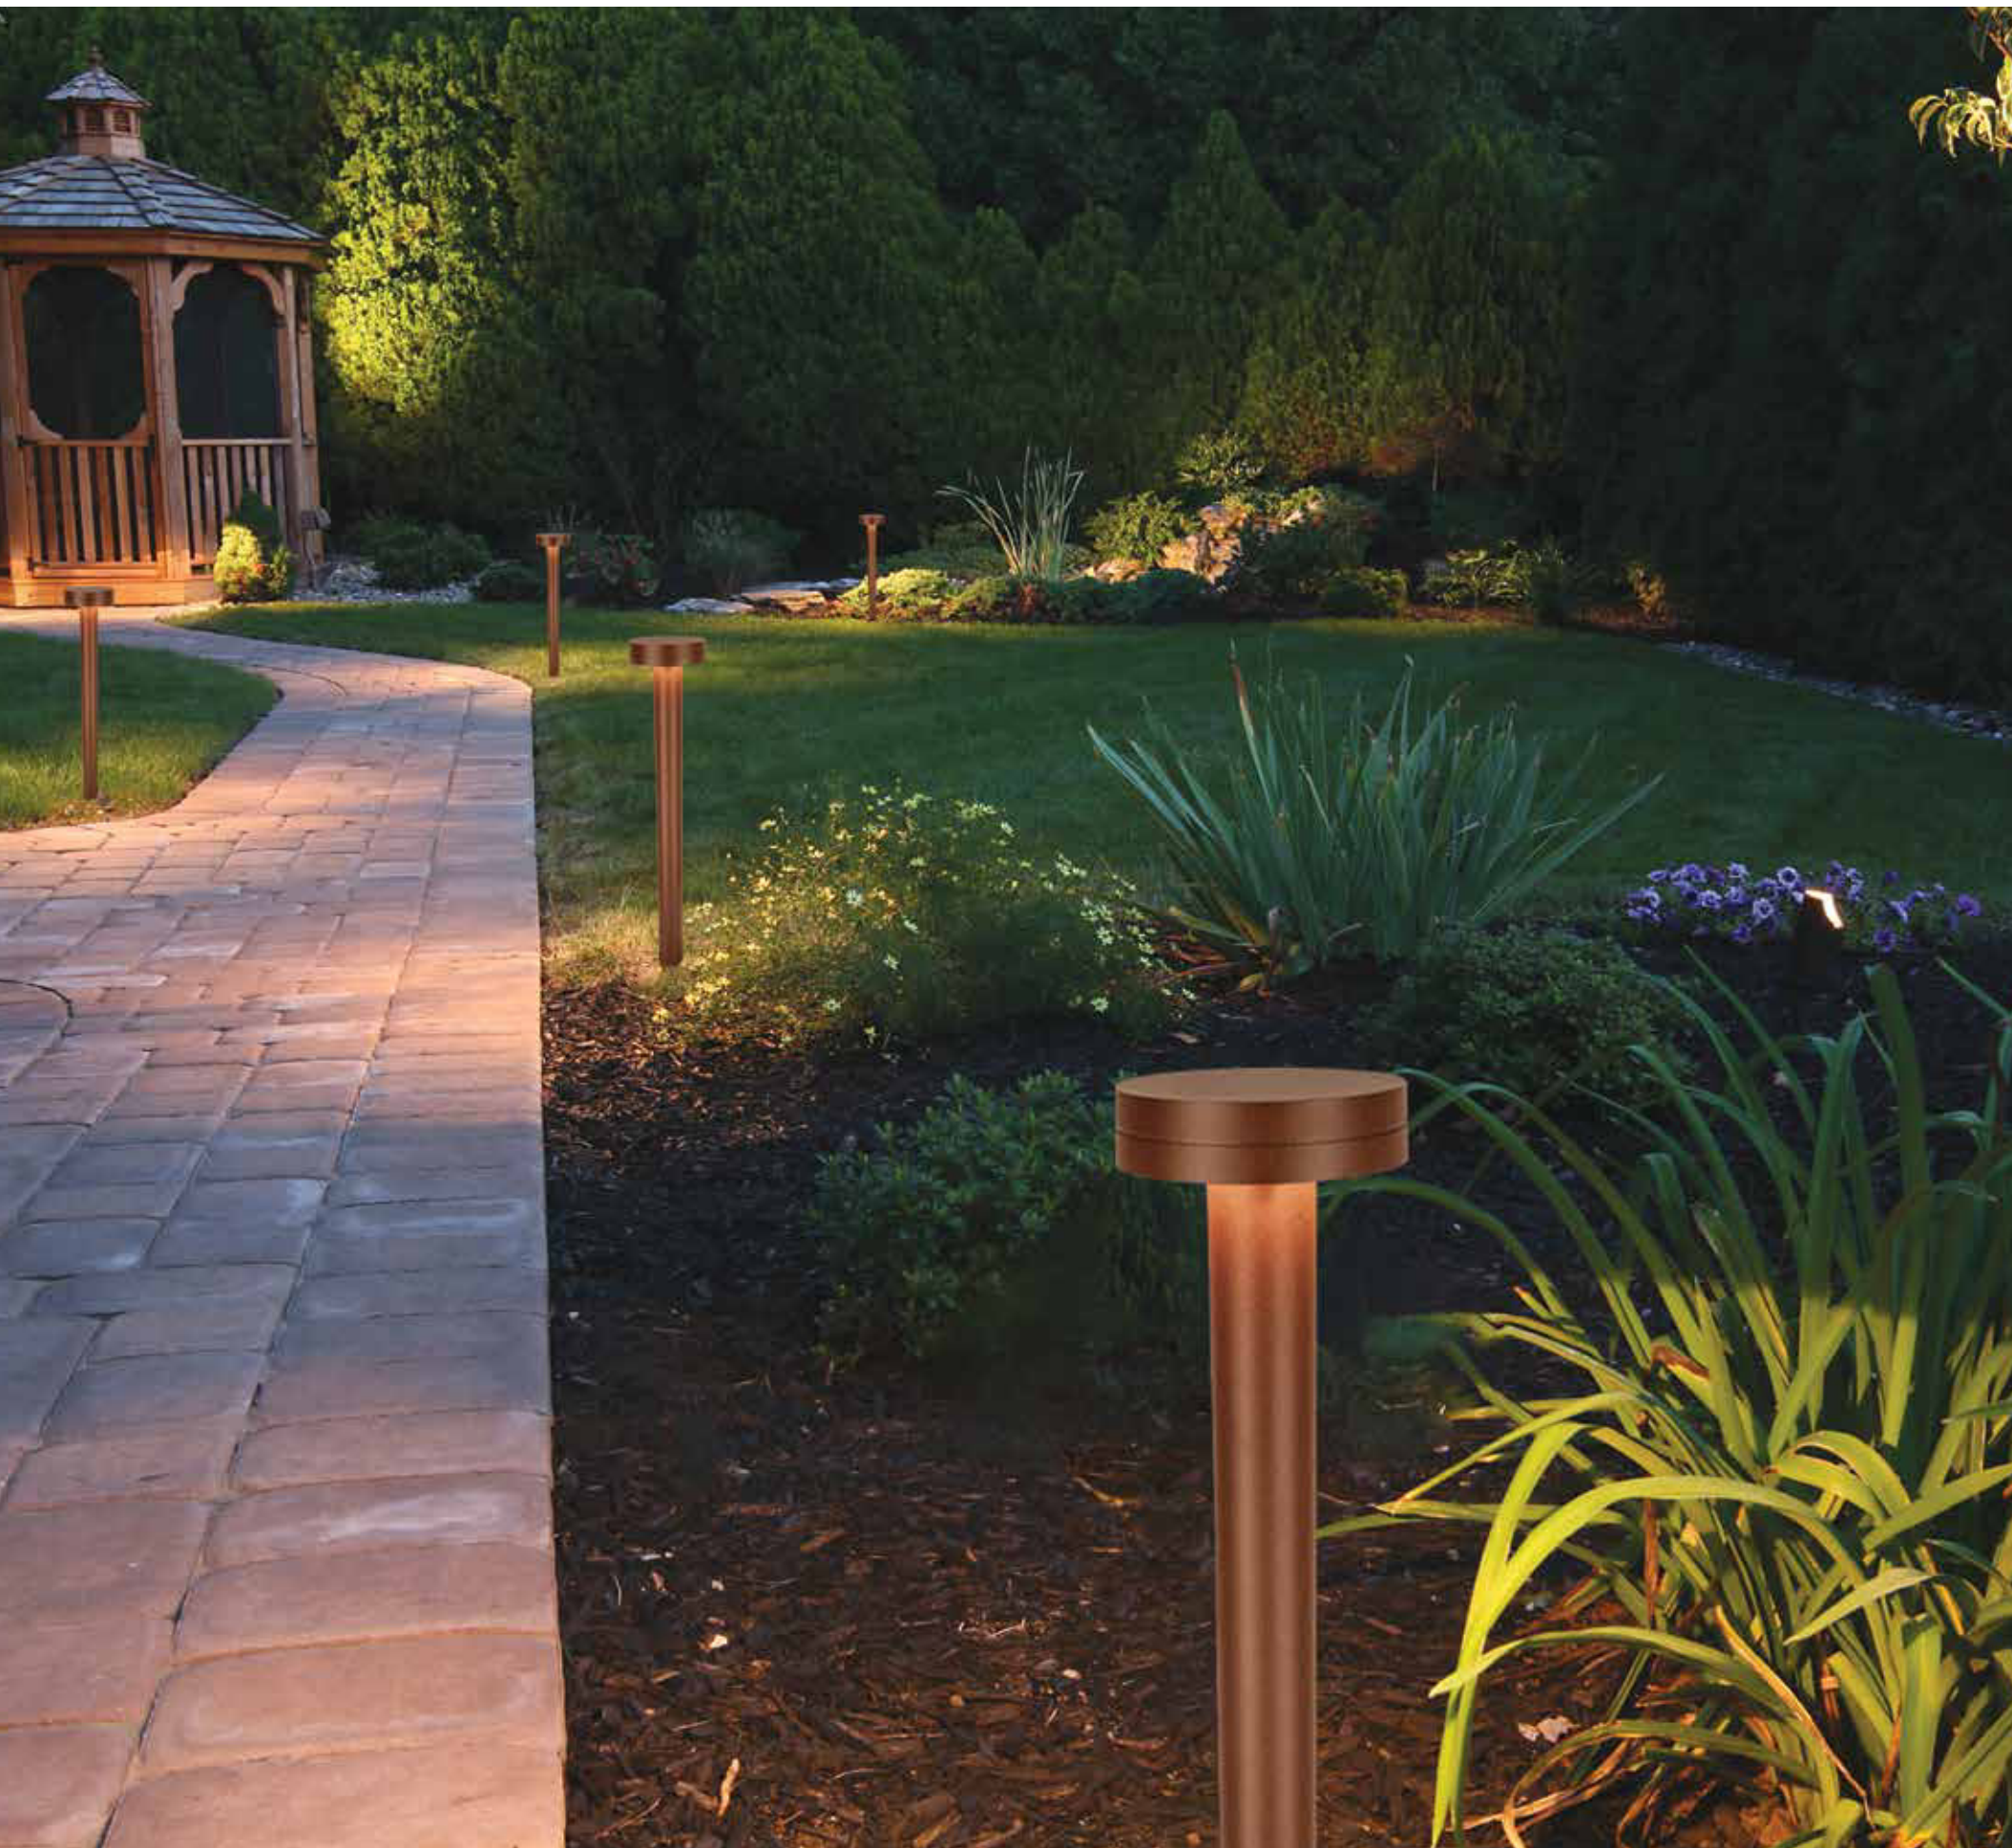


Power 12W
 Input 220-240V, 50/60Hz
 Color Temperature 2200K, 2700K, 3200K, 4000K
 Lumen 566Lm, 610Lm, 658Lm, 712Lm
 Cri 80
 IP 65
 Dimensions Ø: 16cm H: 80cm
 Material Aluminium - PC Diffuser
 Special Feature CCT Switch
 Color Dark Brown / **Code E466**



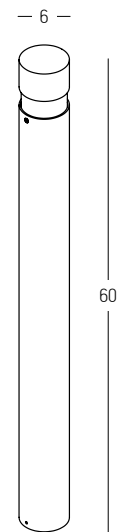


Power 8W
Input 220-240V, 50/60Hz
Color Temperature 3000K
Lumen 200Lm
Cri 95
IP 65
Dimensions Ø: 6cm H: 60cm
Material Aluminium - PC Diffuser
Color Dark Coffee / **Code E423**



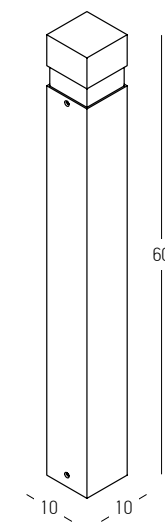


Power	15W
Input	220-240V, 50/60Hz
Color Temperature	3000K
Lumen	438Lm
Cri	95
IP	65
Dimensions	L: 10cm W: 10cm H: 60cm
Material	Aluminium - PC Diffuser
Color	Dark Coffee / Code E425



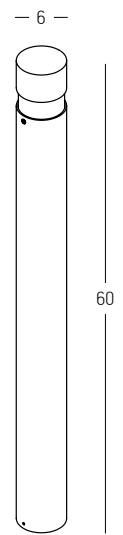

Power 8W
Input 220-240V, 50/60Hz
Color Temperature 3000K
Lumen 200Lm
Cri 95
IP 65
Dimensions Ø: 6cm H: 60cm
Material Aluminium - PC Diffuser
Color Graphite-Wood / **Code E424**




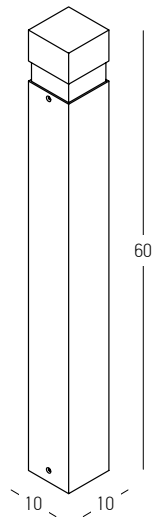


Power 15W
 Input 220-240V, 50/60Hz
 Color Temperature 3000K
 Lumen 438Lm
 Cri 95
 IP 65
 Dimensions L: 10cm W: 10cm H: 60cm
 Material Aluminium - PC Diffuser
 Color Graphite-Wood / Code E426






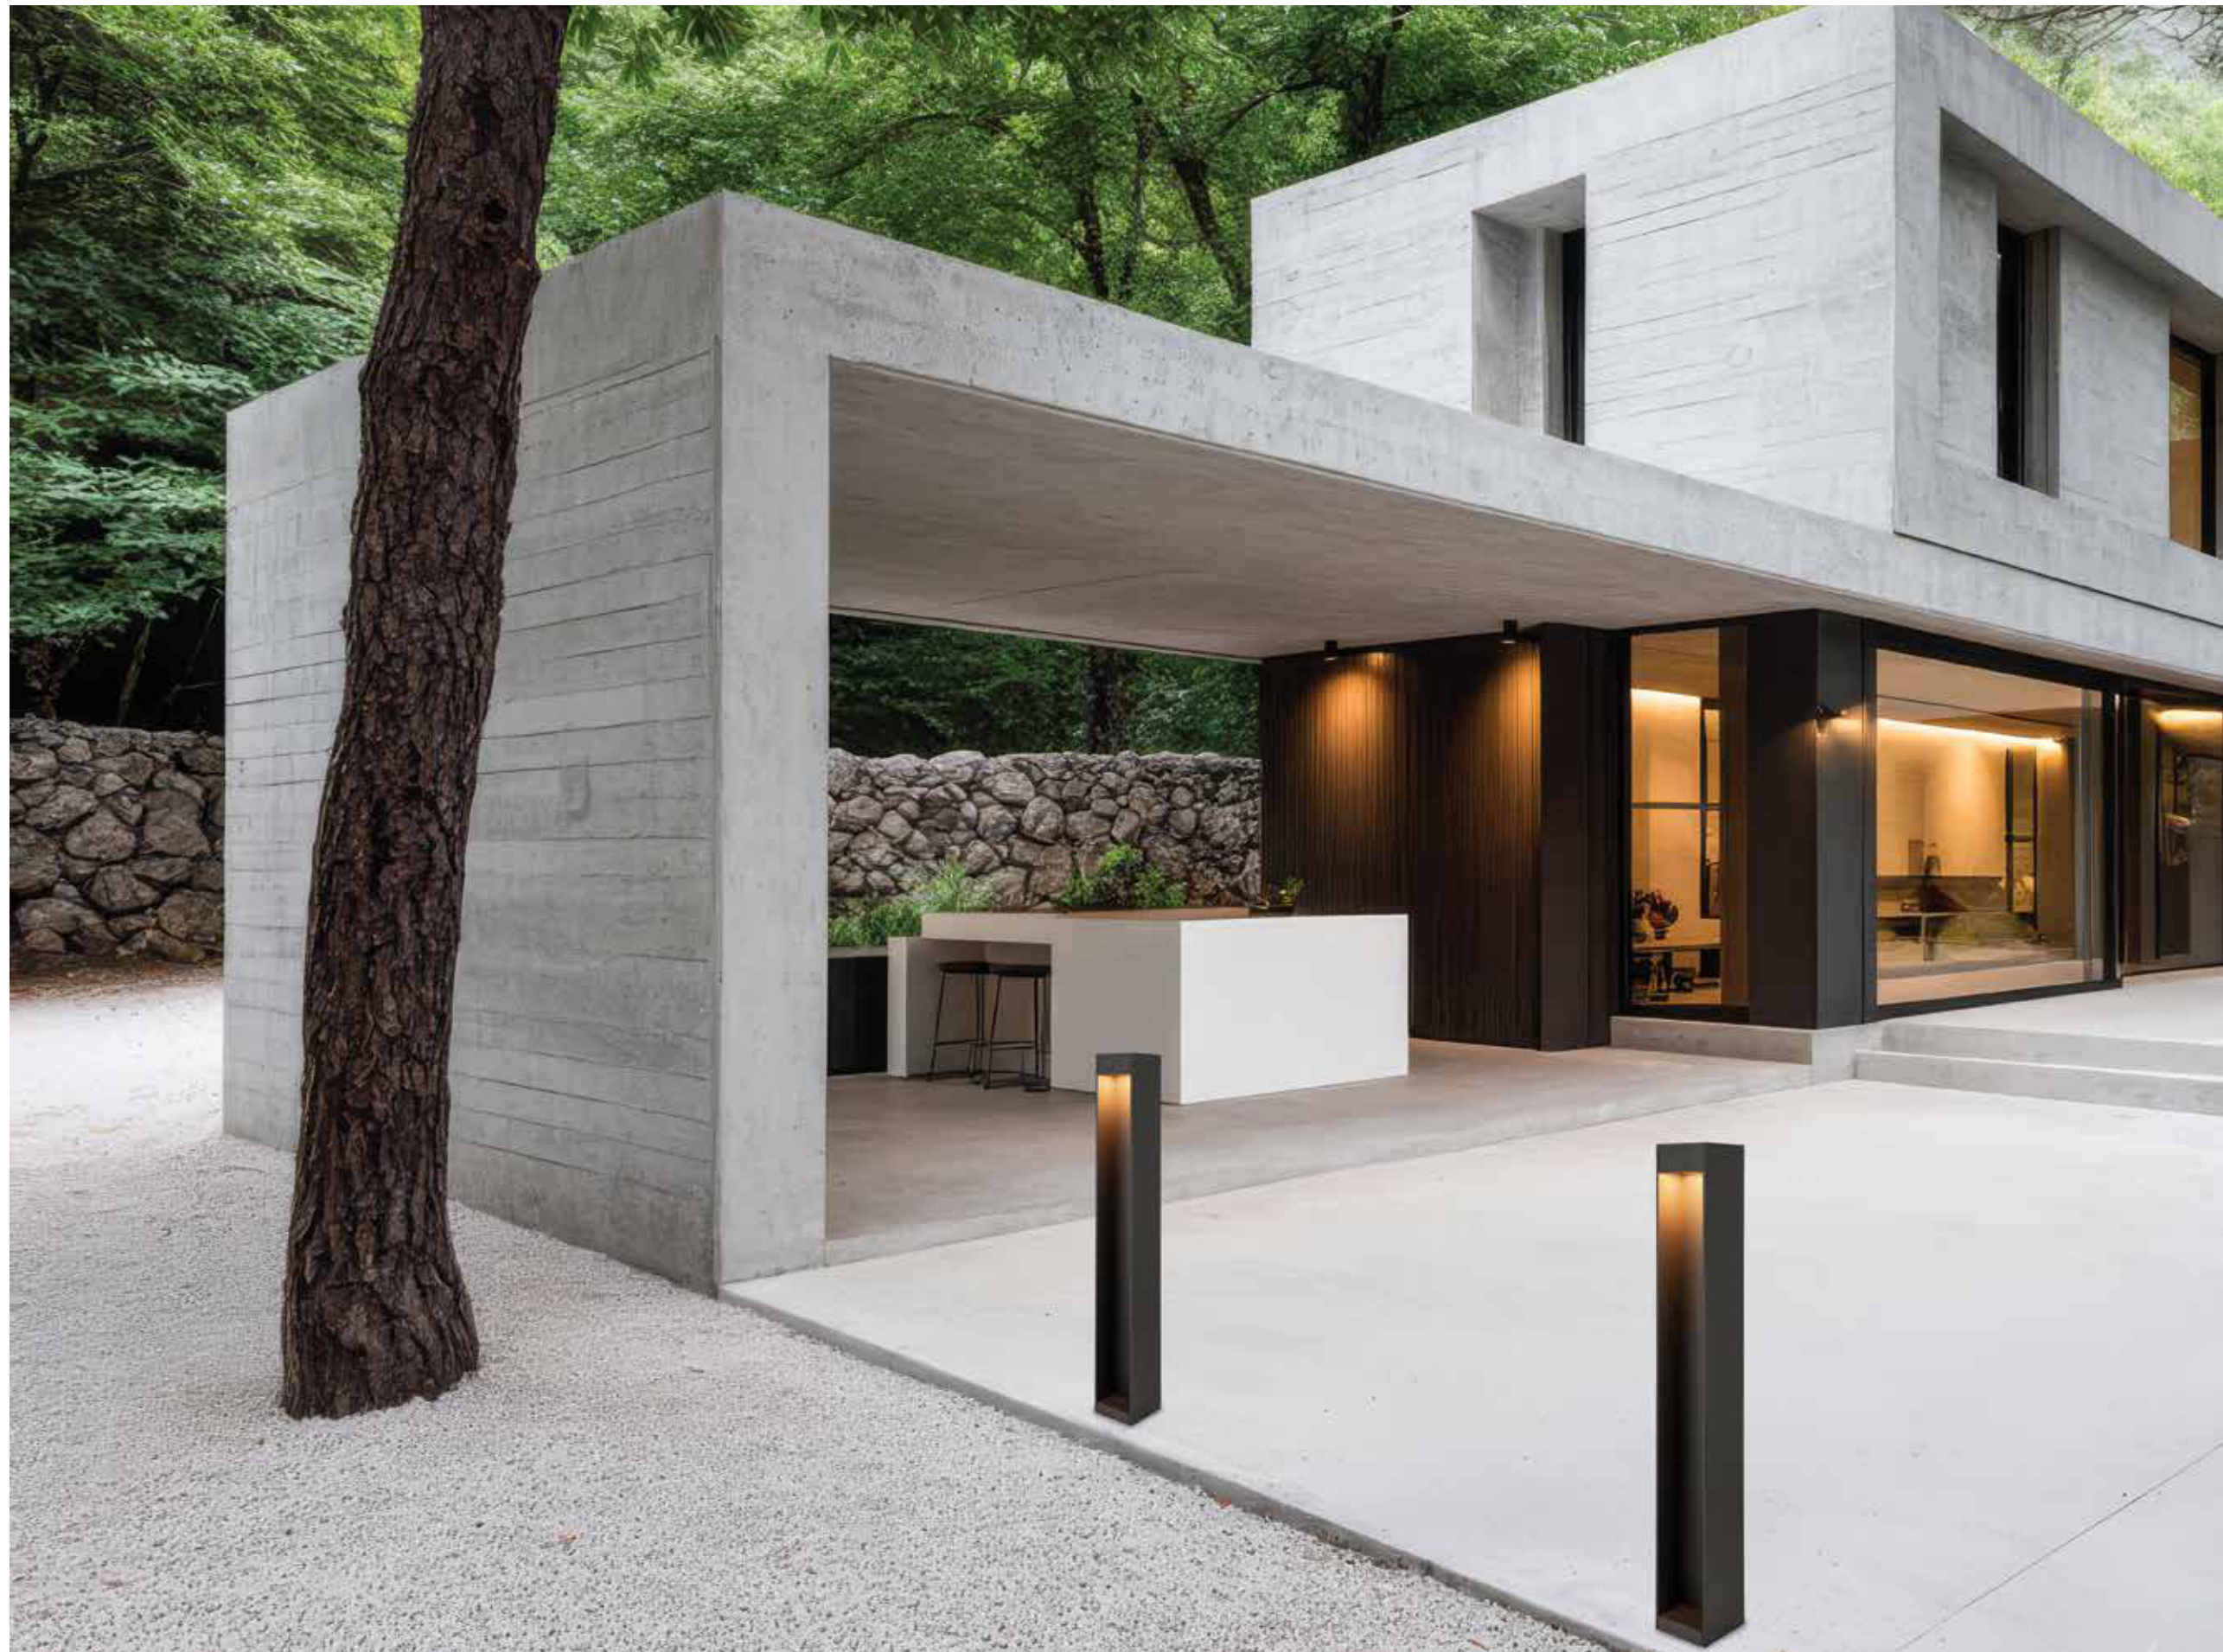



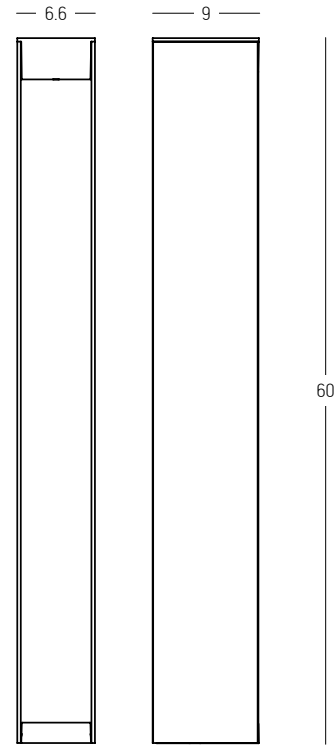
Power 12W
 Input 220-240V, 50/60Hz
 Color Temperature 2200K, 2700K, 3200K, 4000K
 Lumen 320Lm, 341Lm, 358Lm, 375Lm
 Cri 80
 IP 65
 Dimensions L: 9cm W: 6.6cm H: 60cm
 Material Aluminium - PC Diffuser
 Special Feature CCT Switch
 Color Graphite / **Code E467**



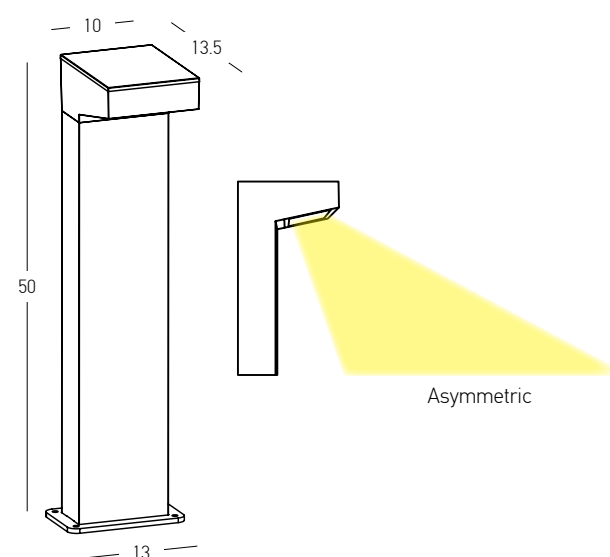


Power	12W
Input	220-240V, 50/60Hz
Color Temperature	3000K
Lumen	760Lm
Cri	85
IP	65
Dimensions	L: 13.5cm W: 10cm H: 50cm
Base	L: 8cm W: 13cm H: 0.5cm
Material	Aluminium - Tempered Glass
Special Feature	Asymmetric Beam Angle
Color	Graphite / Code E418

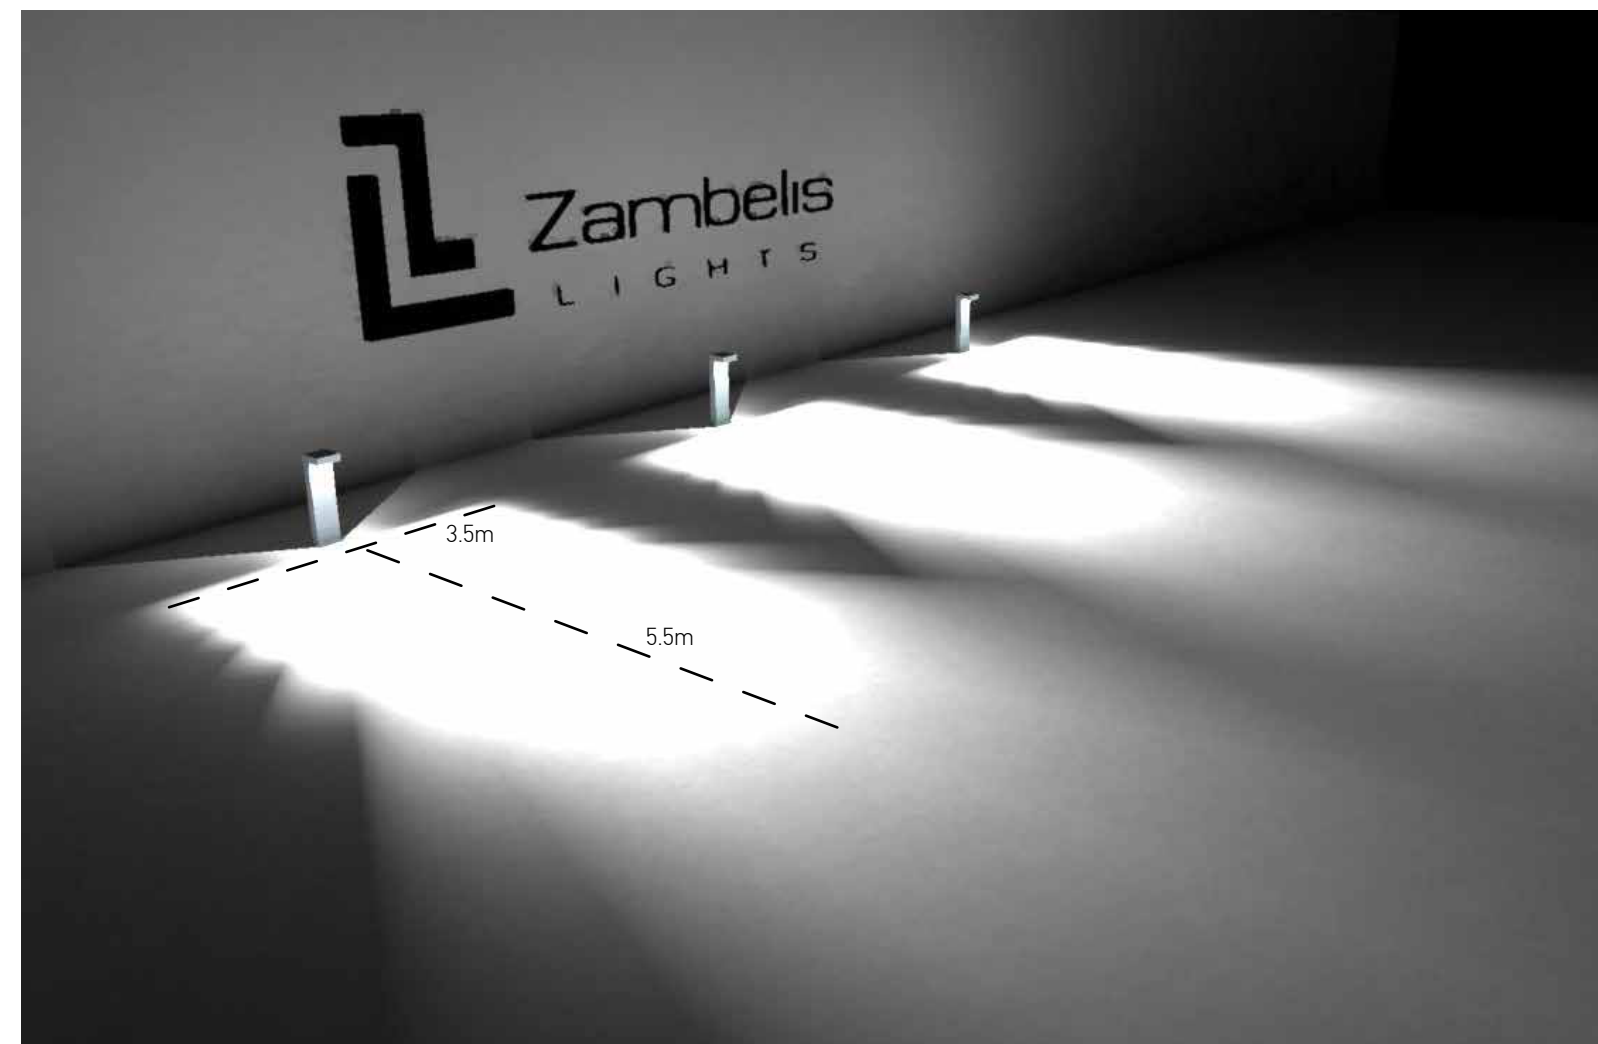

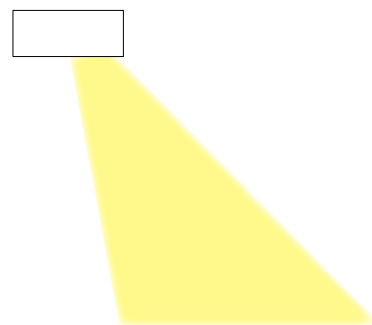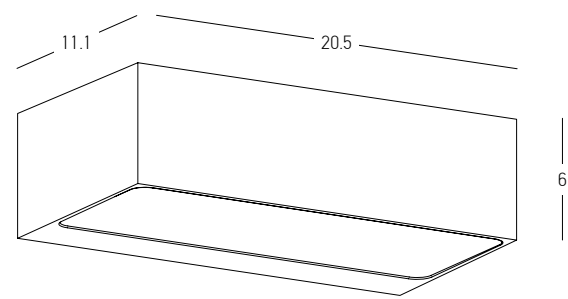

Asymmetric


Power	3x 4.5W
Input	220-240V, 50/60Hz
Color Temperature	3000K
Lumen	968Lm
Cri	85
IP	54
Dimensions	L: 11.1cm W: 20.5cm H: 6cm
Material	Aluminium - Tempered Glass
Special Feature	Asymmetric Beam Angle
Color	Graphite / Code E518

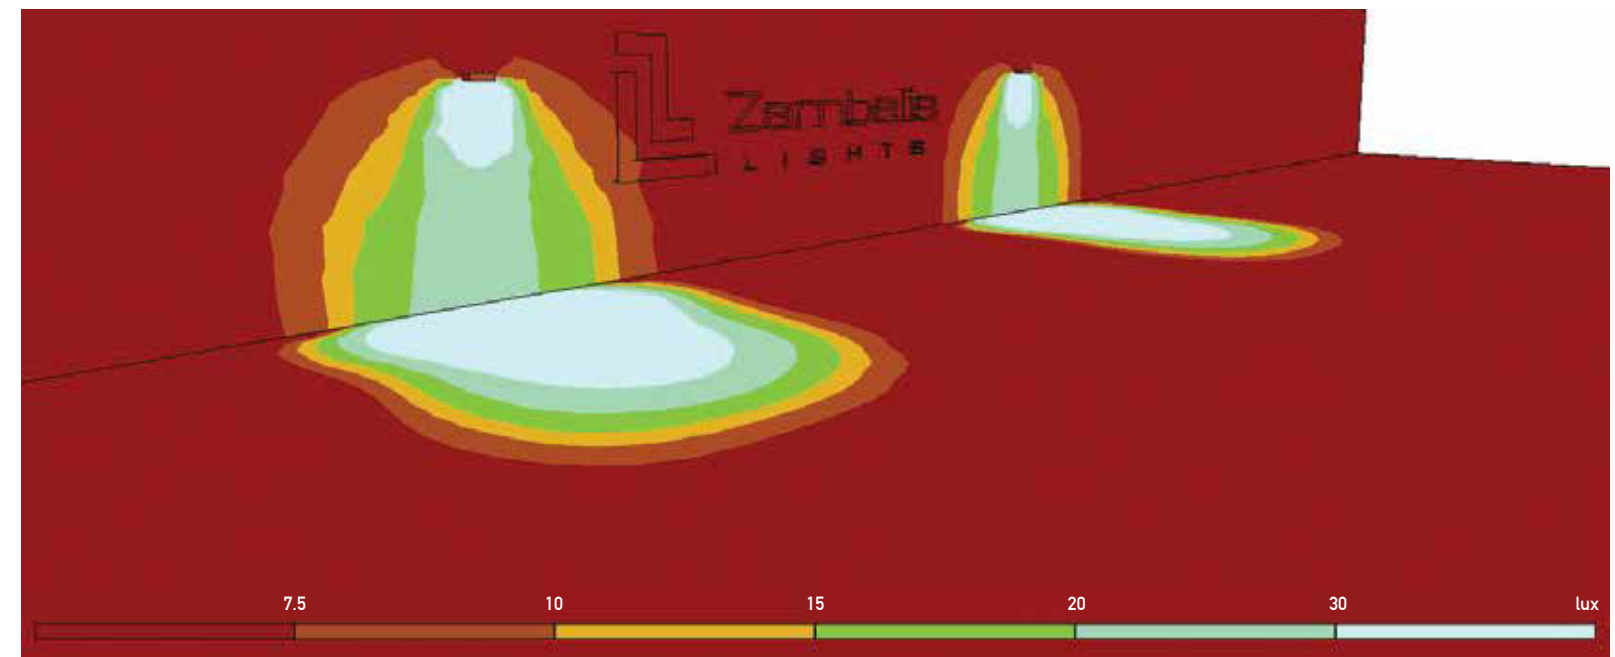




Power 9W
 Input 220-240V, 50/60Hz
 Color Temperature 3000K
 Lumen 710Lm
 Cri 80
 IP 54
 Dimensions L: 13.5cm W: 10cm H: 65cm
 Beam Angle 120°
 Material Aluminium - Tempered Glass
 Color Graphite / **Code E297**




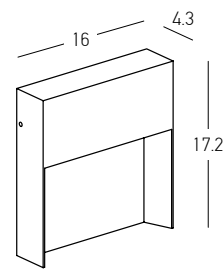


Power 6.5W
 Input 220-240V, 50/60Hz
 Color Temperature 3000K
 Lumen 316Lm
 Cri 80
 IP 65
 Dimensions L: 4.3m W: 16cm H: 17.2cm
 Material Aluminium - Glass
 Color Graphite / **Code E446**


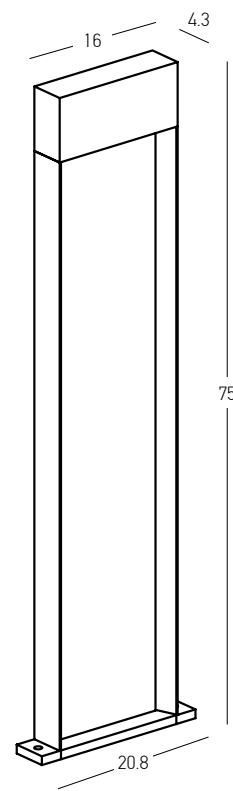


Power 6.5W
 Input 220-240V, 50/60Hz
 Color Temperature 3000K
 Lumen 316Lm
 Cri 80
 IP 65
 Dimensions L: 4.3m W: 16cm H: 75cm
 Base L: 4.3m W: 20.8cm H: 1cm
 Material Aluminium - Glass
 Color Graphite / **Code E447**

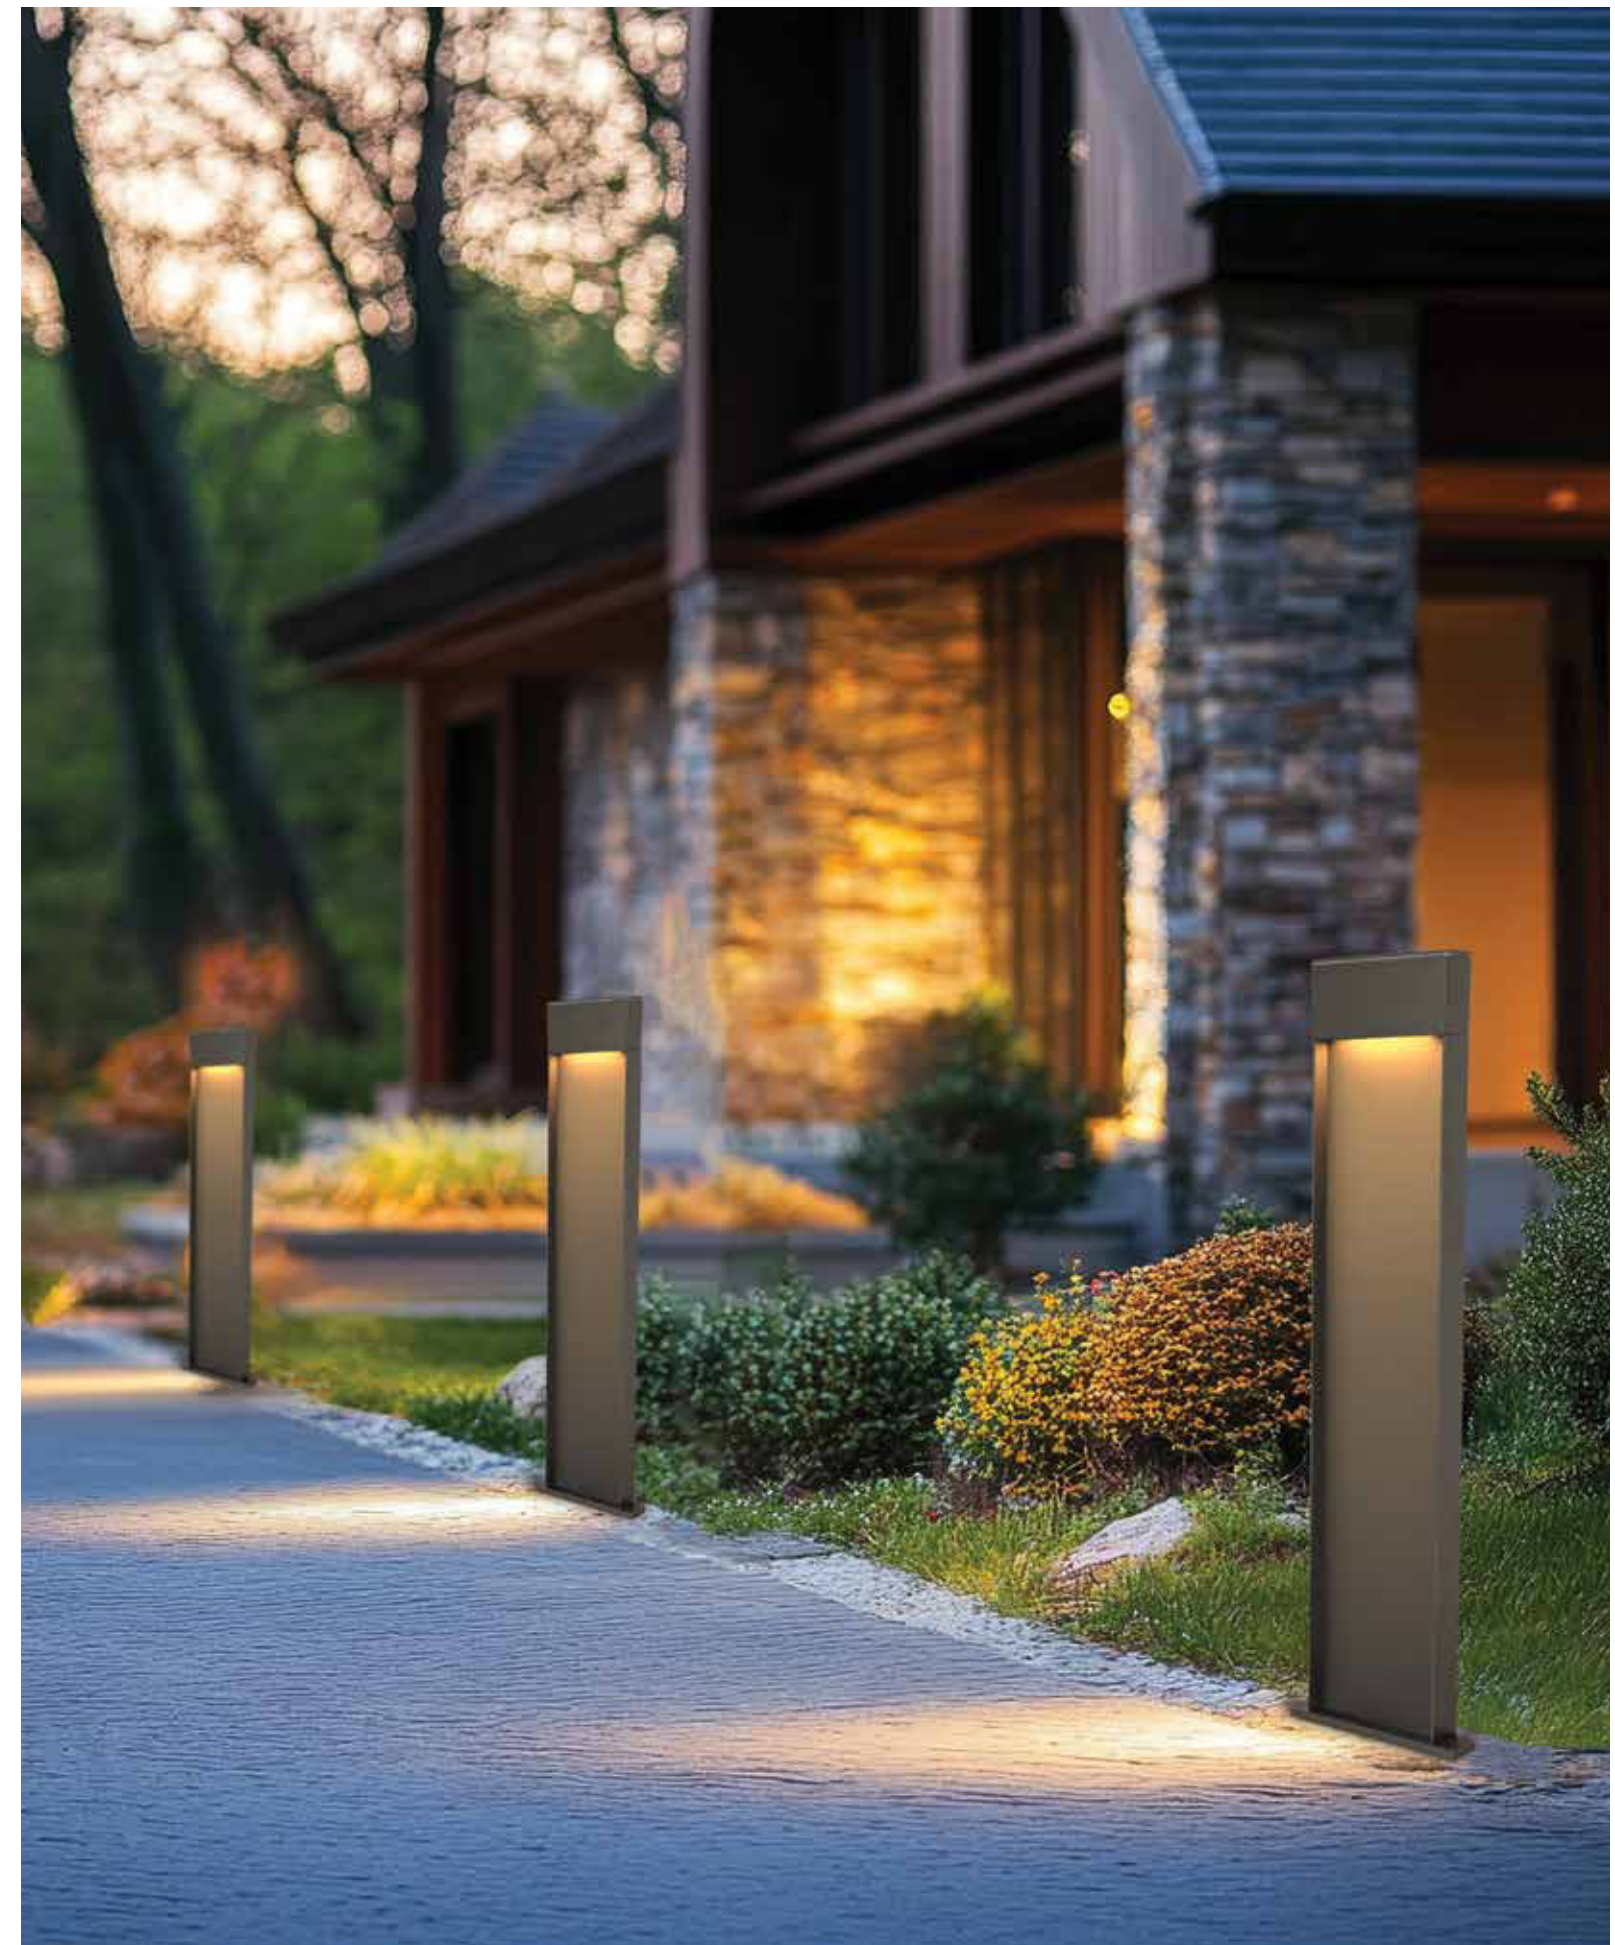

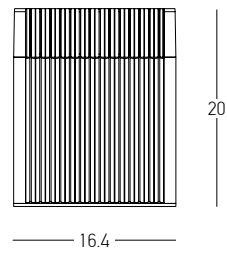


Power 13W
 Input 220-240V, 50/60Hz
 Color Temperature 3000K
 Lumen 638Lm
 Cri 80
 IP 65
 Dimensions L: 4.7cm W: 16.4cm H: 20cm
 Material Aluminium - Tempered Glass
 Color Graphite / **Code E353**

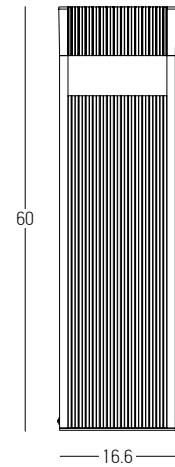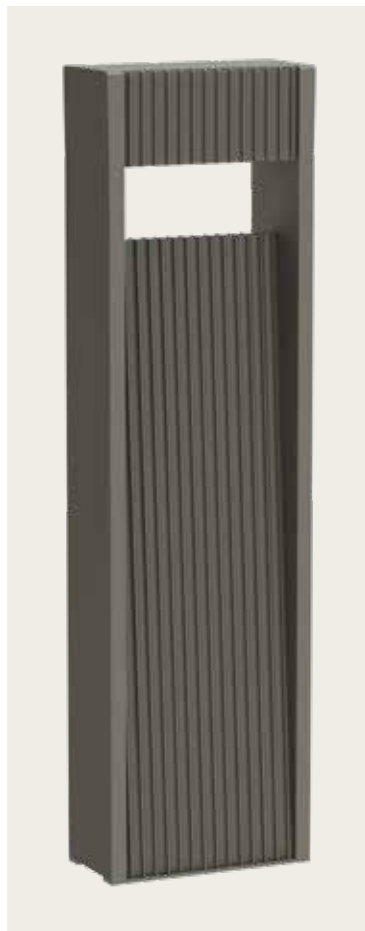


Power 30W
 Input 220-240V, 50/60Hz
 Color Temperature 3000K
 Lumen 986Lm
 Cri 80
 IP 65
 Dimensions L: 8m W: 16.6cm H: 60cm
 Material Aluminium - Tempered Glass
 Special Feature Double Sided Lighting
 Color Graphite / **Code E368**






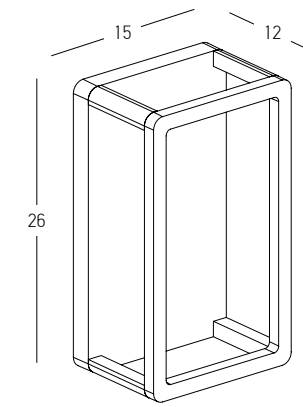

Power 8W
 Input 220-240V, 50/60Hz
 Color Temperature 3000K
 Lumen 481Lm
 Cri 80
 IP 65
 Dimensions L: 12cm W: 15cm H: 26cm
 Material Aluminium - PC Diffuser
 Color Graphite / **Code E336**


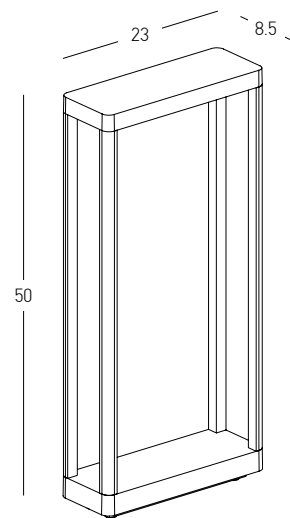


Power 8W
 Input 220-240V, 50/60Hz
 Color Temperature 3000K
 Lumen 587Lm
 Cri 80
 IP 65
 Dimensions L: 8.5cm W: 23cm H: 50cm
 Material Aluminium - Clear Glass
 Color Graphite / **Code E335**

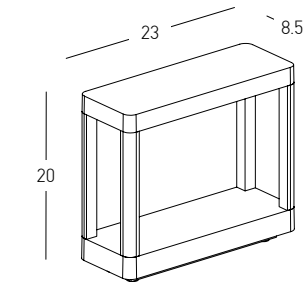


Power 8W
 Input 220-240V, 50/60Hz
 Color Temperature 3000K
 Lumen 587Lm
 Cri 80
 IP 65
 Dimensions L: 8.5cm W: 23cm H: 20cm
 Material Aluminium - Clear Glass
 Color Graphite / **Code E334**



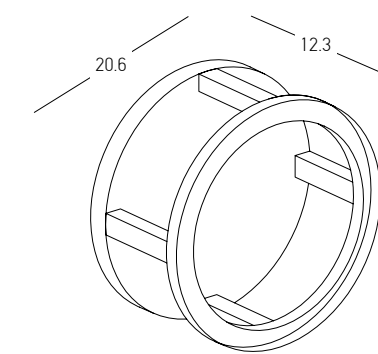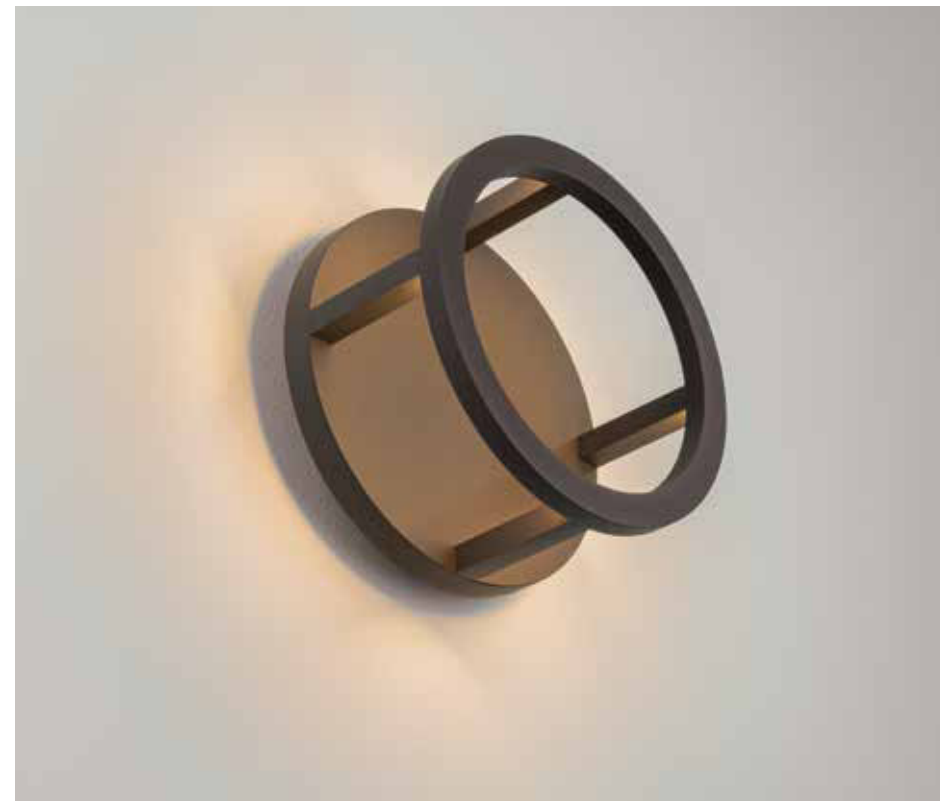



Power	9.2W
Input	220-240V, 50/60Hz
Color Temperature	3000K
Lumen	368Lm
Cri	85
IP	65
Dimensions	Ø: 20.6cm L: 12.3cm
Material	Aluminium - PC Diffuser
Color	Graphite / Code E443




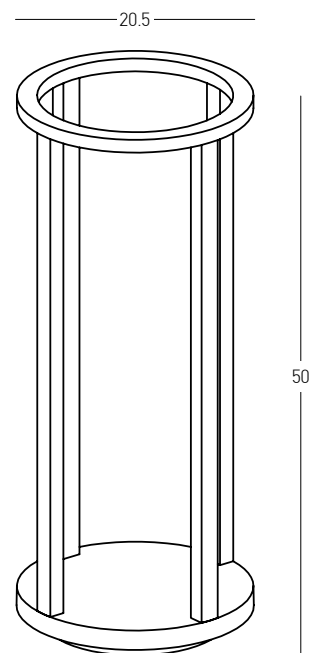


Power 9.2W
Input 220-240V, 50/60Hz
Color Temperature 3000K
Lumen 450Lm
Cri 85
IP 65
Dimensions Ø: 20.5cm H: 50cm
Material Aluminium - PC Diffuser
Color Graphite / **Code E444**

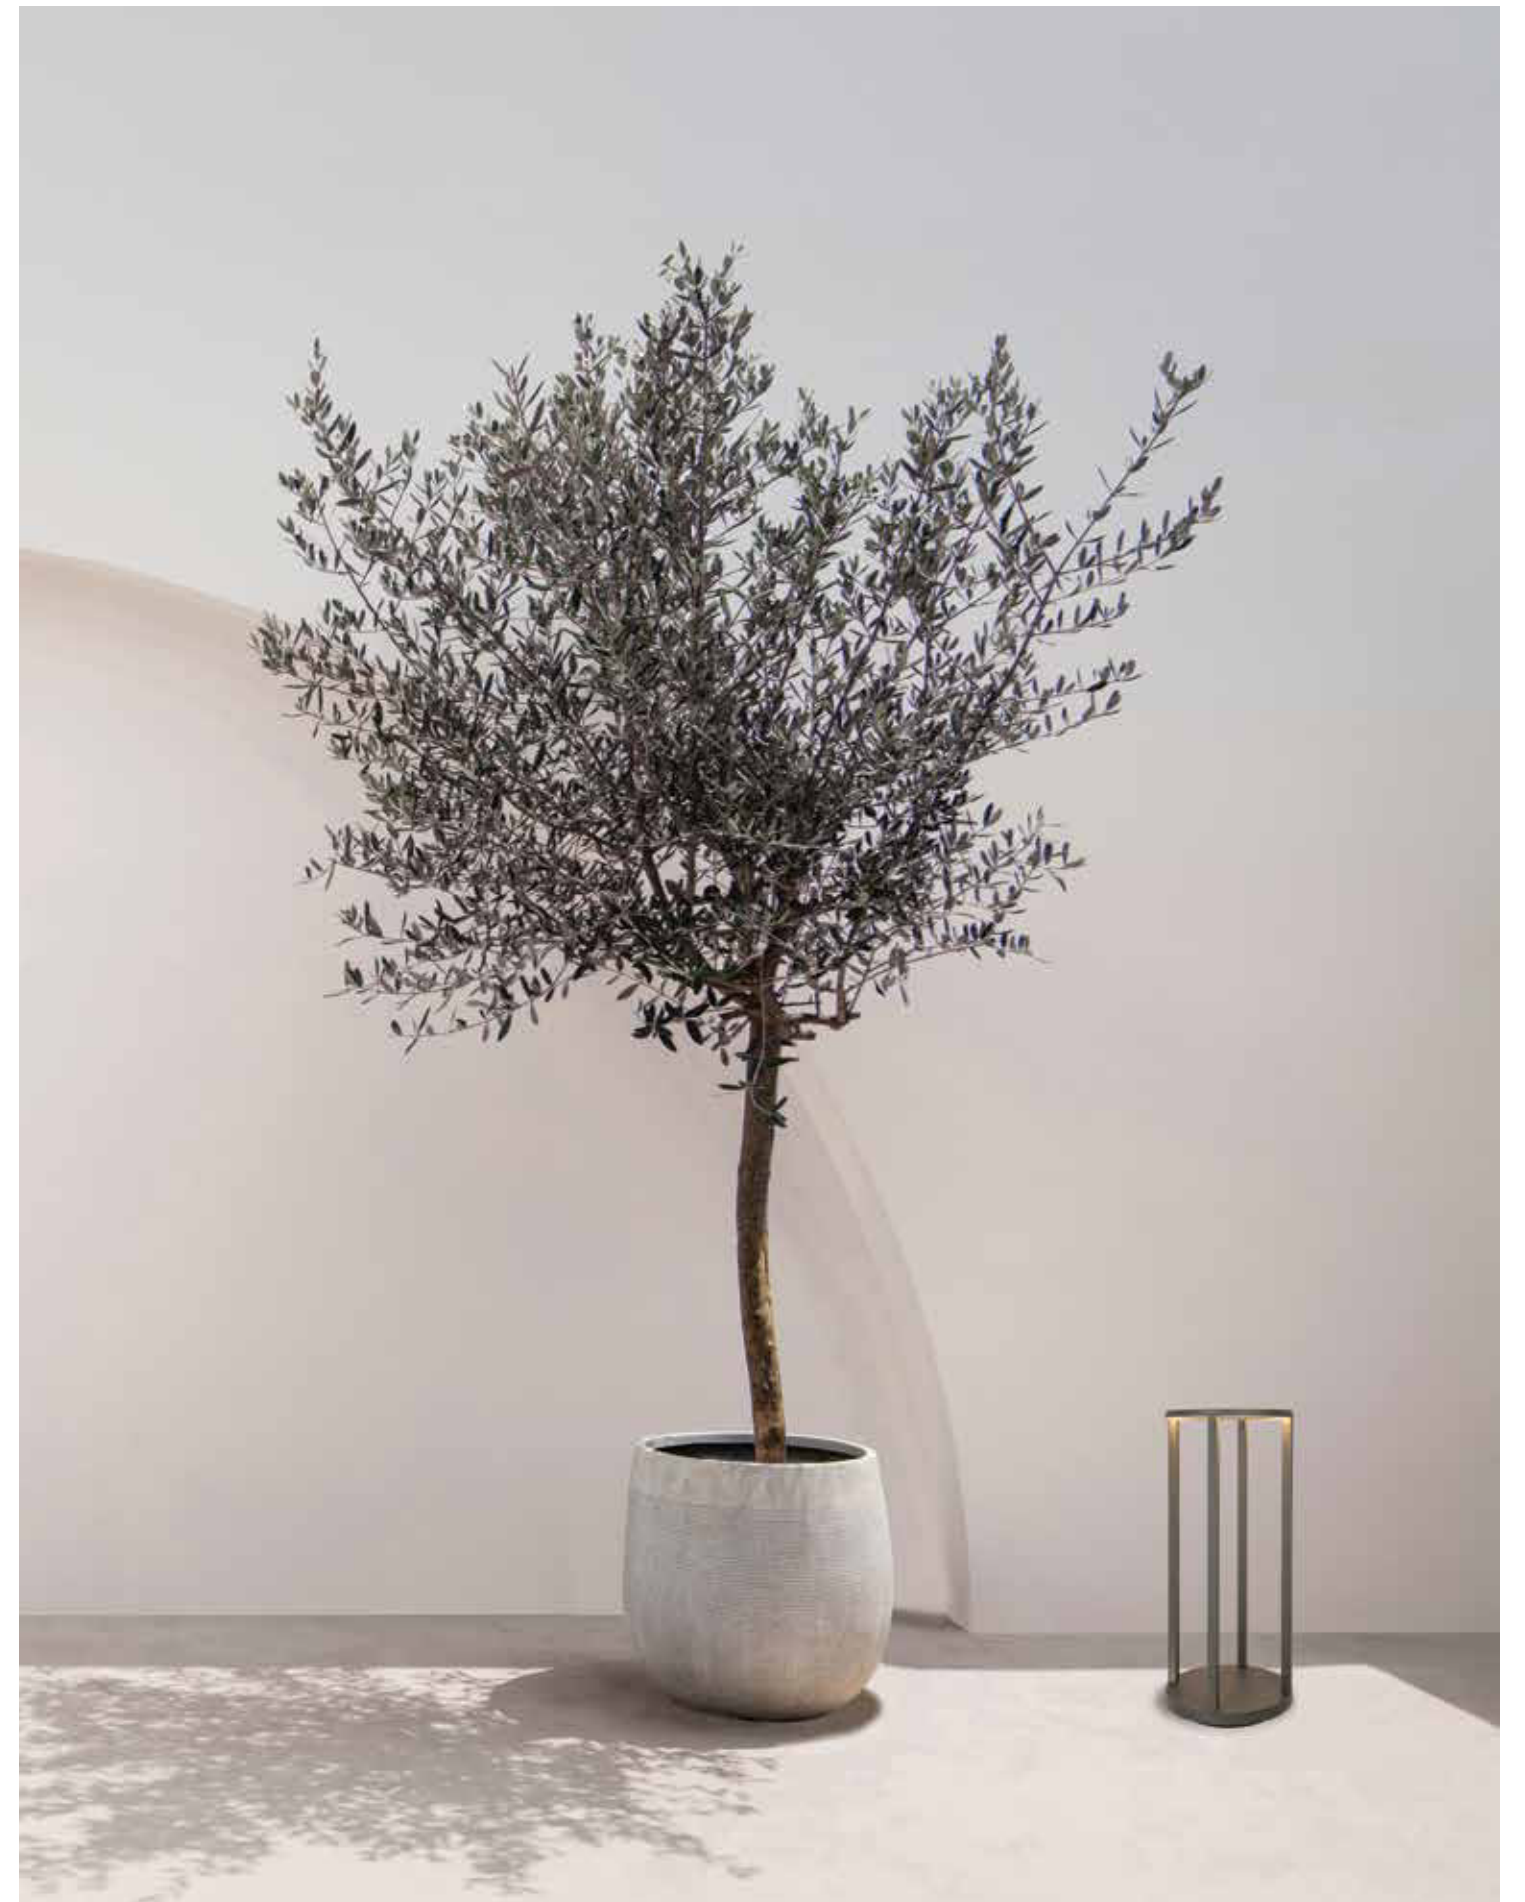





Power 9W
 Input 220-240V, 50/60Hz
 Color Temperature 3000K
 Lumen 704Lm
 Cri 80
 IP 54
 Dimensions L: 18cm W: 18cm H: 23cm
 Material Aluminium - Tempered Glass
 Color Graphite / **Code E203**

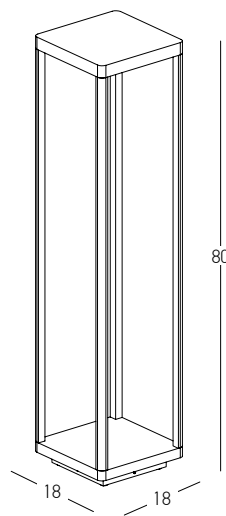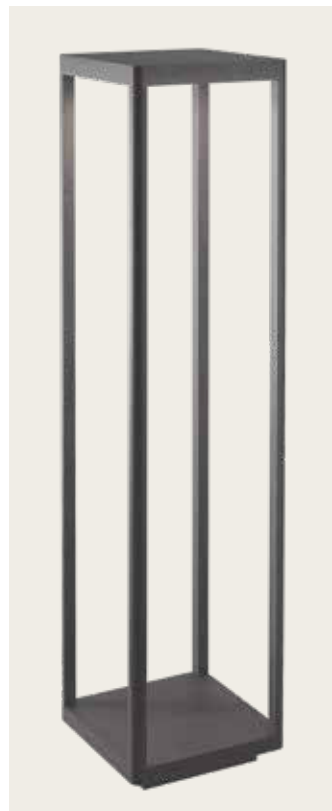

Power 9W
 Input 220-240V, 50/60Hz
 Color Temperature 3000K
 Lumen 704Lm
 Cri 80
 IP 54
 Dimensions L: 18cm W: 18cm H: 80cm
 Material Aluminium - Tempered Glass
 Color Graphite / **Code E204**

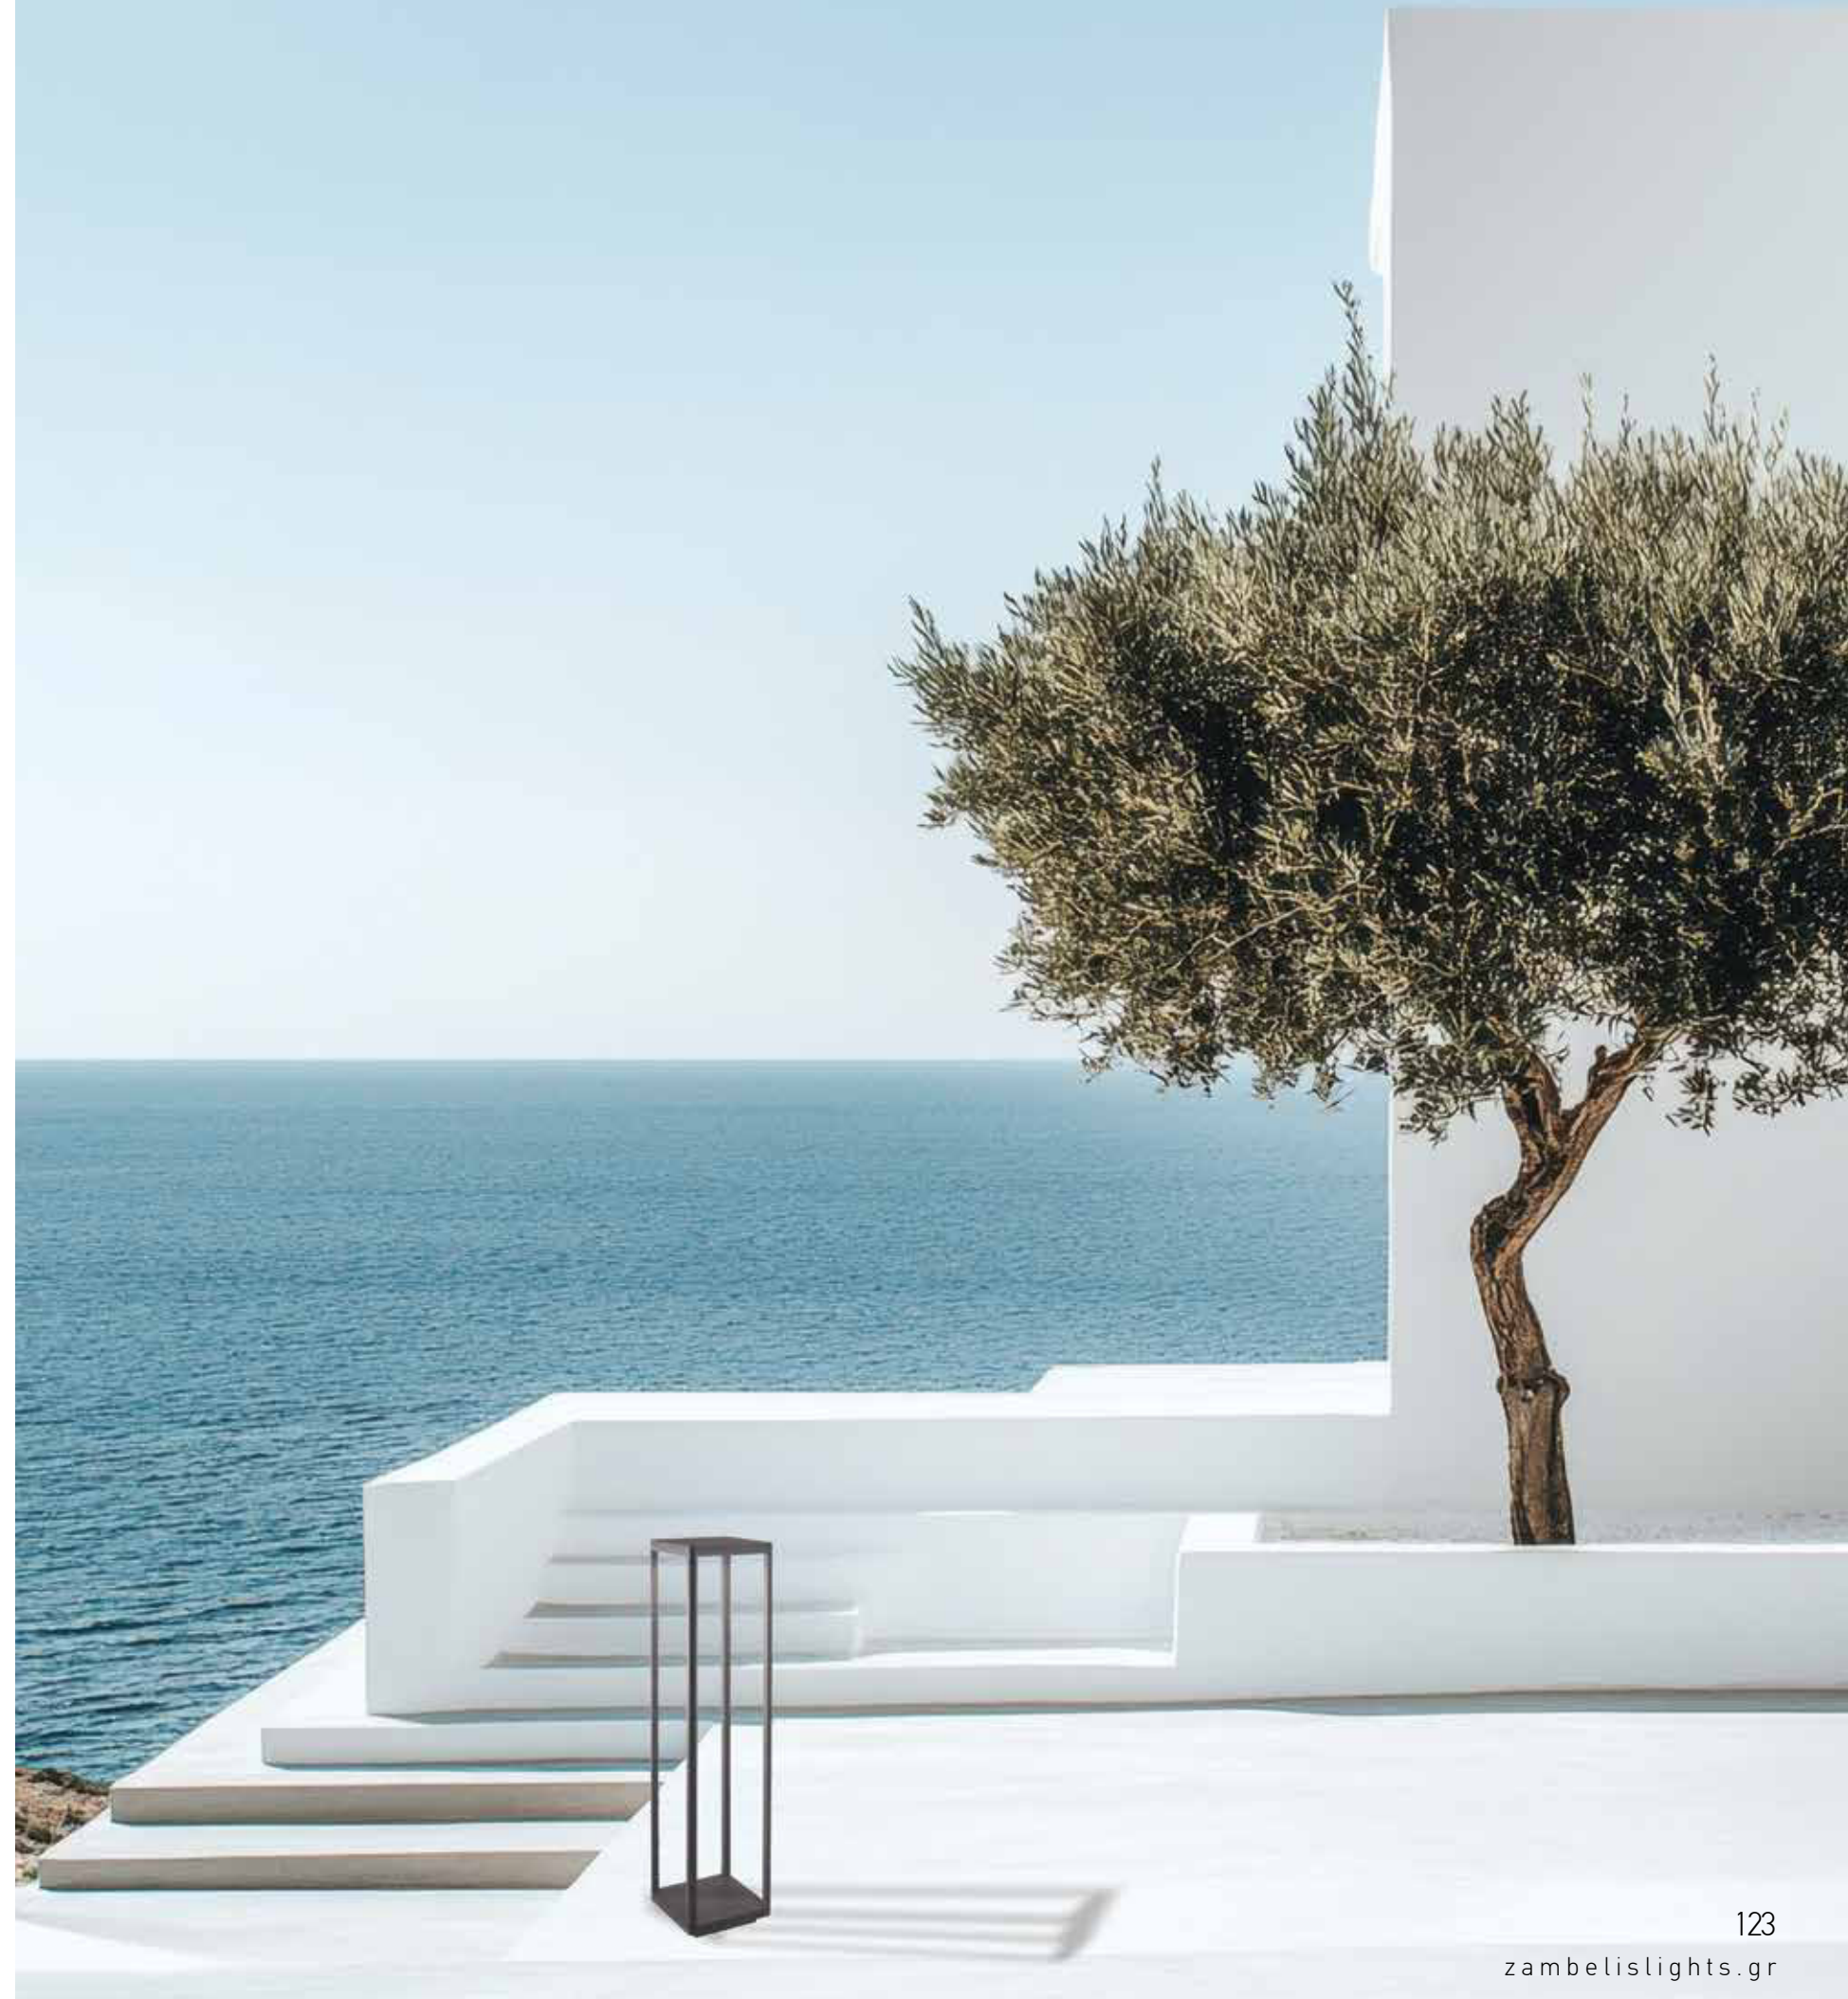

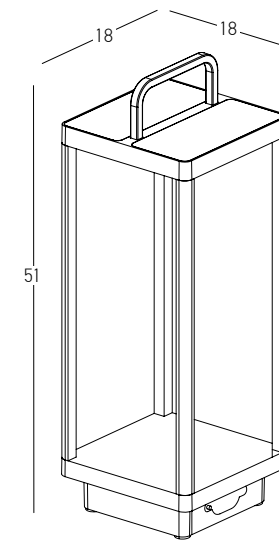

Power	3W
Input	220-240V, 50/60Hz
Color Temperature	3000K
Lumen	390Lm
Cri	80
IP	54
Dimensions	L: 18cm W: 18cm H: 51
Switch	1 Switch On/Off
Material	Aluminium - Tempered Glass
Special Feature	Solar Panel Portable Lamp USB Cable Included
Color	Graphite / Code E302




LIGHTING MODES OVERVIEW

Charging Instructions:


Before first use, charge the lamp under direct sunlight for 3 full days or use the included USB cable with a 1A adaptor for 4-5 hours. (USB cable included in the package.)

Lighting Modes:

- Mode 1: First press • 100% brightness**
- Mode 2: Second press • 50% brightness**
- Mode 3: Third press • Light OFF**

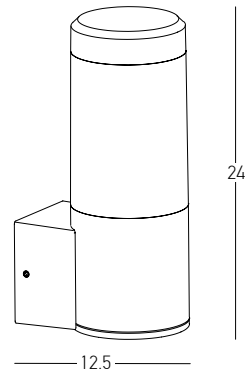


Power 10W
 Input 220-240V, 50/60Hz
 Color Temperature 3000K
 Lumen 990Lm
 Cri 80
 IP 54
 Dimensions L: 12.5cm W: 9cm H: 24cm
 Material Aluminium - PC Diffuser
 Color Graphite / **Code E276**

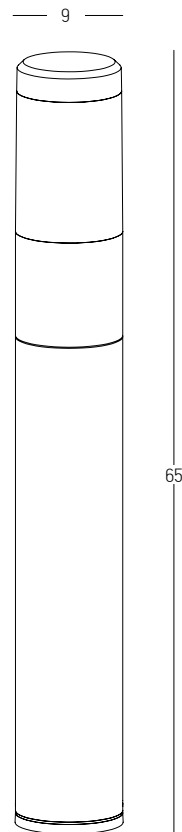


Power 10W
 Input 220-240V, 50/60Hz
 Color Temperature 3000K
 Lumen 993Lm
 Cri 80
 IP 54
 Dimensions Ø: 9cm H: 65cm
 Material Aluminium - PC Diffuser
 Color Graphite / **Code E277**



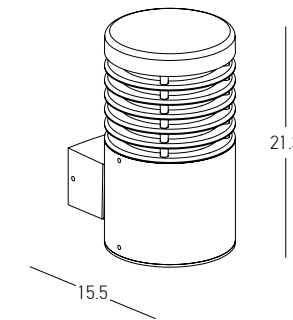


Power 10W
 Input 220-240V, 50/60Hz
 Color Temperature 3000K
 Lumen 919Lm
 Cri 80
 IP 65
 Dimensions Ø: 12cm L: 15.5cm H: 21.3cm
 Material Aluminium - PC Diffuser
 Color Graphite / **Code E344**

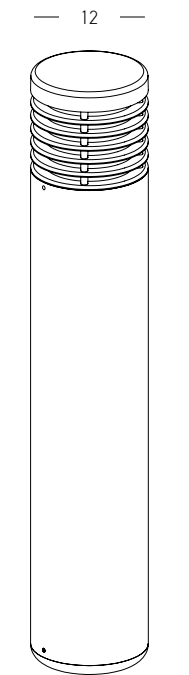

Power 10W
 Input 220-240V, 50/60Hz
 Color Temperature 3000K
 Lumen 923Lm
 Cri 80
 IP 65
 Dimensions Ø: 12cm H: 50cm
 Material Aluminium - PC Diffuser
 Color Graphite / **Code E345**



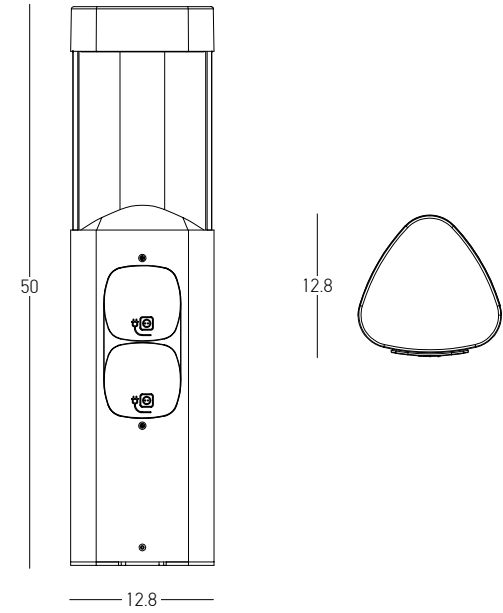


Power	7W
Input	220-240V, 50/60Hz
Color Temperature	3000K
Lumen	639Lm
Cri	80
IP	54
Dimensions	L: 12.8cm W: 12.8cm H: 50cm
Material	Aluminium - PC Diffuser
Special Feature	2 European Sockets 220-240V
Color	Graphite / Code E354





*Power sockets operate only when the light is switched on.



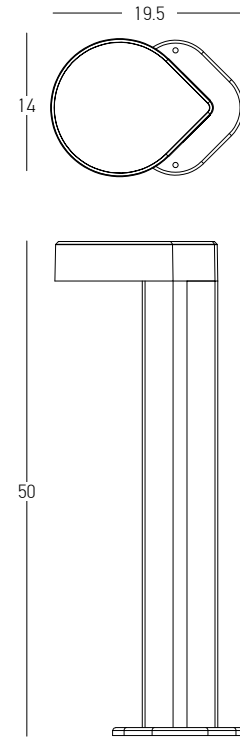



Power 13W
 Input 220-240V, 50/60Hz
 Color Temperature 3000K
 Lumen 1035Lm
 Cri 80
 IP 65
 Dimensions L: 19.5cm W: 14cm H: 50cm
 Beam Angle 120°
 Material Aluminium - PC Diffuser
 Color Graphite / **Code E357**



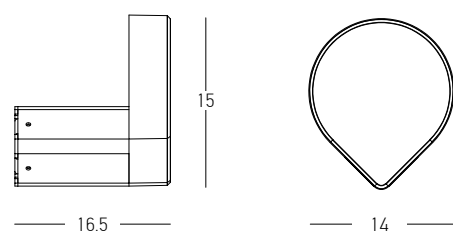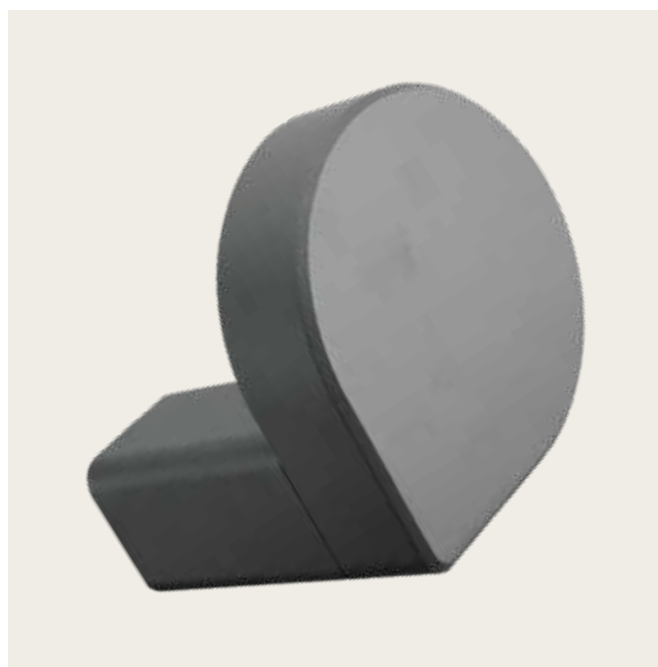


Power 13W
Input 220-240V, 50/60Hz
Color Temperature 3000K
Lumen 1035Lm
Cri 80
IP 65
Dimensions L: 16.5cm W: 14cm H: 15cm
Beam Angle 120°
Material Aluminium - PC Diffuser
Color Graphite / **Code E358**

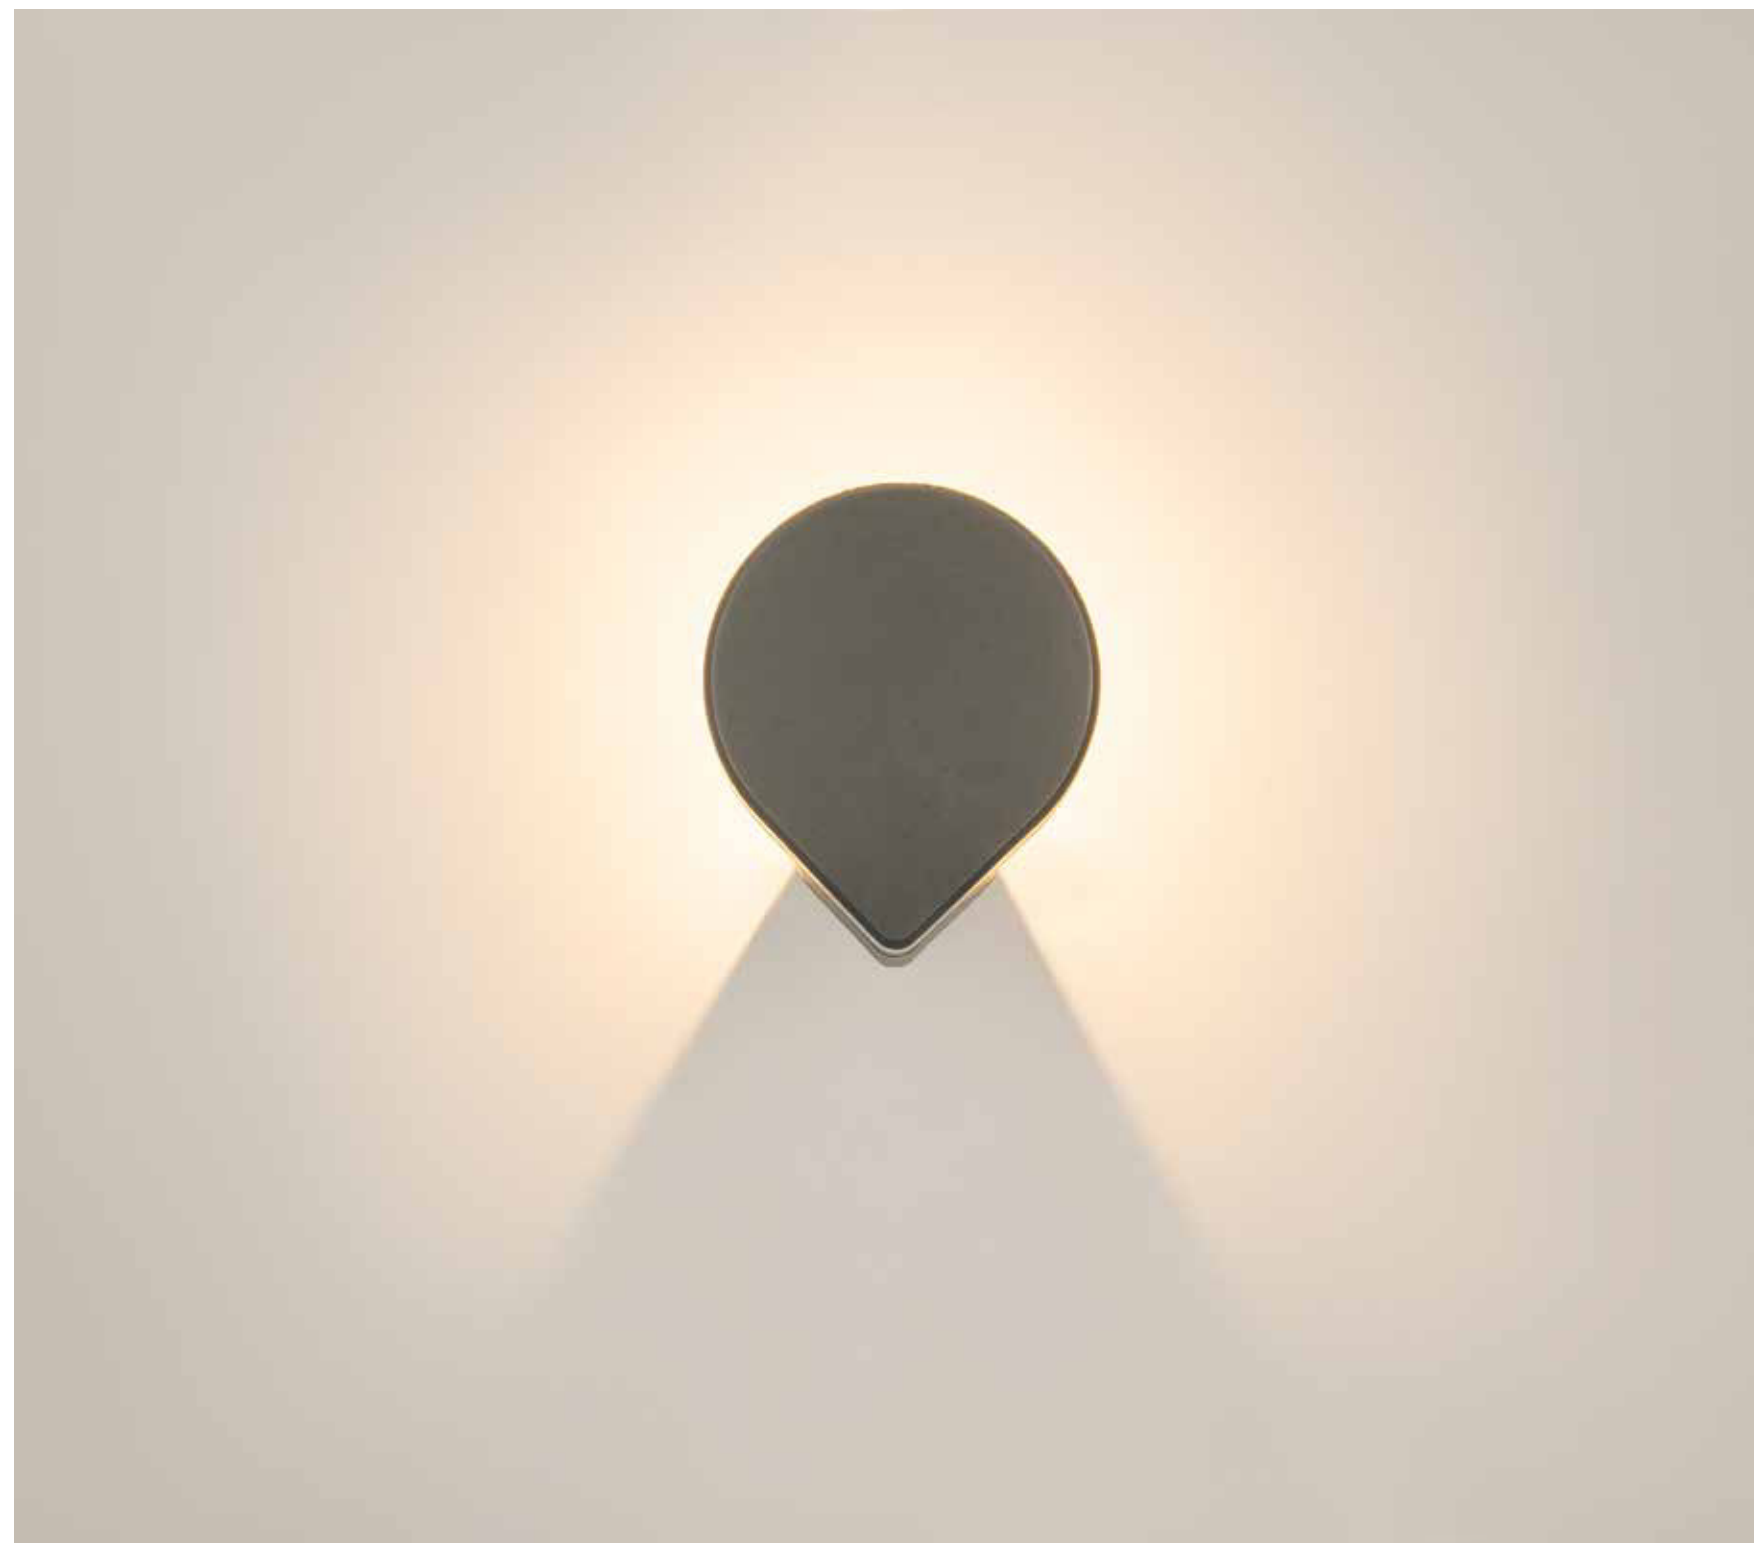



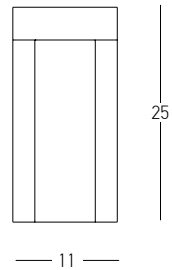


Power 12W
 Input 220-240V, 50/60Hz
 Color Temperature 3000K
 Lumen 867Lm
 Cri 80
 IP 54
 Dimensions Ø: 11cm H: 25cm
 Material Aluminium
 Color Graphite / **Code E133**

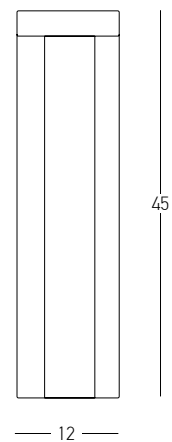

Power 3x 5W
 Input 220-240V, 50/60Hz
 Color Temperature 3000K
 Lumen 1117Lm
 Cri 80
 IP 54
 Dimensions Ø: 12cm H: 45cm
 Material Aluminium
 Color Graphite / **Code E132**

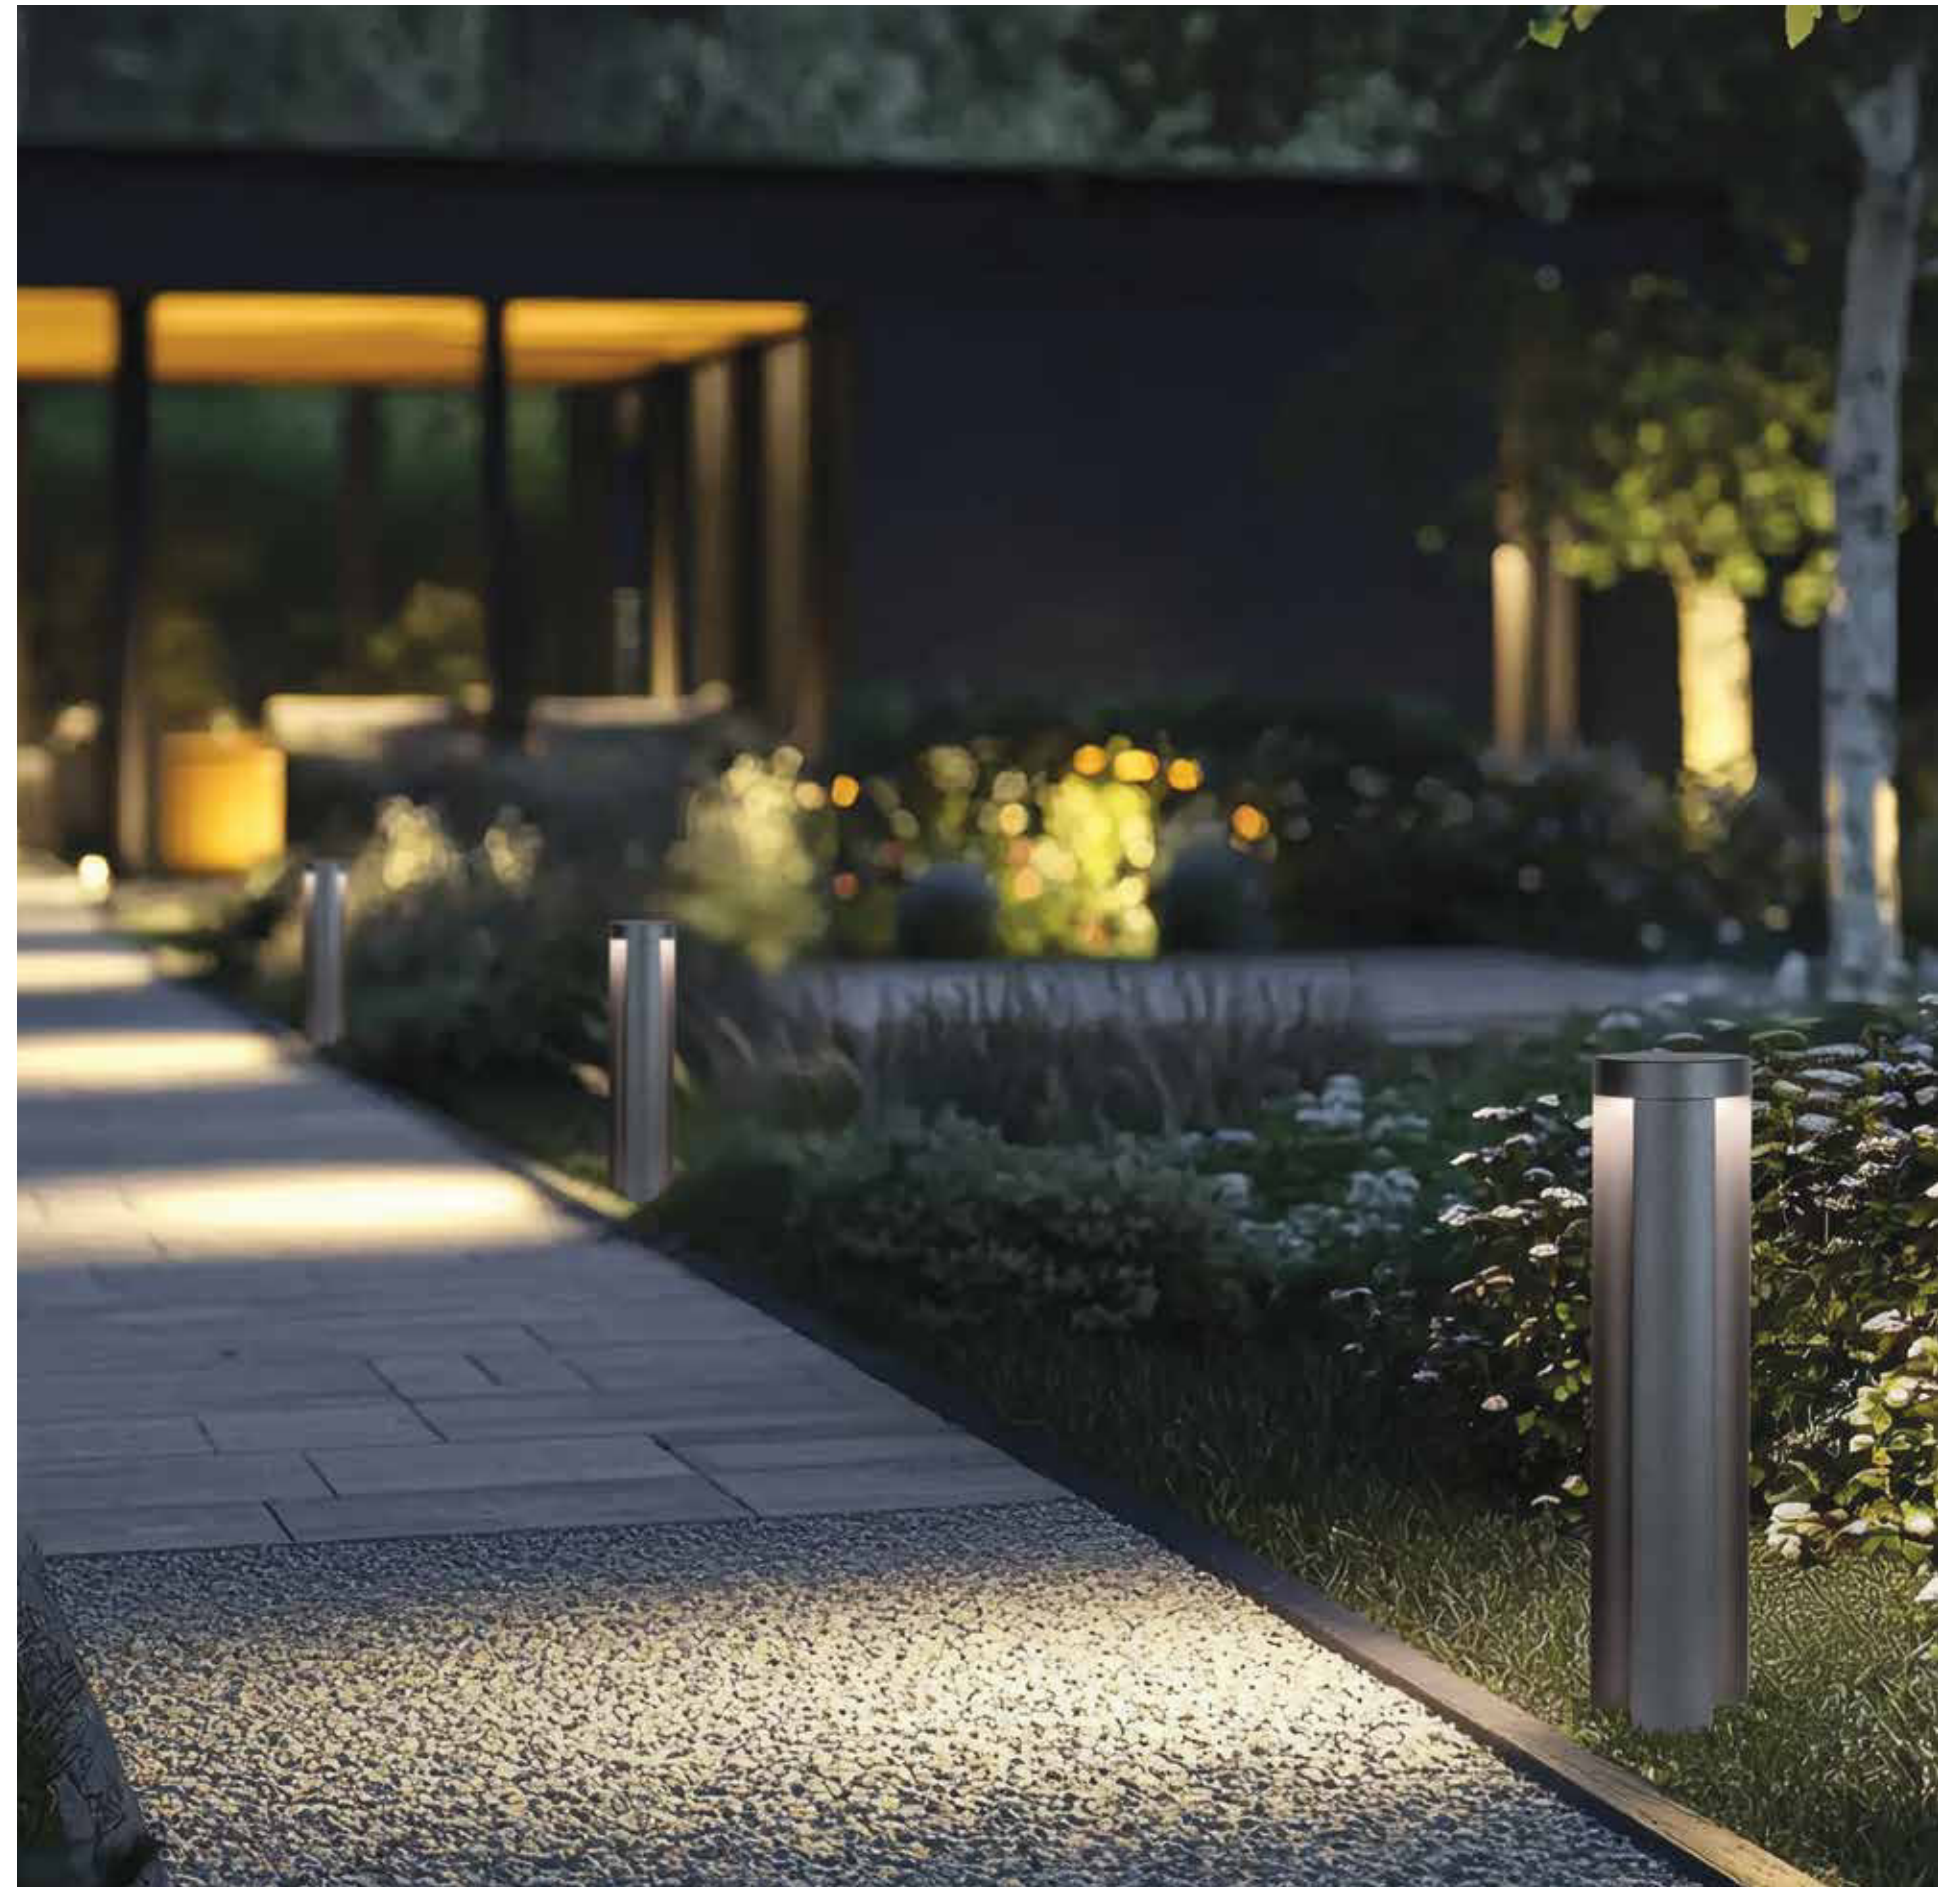


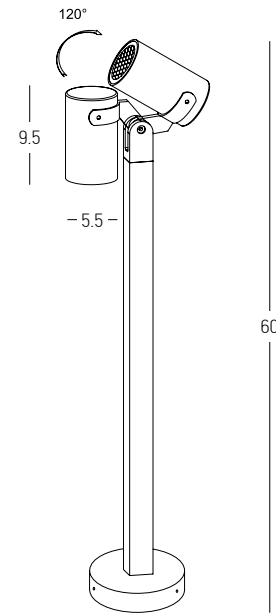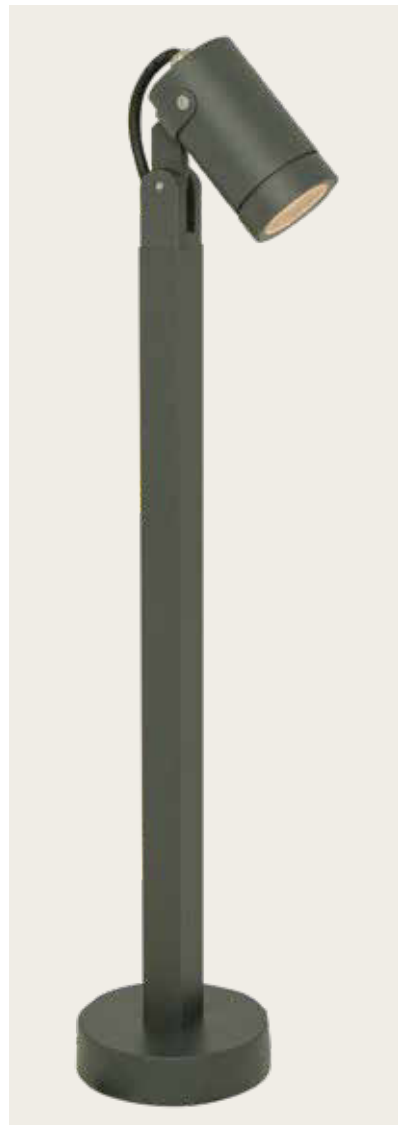


Bulb 1x GU10
 Power 15W MAX
 Input 220-240V, 50/60Hz
 IP 54
 Dimensions L: 11.5cm W: 5.5cm H: 60cm
 Base Ø: 11.5cm H: 3cm
 Spot Dimensions Ø: 5.5cm L: 9.5cm
 Material Aluminium - Tempered Glass
 Special Feature Tilt Up-Down
 Honeycomb Included
 Color Graphite / **Code E325**








Power 12W
 Input 220-240V, 50/60Hz
 Color Temperature 3000K
 Lumen 920Lm
 Cri 80
 IP 54
 Dimensions Ø: 15cm L: 5.5cm
 Material Aluminium - PC Diffuser
 Color Graphite / **Code E237**

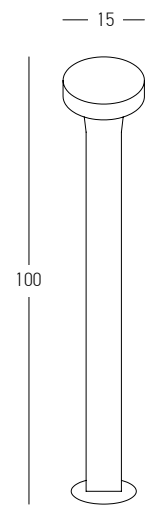



Power 11W
 Input 220-240V, 50/60Hz
 Color Temperature 3000K
 Lumen 792Lm
 Cri 80
 IP 65
 Dimensions Ø: 15cm H: 100cm
 Material Aluminium - PC Diffuser
 Color Graphite / **Code E249**




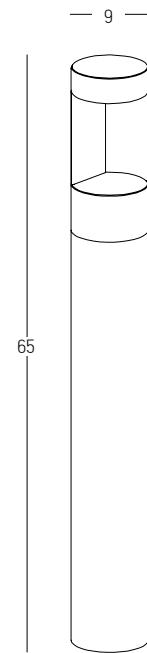


Power 9W
Input 220-240V, 50/60Hz
Color Temperature 3000K
Lumen 1180Lm
Cri 90
IP 54
Dimensions Ø: 9cm H: 65cm
Beam Angle 120°
Material Aluminium - Tempered Glass
Color Graphite / **Code E298**



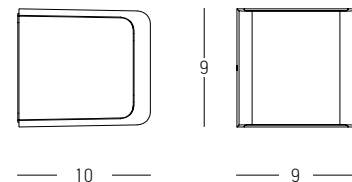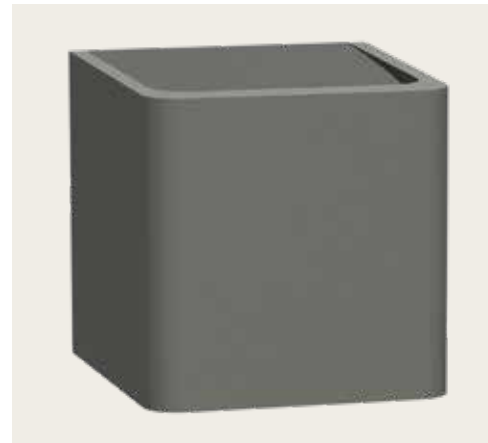


Power 13W
 Input 220-240V, 50/60Hz
 Color Temperature 3000K
 Lumen 767Lm
 Cri 80
 IP 65
 Dimensions L: 10cm W: 9cm H: 9cm
 Material Aluminium
 Special Feature Up-Down Lighting
 Color Graphite / **Code E352**

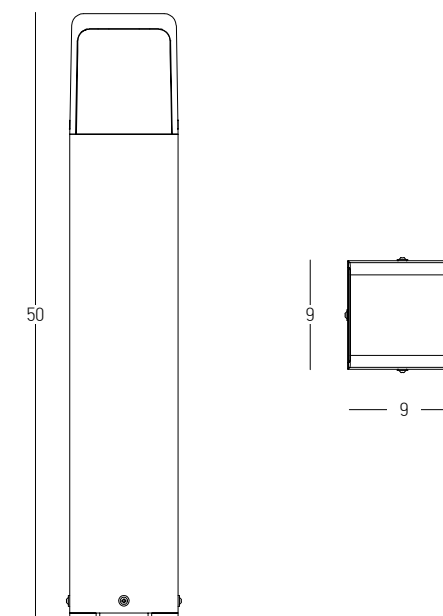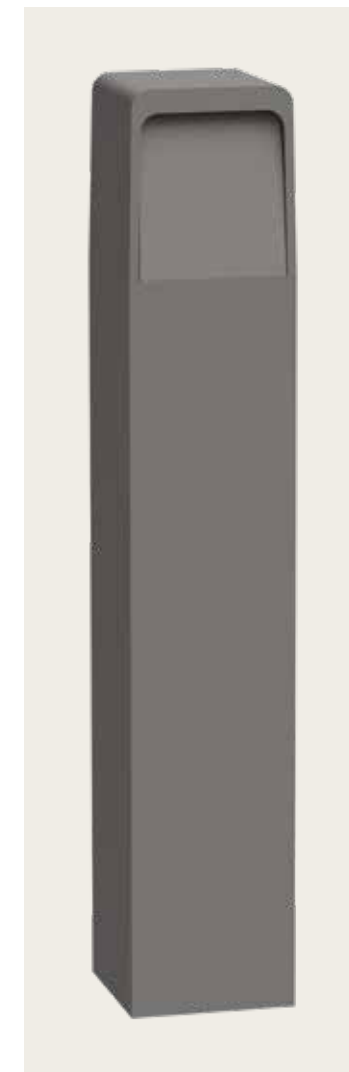



Power 13W
 Input 220-240V, 50/60Hz
 Color Temperature 3000K
 Lumen 767Lm
 Cri 80
 IP 65
 Dimensions L: 9cm W: 9cm H: 50cm
 Material Aluminium
 Special Feature Double Sided Lighting
 Color Graphite / **Code E351**




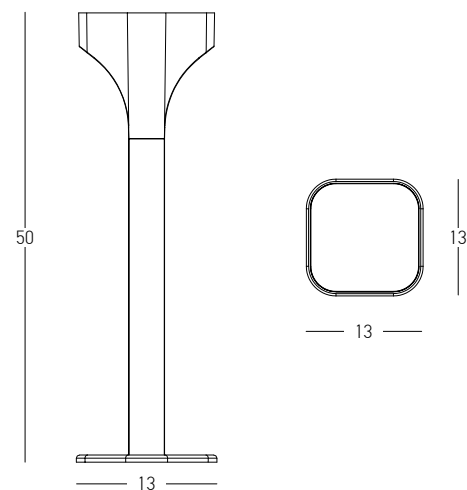


Power 11W
 Input 220-240V, 50/60Hz
 Color Temperature 3000K
 Lumen 993Lm
 Cri 80
 IP 65
 Dimensions L: 13cm W: 13cm H: 50cm
 Base L: 13cm W: 13cm H: 0.5cm
 Beam Angle 120°
 Material Aluminium - PC Diffuser
 Special Feature Double Sided Lighting
 Color Graphite / **Code E356**

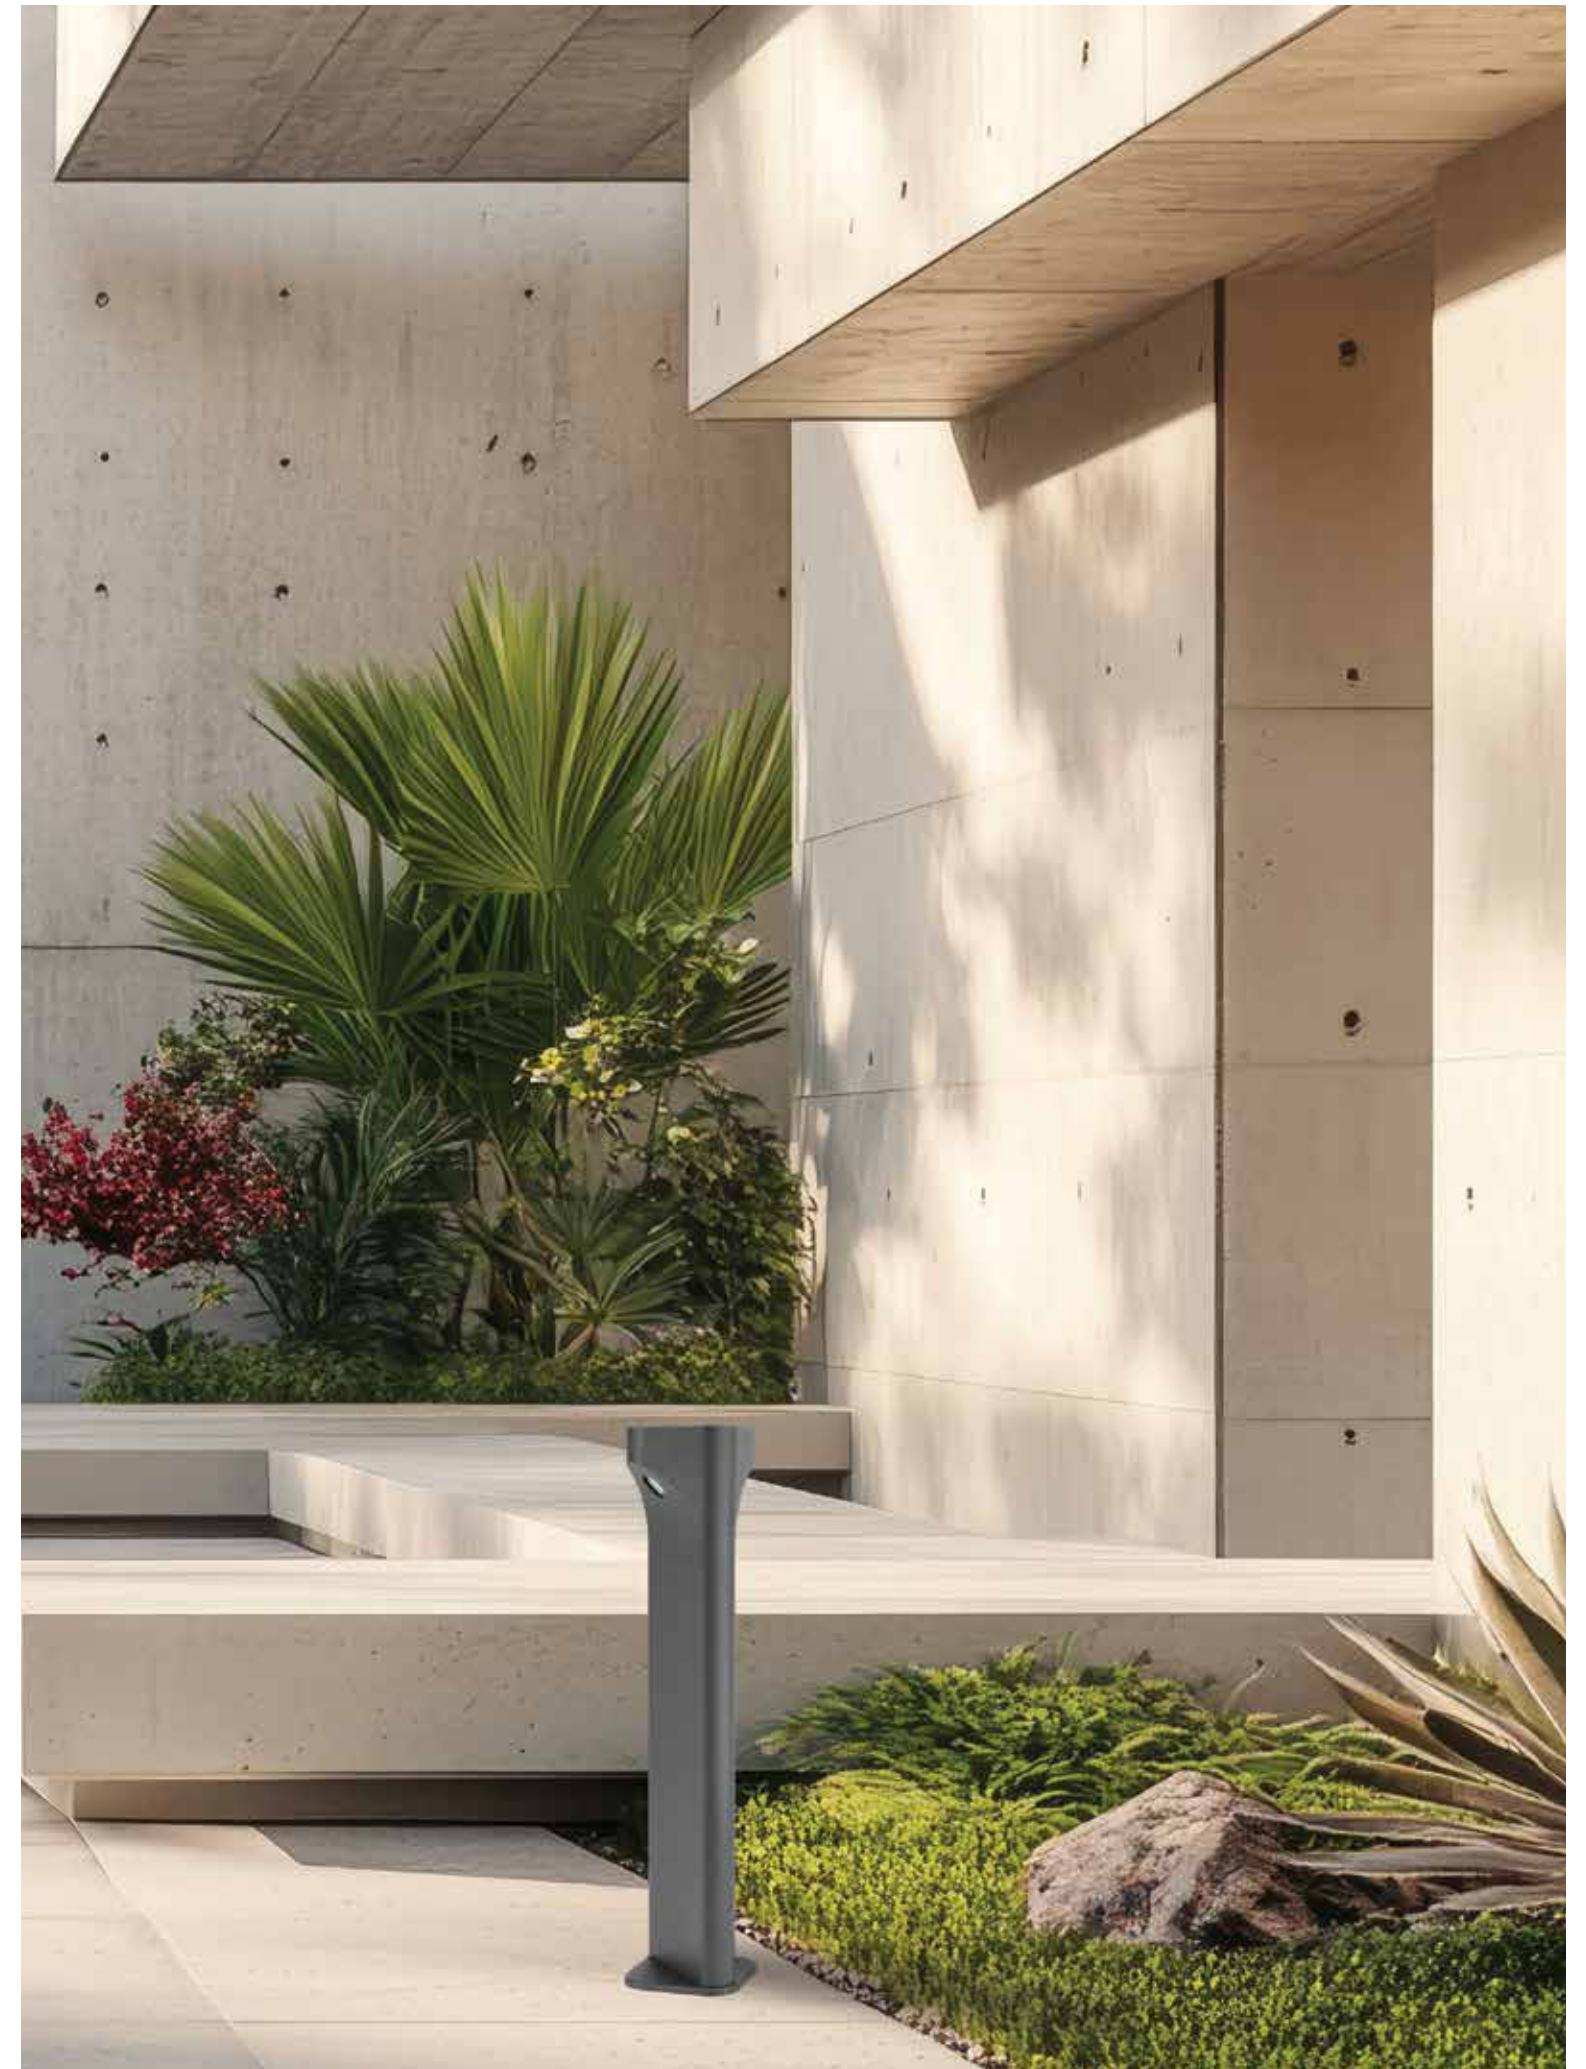


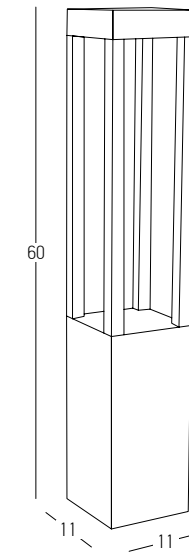


Power 7W
 Input 220-240V, 50/60Hz
 Color Temperature 3000K
 Lumen 658Lm
 Cri 80
 IP 67
 Dimensions L: 11cm W: 11cm H: 60cm
 Beam Angle 120°
 Material Aluminium - Clear Glass
 Color Graphite / **Code E367**

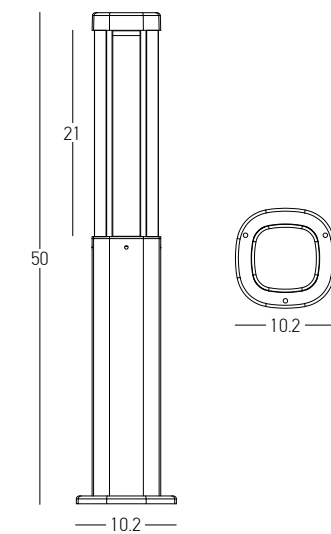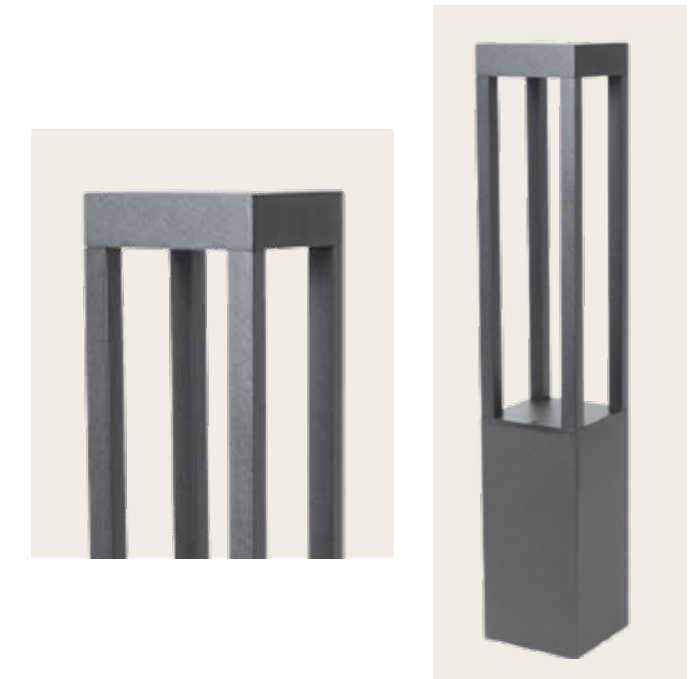


Power 7W
 Input 220-240V, 50/60Hz
 Color Temperature 3000K
 Lumen 533Lm
 Cri 80
 IP 54
 Dimensions L: 10.2cm W: 10.2cm H: 50cm
 Base Ø: 10.2cm H: 1cm
 Beam Angle 120°
 Material Aluminium - PC Diffuser
 Color Graphite / **Code E355**



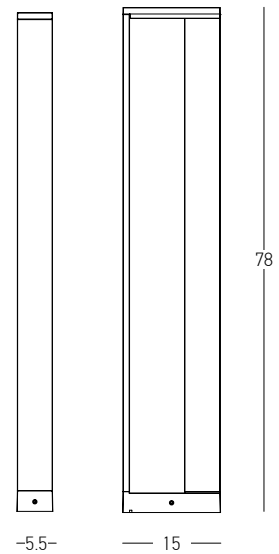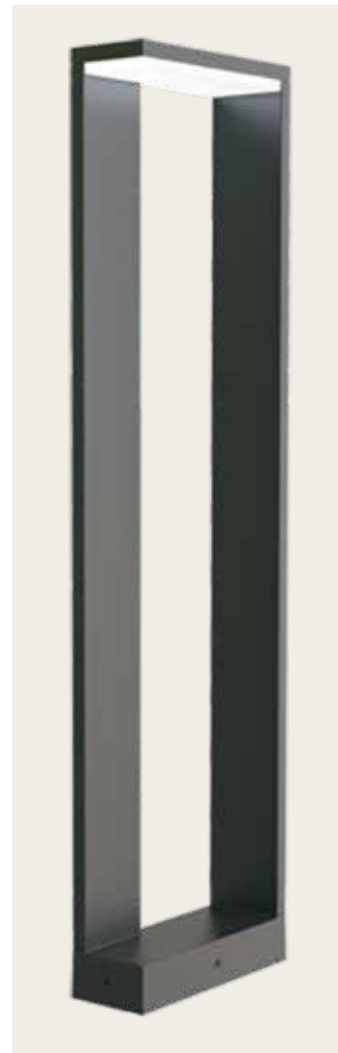


Power 9W
Input 220-240V, 50/60Hz
Color Temperature 3000K
Lumen 653Lm
Cri 80
IP 54
Dimensions L: 15cm W: 5.5cm H: 78cm
Material Aluminium - PC Diffuser
Color Graphite / **Code E208**



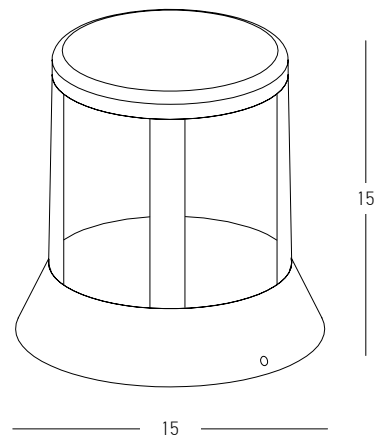

Power 8W
Input 220-240V, 50/60Hz
Color Temperature 3000K
Lumen 557Lm
Cri 80
IP 65
Dimensions Ø: 15cm H: 15cm
Material Aluminium - Clear Diffuser
Color Graphite / **Code E337**




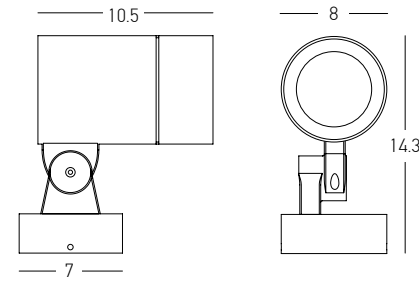


Bulb 1x GU10
 Power 11W MAX
 Input 220-240V, 50/60Hz
 IP 65
 Dimensions Ø: 8cm L: 14.3cm
 Base Ø: 7cm
 Material Aluminium - Tempered Glass
 Special Feature Tilt Up-Down
 Color Graphite / **Code E236**



Power 15W
 Input 220-240V, 50/60Hz
 Color Temperature 3000K
 Lumen 1243Lm
 Cri 80
 IP 65
 Dimensions Ø: 8cm L: 16.2cm
 Base Ø: 7cm
 Beam Angle 32°
 Material Aluminium - Tempered Glass
 Special Feature Tilt Up-Down
 Color Graphite / **Code E235**

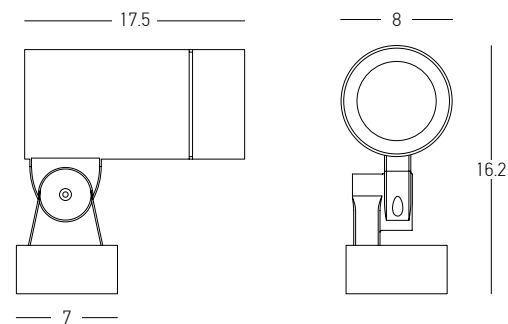


Power 15W
 Input 220-240V, 50/60Hz
 Color Temperature 3000K
 Lumen 1243Lm
 Cri 80
 IP 65
 Dimensions Ø: 8cm L: 16.2cm
 Base Ø: 7cm
 Beam Angle 12°
 Material Aluminium - Tempered Glass
 Special Feature Tilt Up-Down
 Color Graphite / **Code E235-12D**

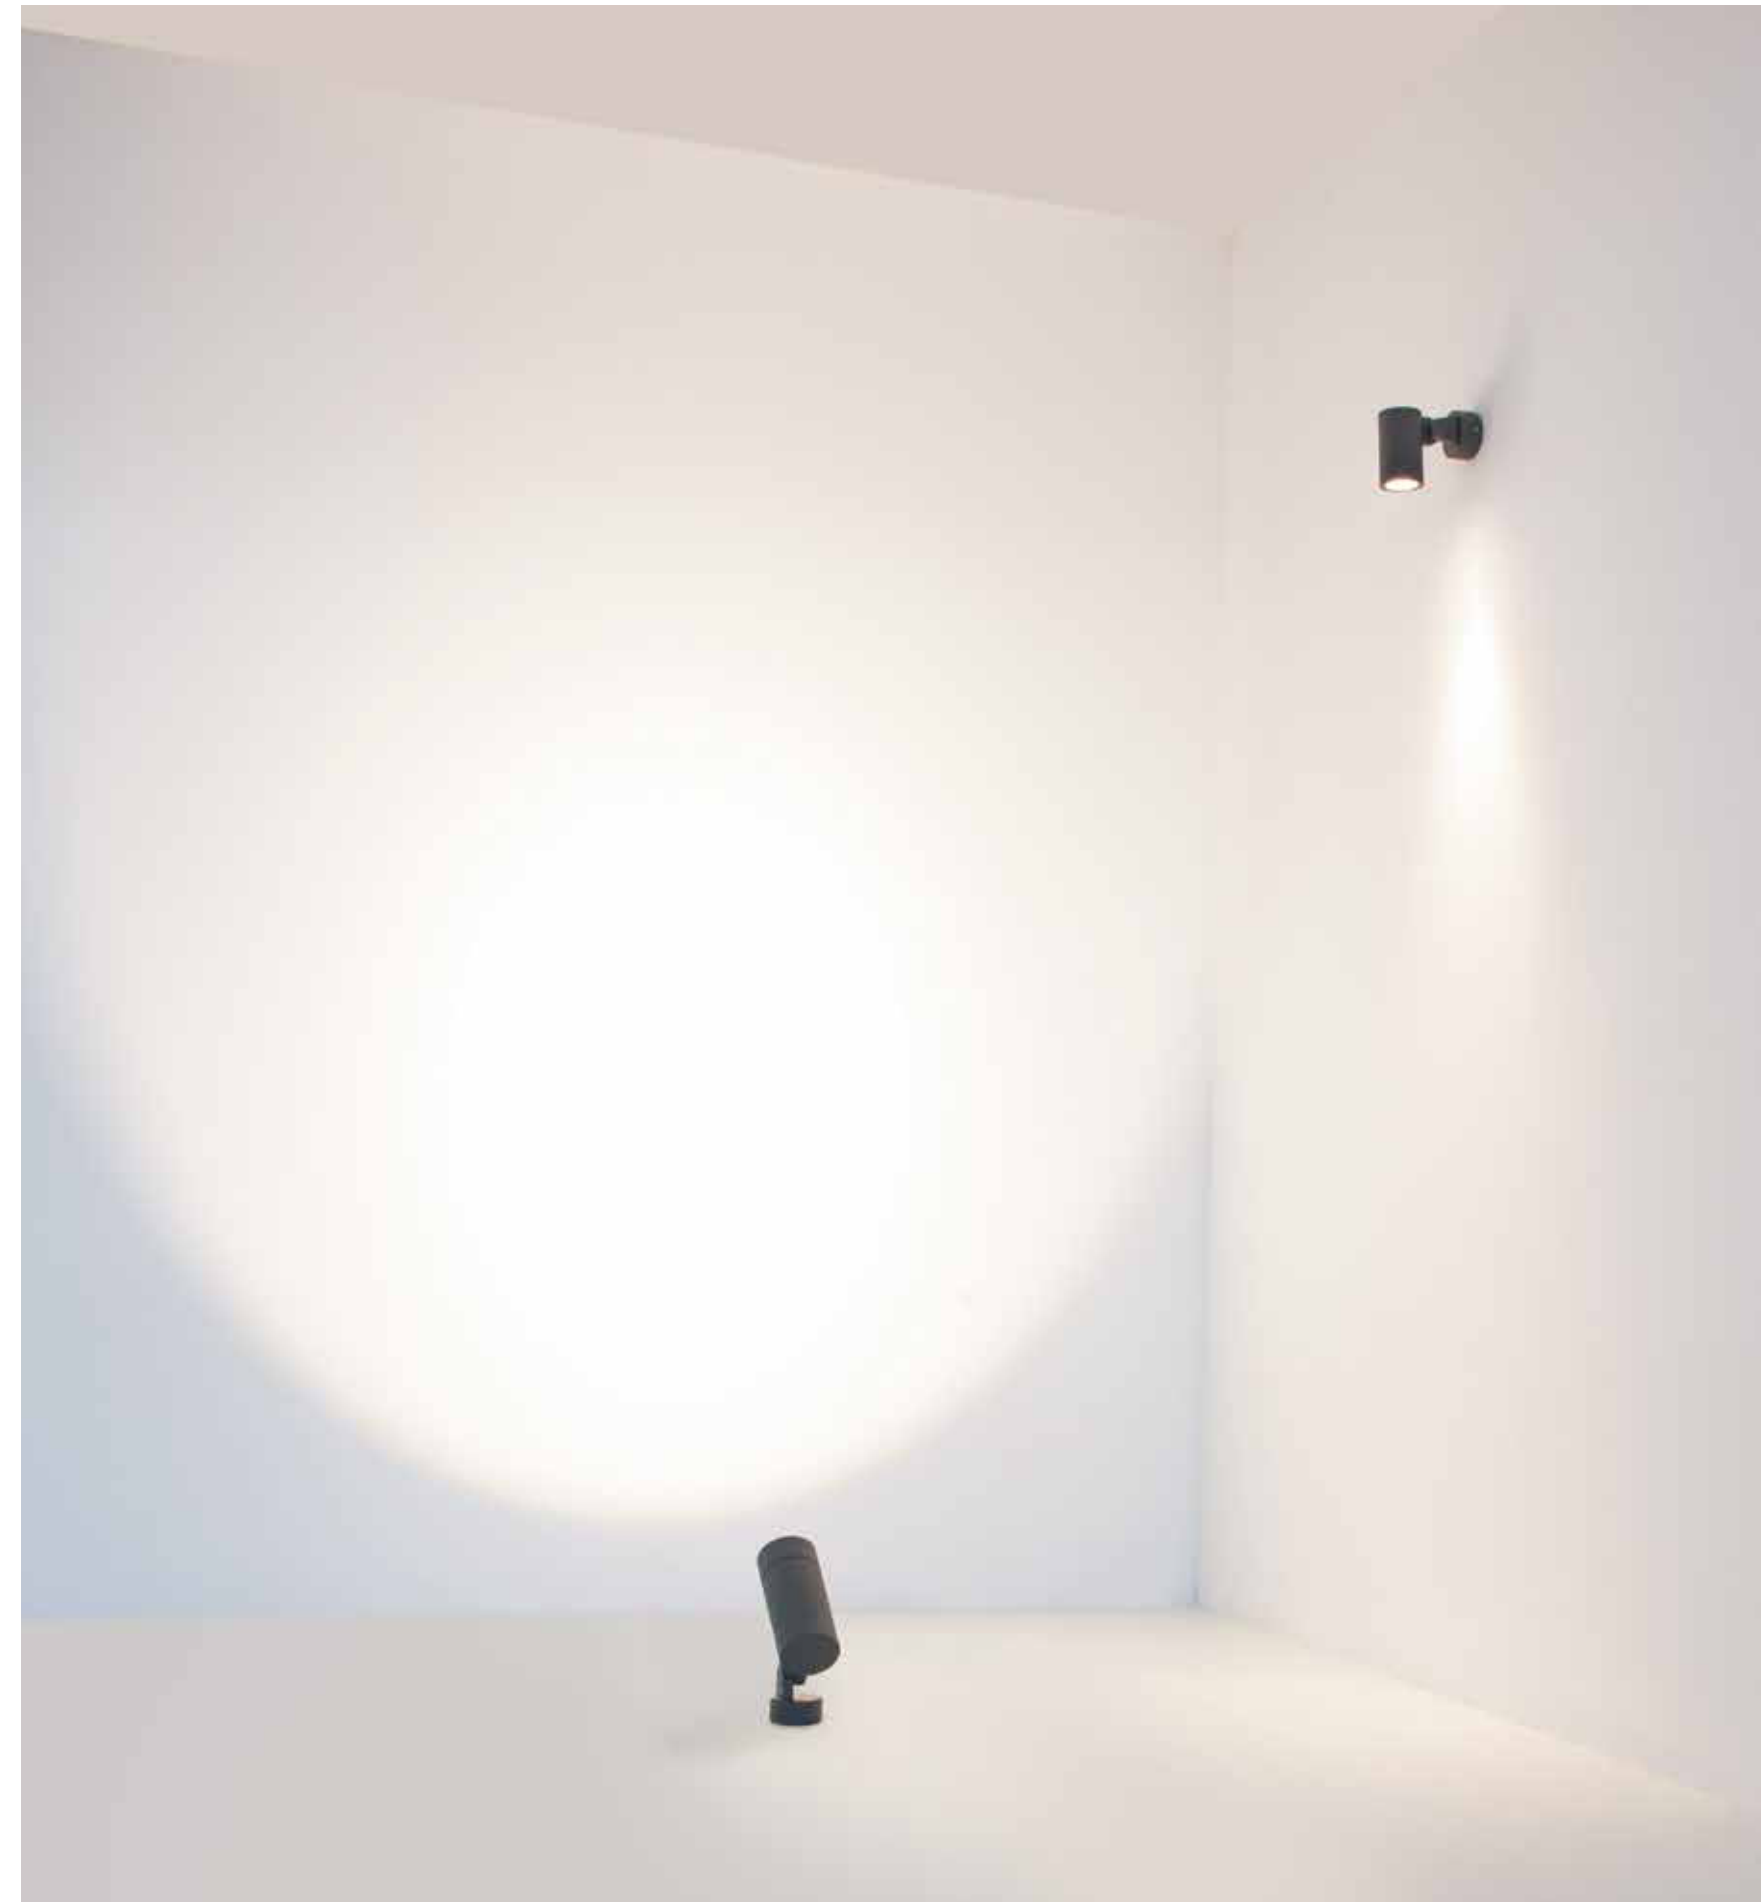

Light That Defines Walls
Captivating outdoor wallscapes with style.




04. WALL

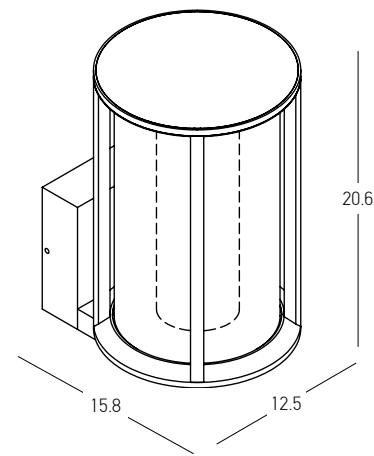


Power 13W
 Input 220-240V, 50/60Hz
 Color Temperature 3000K
 Lumen 789Lm
 Cri 90
 IP 54
 Dimensions L: 15.8cm W: 12.5cm H:20.6cm
 Base L: 3.5cm W: 7.5cm H:9cm
 Material Aluminium - Glass - Acrylic
 Color Beige-Brown (Taupe) / **Code E427**




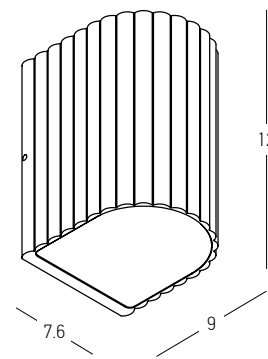


Power 3W
 Input 220-240V, 50/60Hz
 Color Temperature 3000K
 Lumen 191Lm
 Cri 85
 IP 54
 Dimensions L: 9cm W: 7.6cm H: 12cm
 Material Aluminium - Glass
 Color Grey Beige / **Code E419**

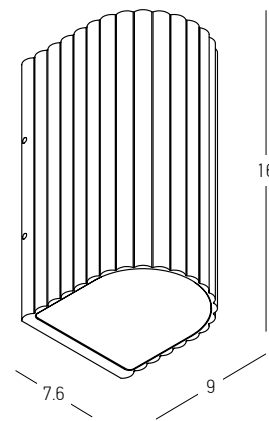


Power 2x 3W
 Input 220-240V, 50/60Hz
 Color Temperature 3000K
 Lumen 405Lm
 Cri 85
 IP 54
 Dimensions L: 9cm W: 7.6cm H: 16cm
 Material Aluminium - Glass
 Special Feature Up-Down Lighting
 Color Grey Beige / **Code E420**

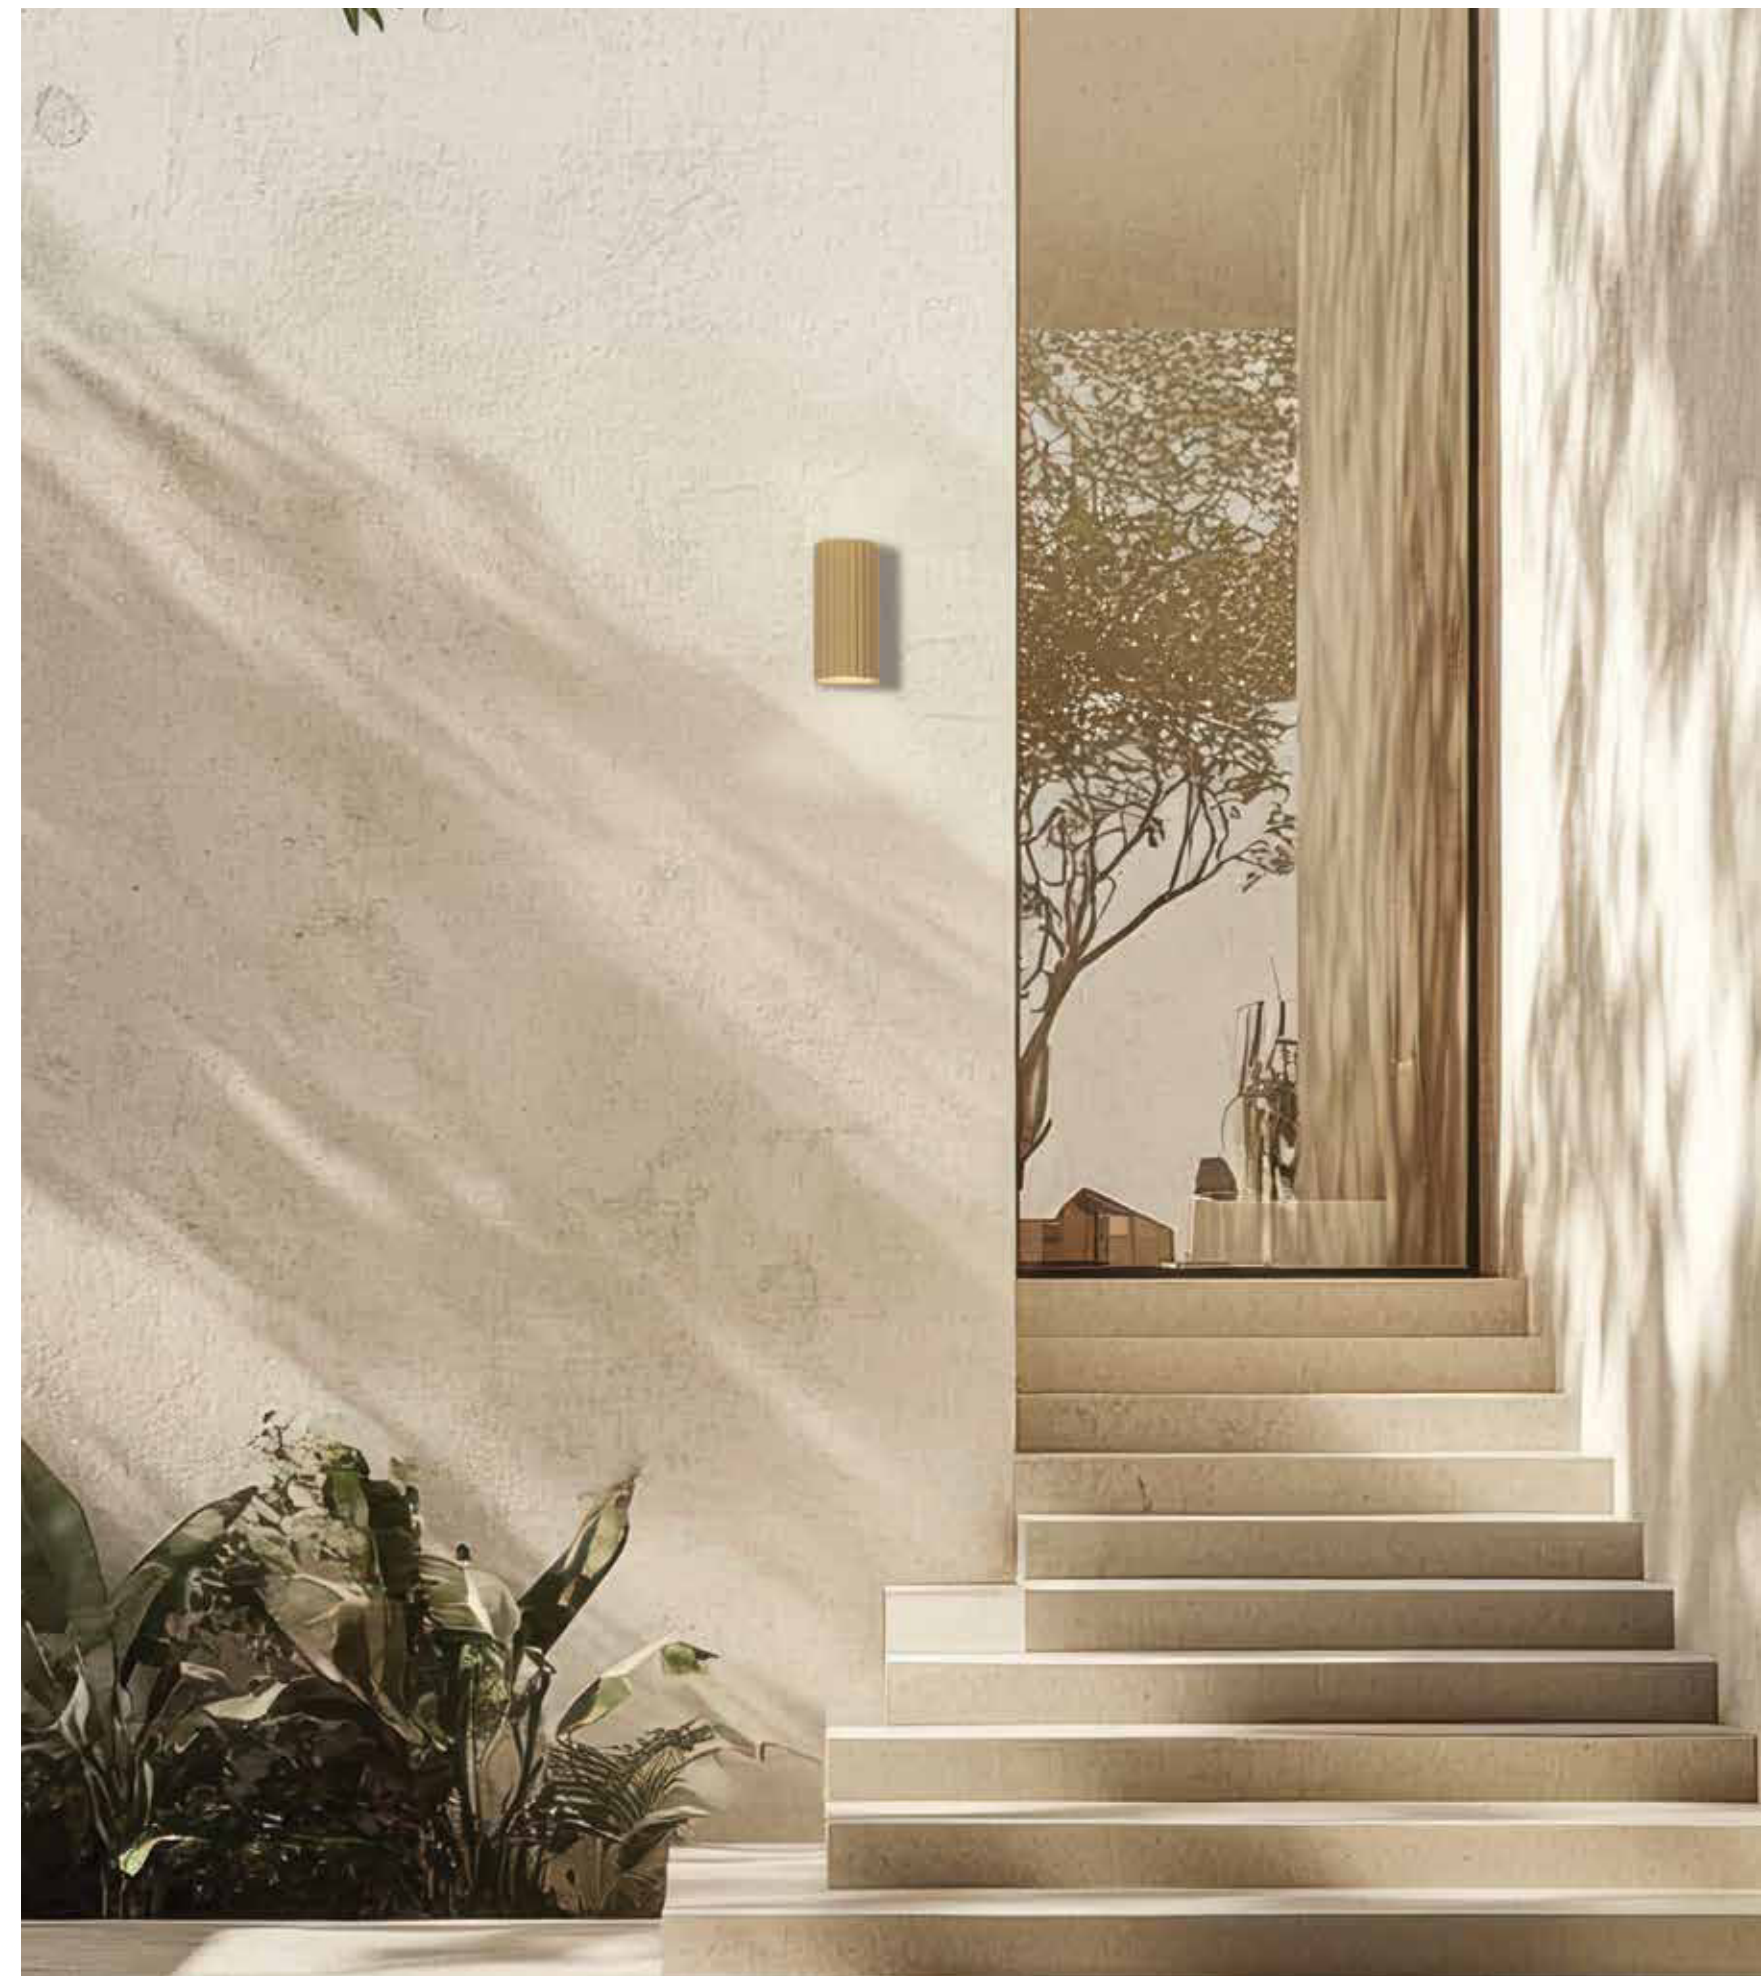


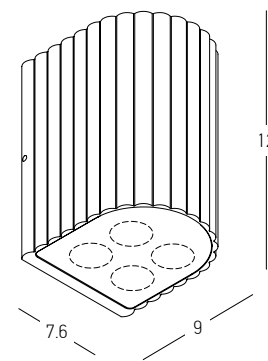


Power 4x 1W
 Input 220-240V, 50/60Hz
 Color Temperature 3000K
 Lumen 280Lm
 Cri 85
 IP 54
 Dimensions L: 9cm W: 7.6cm H: 12cm
 Beam Angle 10°
 Material Aluminium - Glass
 Color Graphite / **Code E421**

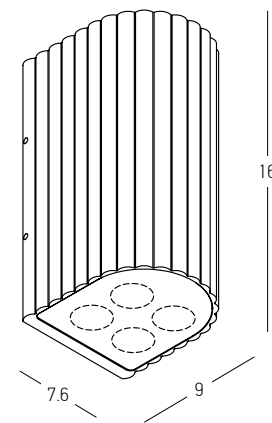

Power 8x 1W
 Input 220-240V, 50/60Hz
 Color Temperature 3000K
 Lumen 560Lm
 Cri 85
 IP 54
 Dimensions L: 9cm W: 7.6cm H: 16cm
 Beam Angle 10°
 Material Aluminium - Glass
 Special Feature Up-Down Lighting
 Color Graphite / **Code E422**



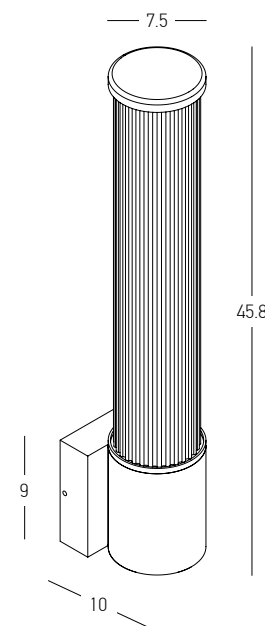

Power 12W
 Input 220-240V, 50/60Hz
 Color Temperature 3000K
 Lumen 832Lm
 Cri 90
 IP 54
 Dimensions Ø: 7.5cm L: 10cm H: 45.8cm
 Base L: 3cm W: 9cm H: 9cm
 Material Aluminium - Glass - Acrylic
 Color Graphite / **Code E428**






WHITE



GREEN




CHAMPAGNE

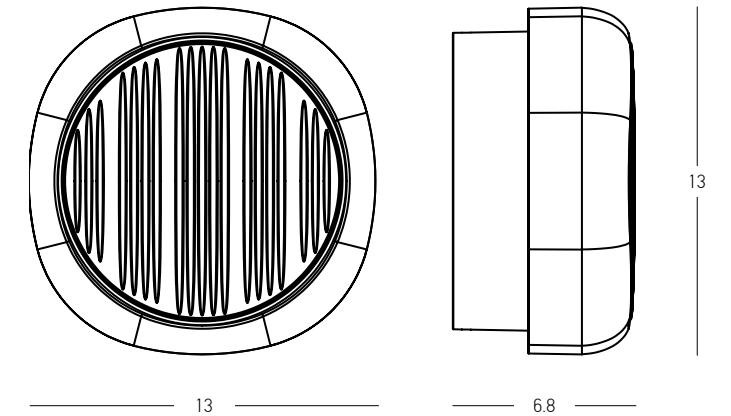


Power	12W
Input	220-240V, 50/60Hz
Color Temperature	3000K
Lumen	885Lm
Cri	90
IP	65
Dimensions	L: 6.8cm W: 13cm H: 13cm
Beam Angle	120°
Dimmable Triac	☉
Material	Aluminium - Acrylic - Glass
Color	White-Sandy Black Base / Code E491
Color	Champagne-Sandy Black Base / Code E492
Color	Green-Sandy Black Base / Code E493



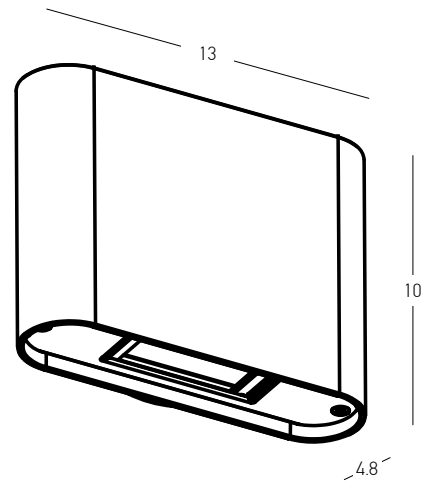


Power 6W
 Input 220-240V, 50/60Hz
 Color Temperature 3000K, 4000K
 Lumen 508Lm, 542Lm
 Cri 80
 IP 65
 Dimensions L: 4,8cm W: 13cm H: 10cm
 Base Ø: 8,8cm L: 1cm
 Material Aluminium - Tempered Glass
 Special Feature CCT Switch
 Adjustable Dual Light Side Cover
 Up-Down Lighting
 Color Sandy Black / **Code E433**




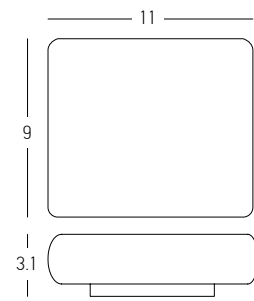

Power 2x 3W
 Input 220-240V, 50/60Hz
 Color Temperature 3000K
 Lumen 480Lm
 Cri 80
 IP 65
 Dimensions L: 3.1cm W: 11cm H: 9cm
 Material Aluminium - Tempered Glass
 Special Feature Up-Down Lighting
 Color Graphite / **Code E238**
 Color Sandy White / **Code E238-W**

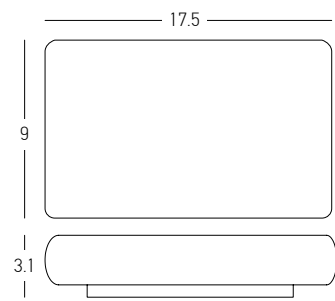


Power 2x 6W
 Input 220-240V, 50/60Hz
 Color Temperature 3000K
 Lumen 960Lm
 Cri 80
 IP 65
 Dimensions L: 3.1cm W: 17.5cm H: 9cm
 Material Aluminium - Tempered Glass
 Special Feature Up-Down Lighting
 Color Graphite / **Code E239**
 Color Sandy White / **Code E239-W**

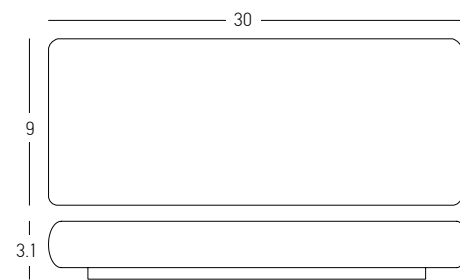


Power 2x 10W
 Input 220-240V, 50/60Hz
 Color Temperature 3000K
 Lumen 1600Lm
 Cri 80
 IP 65
 Dimensions L: 3.1cm W: 30cm H: 9cm
 Material Aluminium - Tempered Glass
 Special Feature Up-Down Lighting
 Color Graphite / **Code E240**
 Color Sandy White / **Code E240-W**





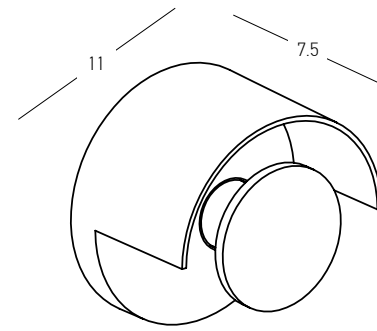






Bulb 1x G9
 Power 12W MAX
 Input 220-240V, 50/60Hz
 IP 65
 Dimensions Ø: 11cm L: 7.5cm
 Material Aluminium - Clear PC Diffuser
 Color Sandy White / **Code E440**

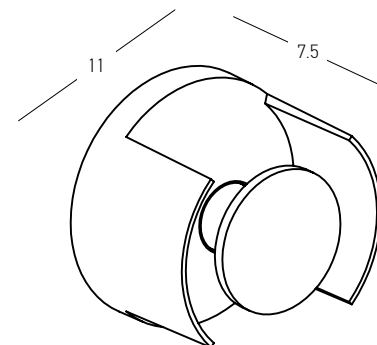

Bulb 1x G9
 Power 12W MAX
 Input 220-240V, 50/60Hz
 IP 65
 Dimensions Ø: 11cm L: 7.5cm
 Material Aluminium - Clear PC Diffuser
 Color Sandy White / **Code E439**



OUTDOOR LIGHTING | WALL

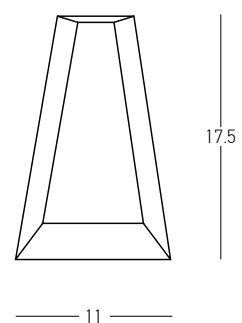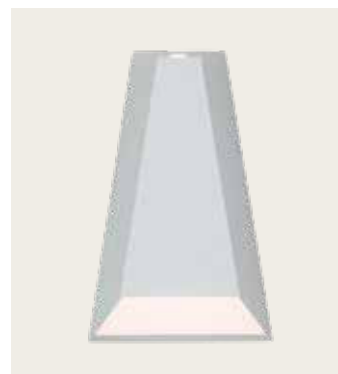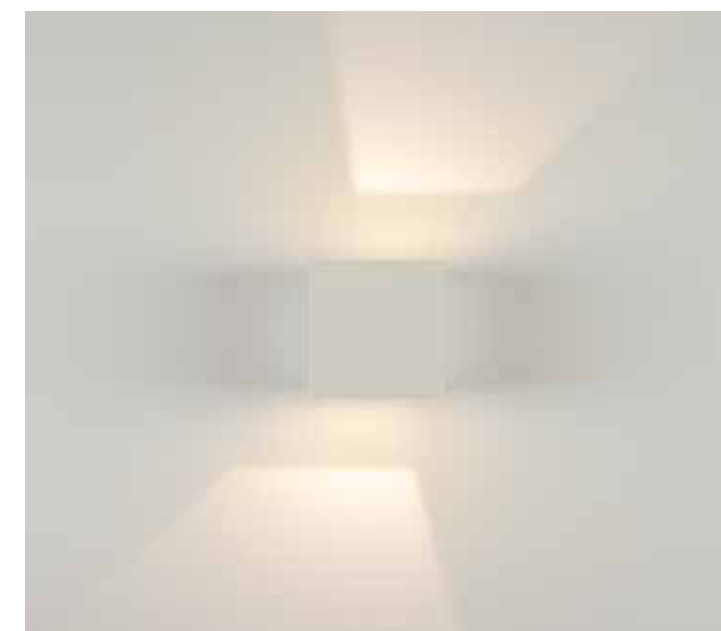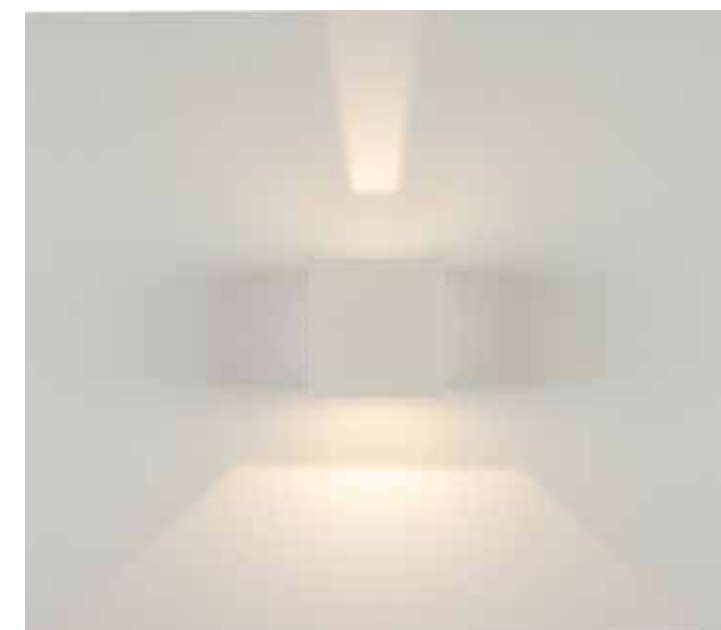
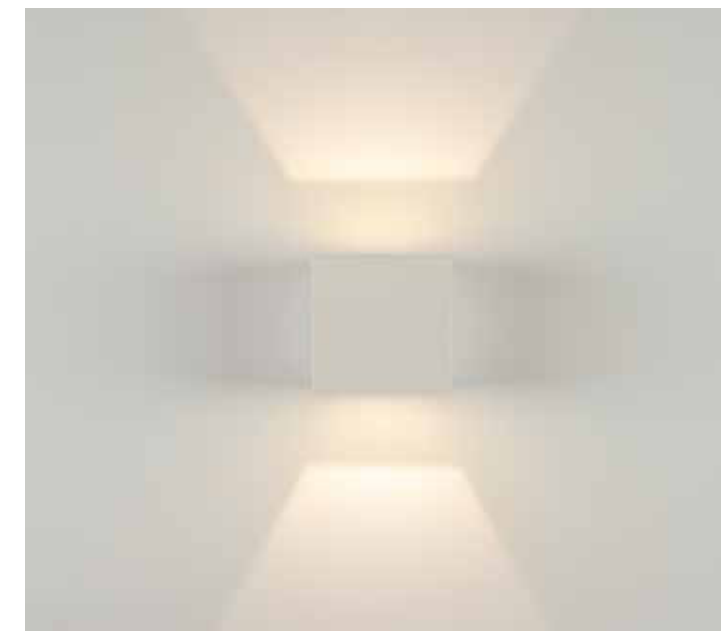




Power 2x 3W
 Input 220-240V, 50/60Hz
 Color Temperature 3000K
 Lumen 480Lm
 Cri 80
 IP 54
 Dimensions L: 6.5cm W: 11cm H: 17.5cm
 Material Aluminium - Tempered Glass
 Special Feature Up-Down Lighting
 Color Graphite / **Code E135**
 Color Sandy White / **Code E156**



Power 2x 3W
 Input 220-240V, 50/60Hz
 Color Temperature 3000K
 Lumen 480Lm
 Cri 80
 IP 54
 Dimensions L: 8.2cm W: 8cm H: 8cm
 Material Aluminium - Tempered Glass
 Special Feature Movable
 Up-Down Lighting

Color Graphite / **Code E109**
 Color Sandy White / **Code E159**



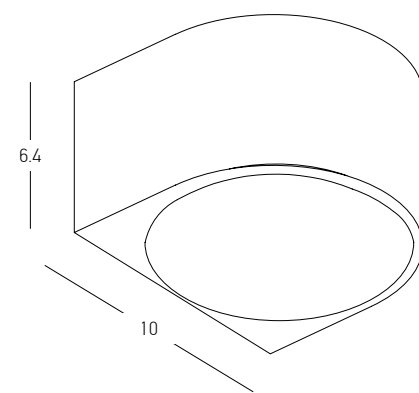
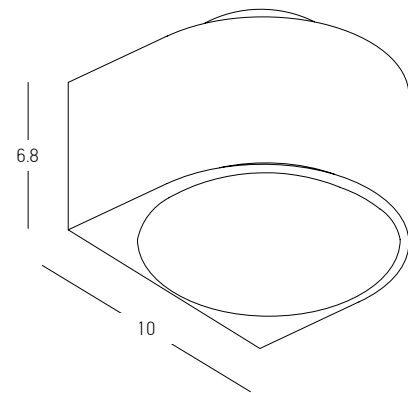


Power 2x 5W
 Input 220-240V, 50/60Hz
 Color Temperature 3000K
 Lumen 929Lm
 Cri 90
 IP 54
 Dimensions L: 11cm W: 10cm H: 6.8cm
 Material Aluminium - Tempered Glass
 Special Feature Up-Down Lighting
 Color Graphite / **Code E317**





Power 5W
 Input 220-240V, 50/60Hz
 Color Temperature 3000K
 Lumen 544Lm
 Cri 90
 IP 54
 Dimensions L: 11cm W: 10cm H: 6.4cm
 Material Aluminium - Tempered Glass
 Color Graphite / **Code E316**



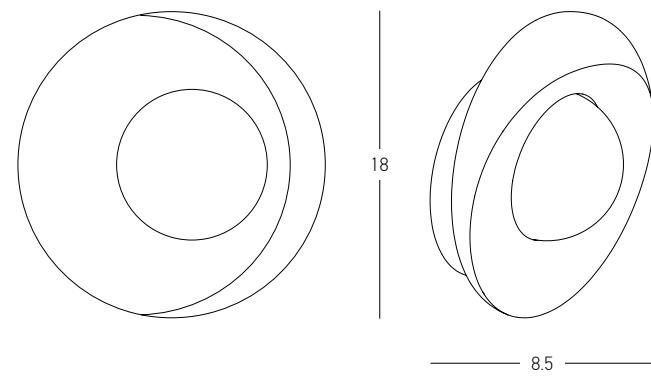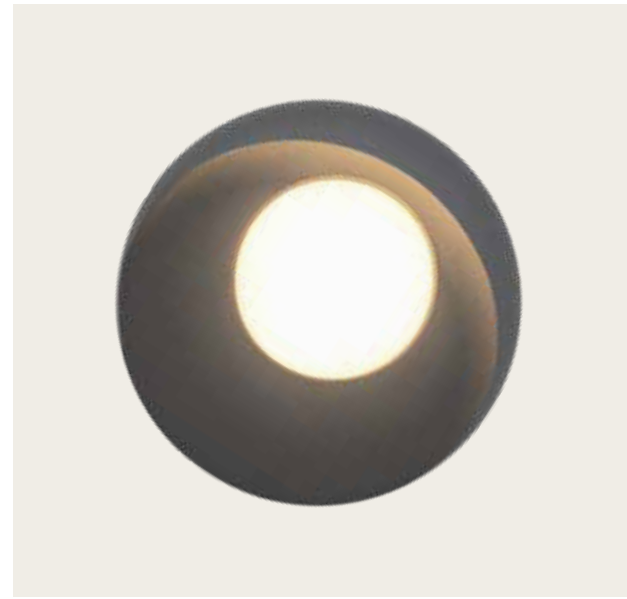


Power 6W
 Input 220-240V, 50/60Hz
 Color Temperature 3000K
 Lumen 490Lm
 Cri 80
 IP 54
 Dimensions Ø: 18cm L: 8.5cm
 Base Ø: 12cm L: 5.5cm
 Material Aluminium - PC Diffuser
 Special Feature Diffuser Ø: 8.5cm
 Color Graphite / **Code E413**



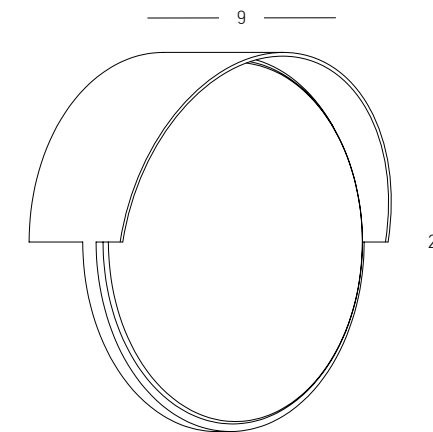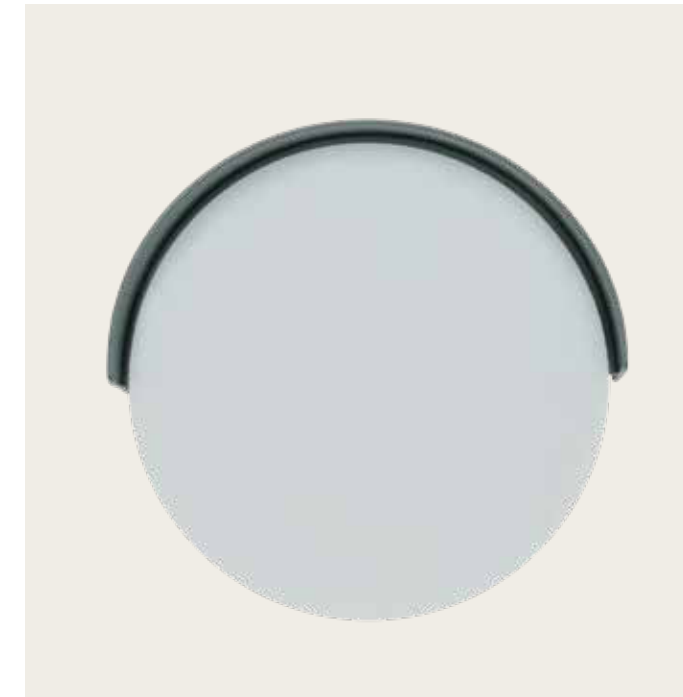



Power 10W
 Input 220-240V, 50/60Hz
 Color Temperature 3000K
 Lumen 875Lm
 Cri 85
 IP 54
 Dimensions Ø: 20cm L: 9cm
 Material Aluminium - PC Diffuser
 Color Graphite / **Code E414**



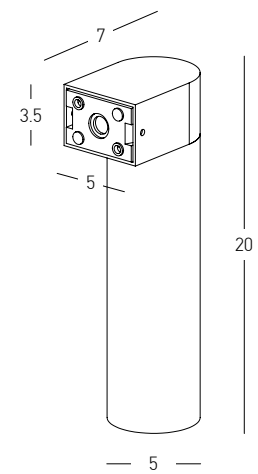



Power	5W
Input	220-240V, 50/60Hz
Color Temperature	3000K
Lumen	300Lm
Cri	90
IP	65
Dimensions	Ø: 5cm L: 7cm H: 20cm
Base	L: 7cm W: 5cm H: 3.5cm
Beam Angle	34°
Material	Aluminium - Glass
Color	Graphite / Code E415

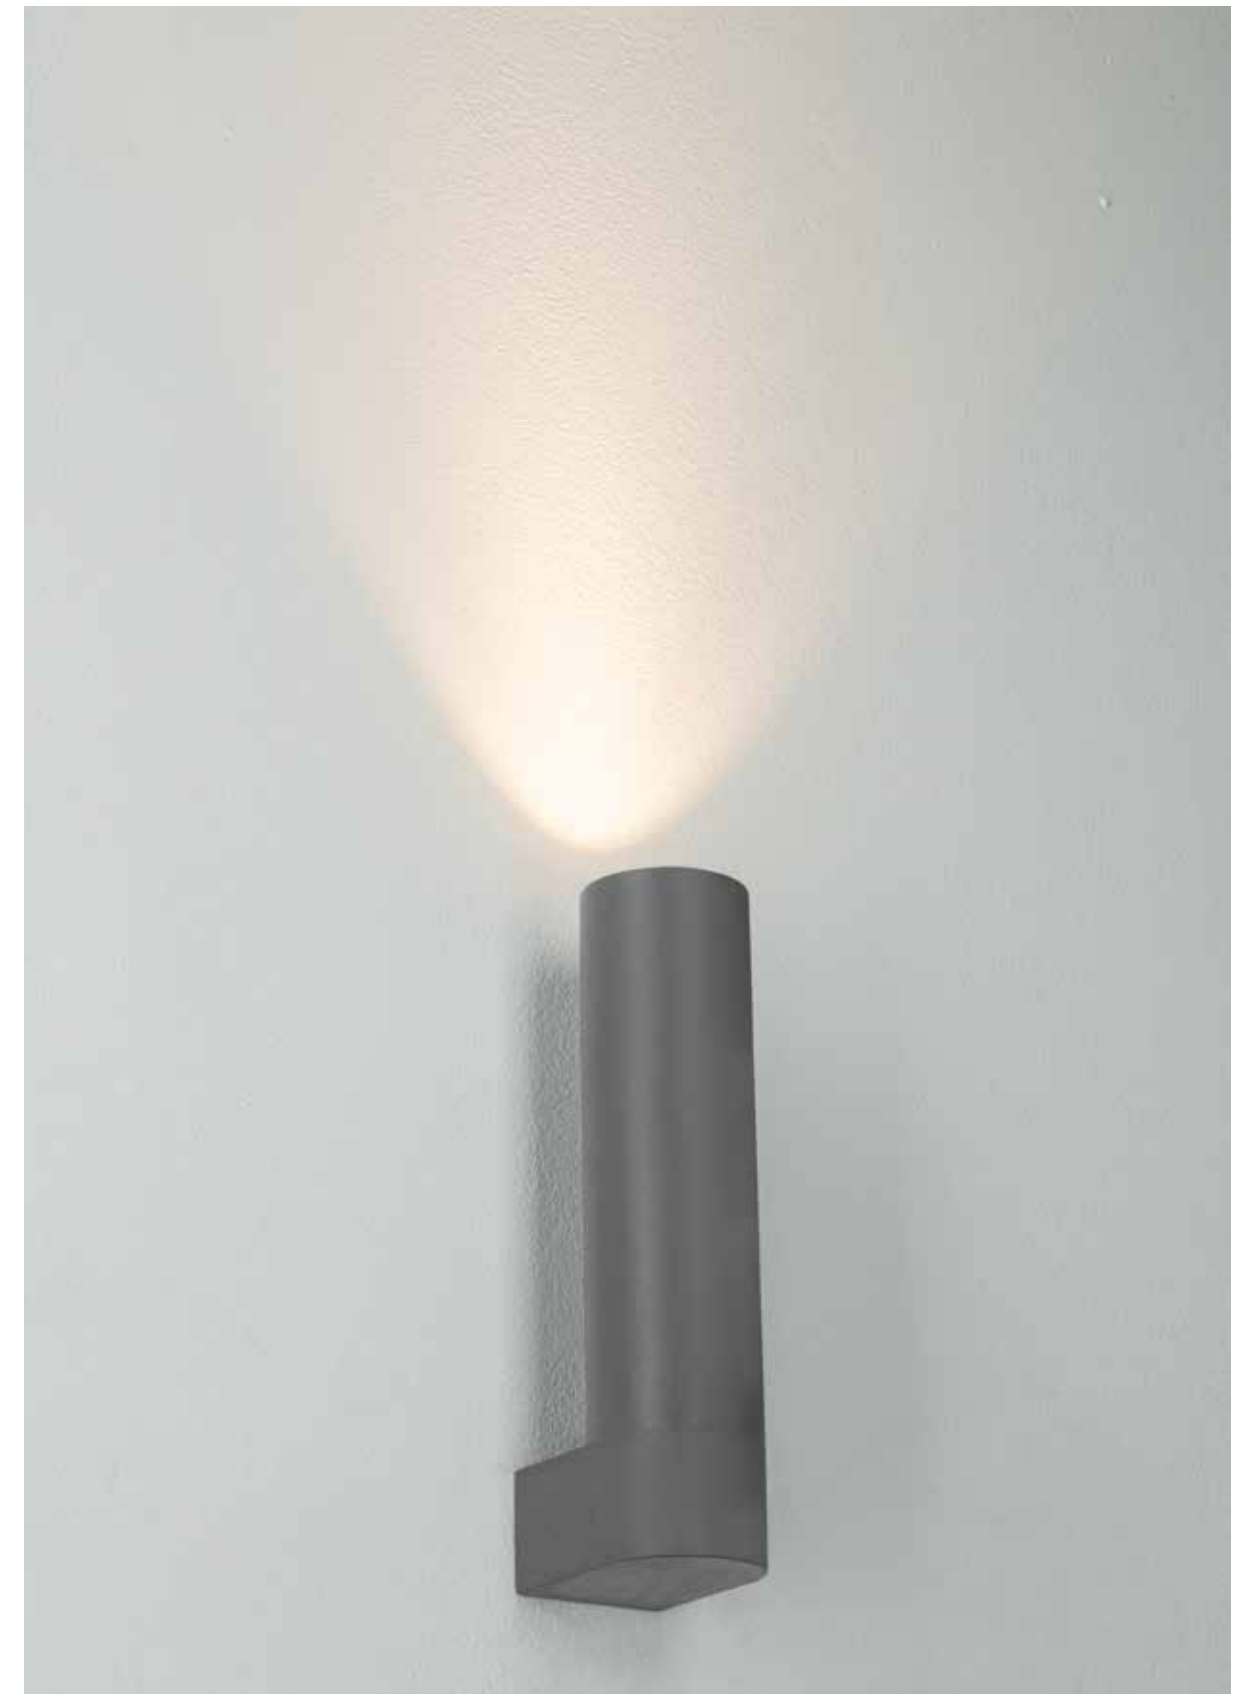

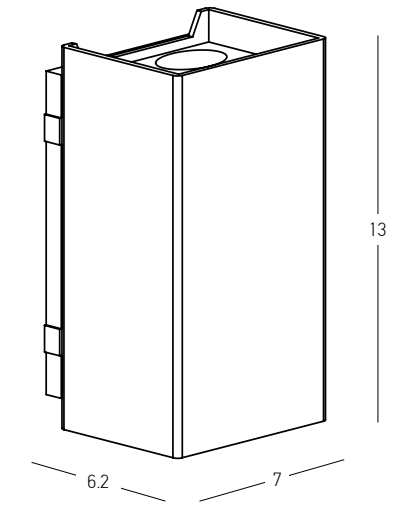

Power	2x 3W
Input	220-240V, 50/60Hz
Color Temperature	3000K
Lumen	350Lm
Cri	90
IP	65
Dimensions	L: 6.2cm W: 7cm H: 13cm
Base	L: 1.7cm W: 7cm H: 11cm
Beam Angle	6.5°
Material	Aluminium - Glass
Special Feature	Up-Down Lighting
Color	Graphite / Code E412




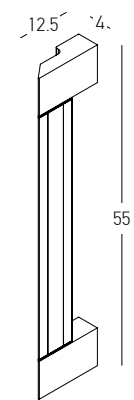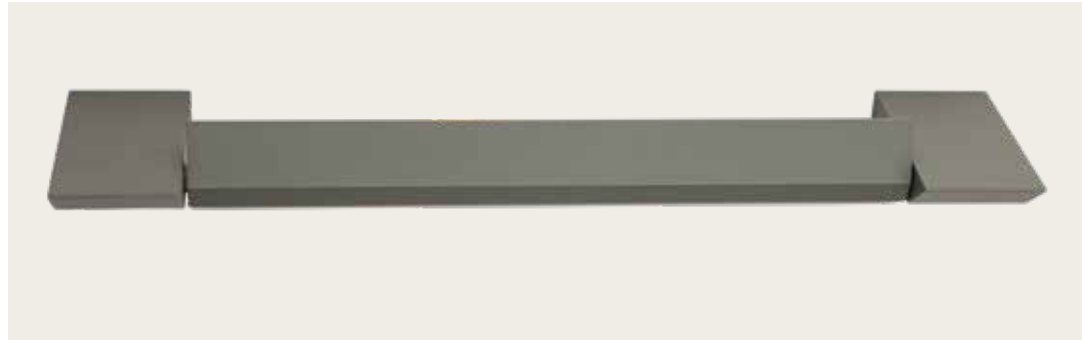

Power 12W
 Input 220-240V, 50/60Hz
 Color Temperature 3000K
 Lumen 617Lm
 Cri 80
 IP 54
 Dimensions L: 12.5cm W: 4cm H: 55cm
 Base 2x W: 4cm H: 7cm
 Material Aluminium - Acrylic
 Special Feature 350° Rotatable
 Profile 7.2x2.5cm


Color Graphite / **Code E429**
 Color Dark Brown / **Code E430**



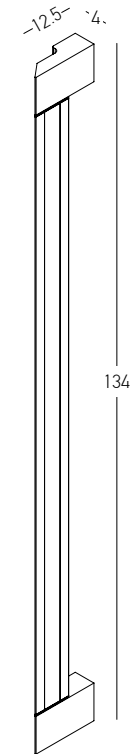

Power	36W
Input	220-240V, 50/60Hz
Color Temperature	3000K
Lumen	2000Lm
Cri	80
IP	54
Dimensions	L: 12.5cm W: 4cm H: 134cm
Base	2x W: 4cm H: 7cm
Material	Aluminium - Acrylic
Special Feature	350° Rotatable Profile 7.2x2.5cm
Color	Graphite / Code E431
Color	Dark Brown / Code E432




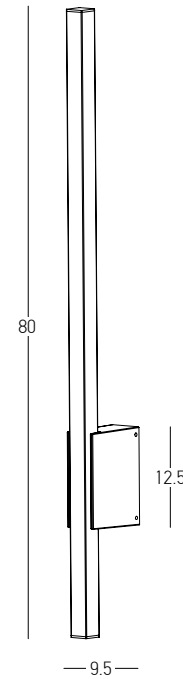

Power 12W
 Input 220-240V, 50/60Hz
 Color Temperature 3000K
 Lumen 1187Lm
 Cri 80
 IP 65
 Dimensions L: 9.5cm W: 4.5cm H: 80cm
 Base L: 9cm W: 4.5cm H: 12.5cm
 Material Aluminium - PC Diffuser
 Color Graphite / **Code E287**


IP 65 **LED**



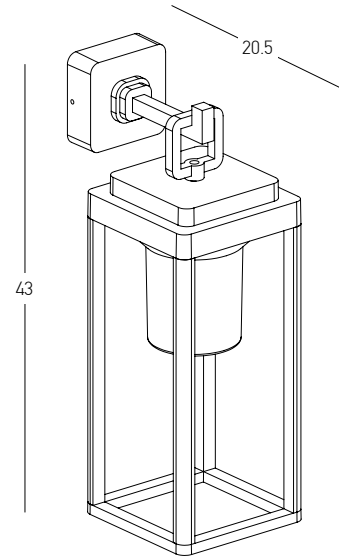



Bulb 1x E27
Power 15W MAX
Input 220-240V, 50/60Hz
IP 65
Dimensions L: 20.5cm W: 14.5cm H: 43cm
Base L: 3.3cm W: 9cm H: 9cm
Material Aluminium - Clear Diffuser
Color Dark Brown / **Code E343**




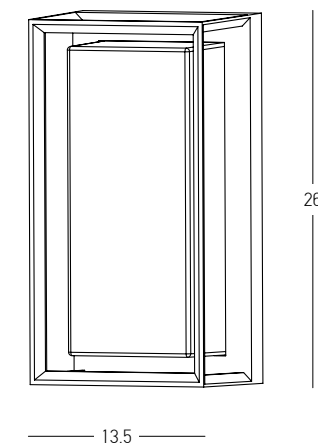


Bulb 1x E27
Power 15W MAX
Input 220-240V, 50/60Hz
IP 54
Dimensions L: 12cm W: 13.5cm H: 26cm
Base L: 2.5cm W: 9.3cm H: 22cm
Material Aluminium - PC Diffuser
Color Graphite-Smoked Diffuser / **Code E434**




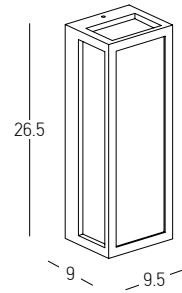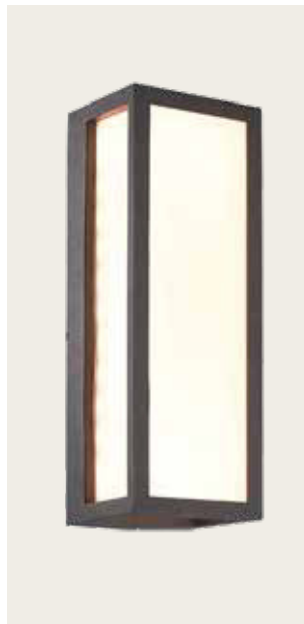

Power 10W
 Input 220-240V, 50/60Hz
 Color Temperature 3000K
 Lumen 810Lm
 Cri 80
 IP 65
 Dimensions L: 9cm W: 9.5cm H: 26.5cm
 Material Aluminium - PC Diffuser
 Color Sandy Black / **Code E202**

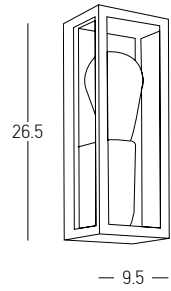
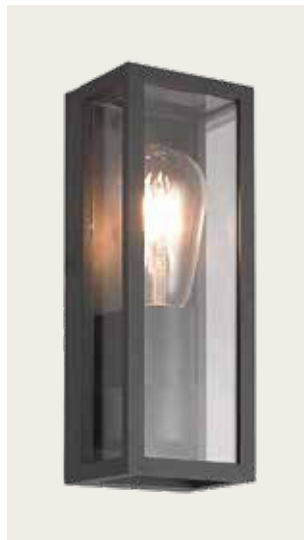


Bulb 1x E27
 Power 15W MAX
 Input 220-240V, 50/60Hz
 IP 65
 Dimensions L: 9cm W: 9.5cm H: 26.5cm
 Material Aluminium - Clear Diffuser
 Color Sandy Black / **Code E201**

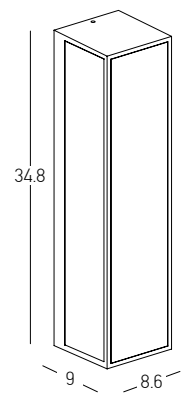


Bulb 2x E27
 Power 15W MAX
 Input 220-240V, 50/60Hz
 IP 54
 Dimensions L: 9cm W: 8.6cm H: 34.8cm
 Material Aluminium - Tempered Glass
 Color Graphite / **Code E296**



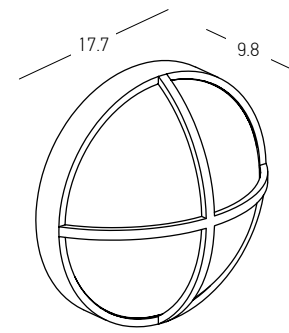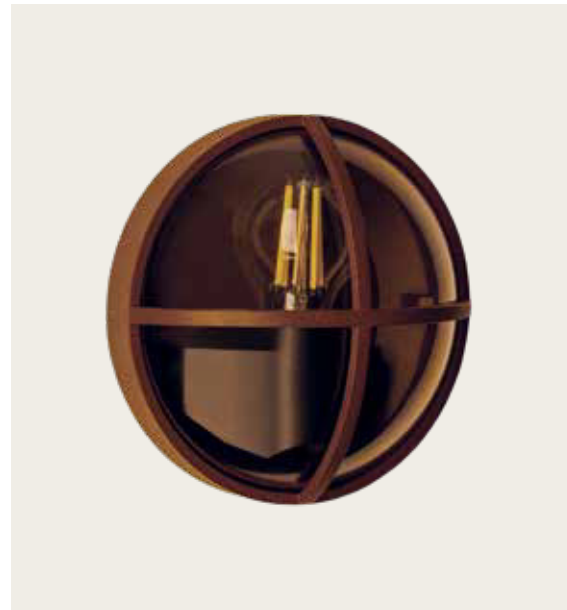


Bulb 1x E27
 Power 15W MAX
 Input 220-240V, 50/60Hz
 IP 65
 Dimensions Ø: 17.7cm L: 9.8cm
 Material Aluminium - PC Diffuser
 Color Dark Brown / **Code E437**

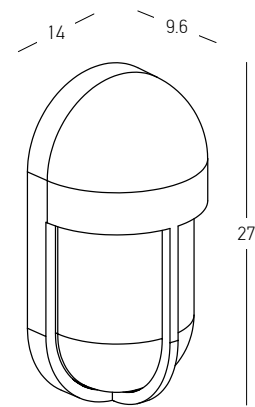


Bulb 1x E27
 Power 15W MAX
 Input 220-240V, 50/60Hz
 IP 65
 Dimensions L: 9.6cm W: 14cm H: 27cm
 Material Aluminium - PC Diffuser
 Color Dark Brown / **Code E438**



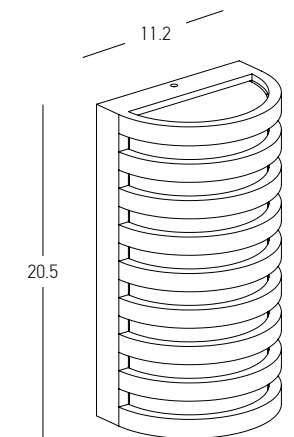


Power 10W
 Input 220-240V, 50/60Hz
 Color Temperature 3000K
 Lumen 929Lm
 Cri 80
 IP 65
 Dimensions L: 8cm W: 11.2cm H: 20.5cm
 Material Aluminium - PC Diffuser
 Color Dark Brown / **Code E341**

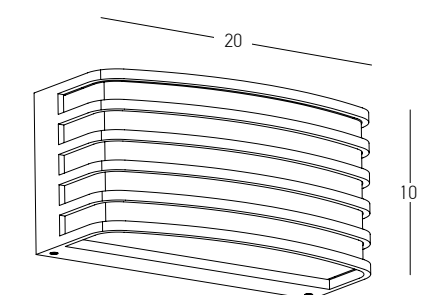


Bulb 1x E27
 Power 20W MAX
 Input 220-240V, 50/60Hz
 IP 54
 Dimensions L: 9cm W: 20cm H: 10cm
 Material Aluminium - PC Diffuser
 Color Dark Brown / **Code E275**



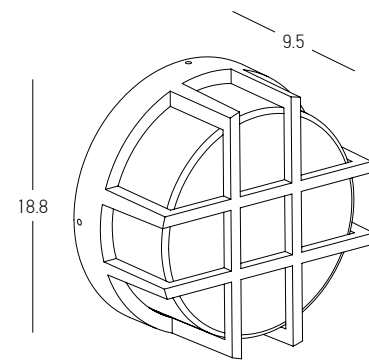


Power 10W
Input 220-240V, 50/60Hz
Color Temperature 3000K
Lumen 880Lm
Cri 80
IP 65
Dimensions Ø: 18.8cm L: 9.5cm
Material Aluminium - PC Diffuser
Color Dark Brown / **Code E342**





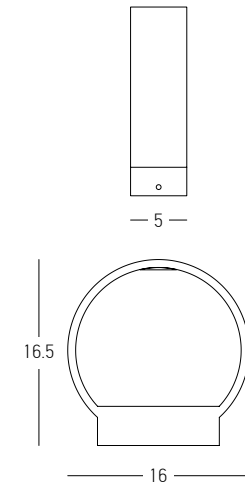


Power 7W
 Input 220-240V, 50/60Hz
 Color Temperature 3000K
 Lumen 530Lm
 Cri 80
 IP 65
 Dimensions L: 16.5cm W: 16cm H: 5cm
 Material Aluminium - Tempered Glass
 Special Feature Up-Down Lighting
 Color Dark Brown / **Code E268**

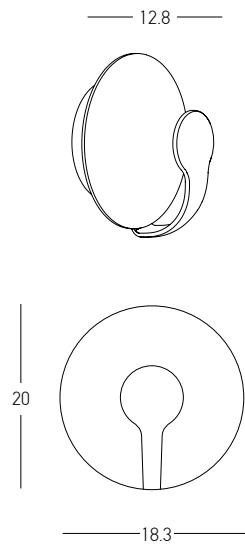


Power 12W
 Input 220-240V, 50/60Hz
 Color Temperature 3000K
 Lumen 880Lm
 Cri 80
 IP 65
 Dimensions L: 12.8cm W: 18.3cm H: 20cm
 Material Aluminium
 Color Dark Brown - Sandy White / **Code E271**

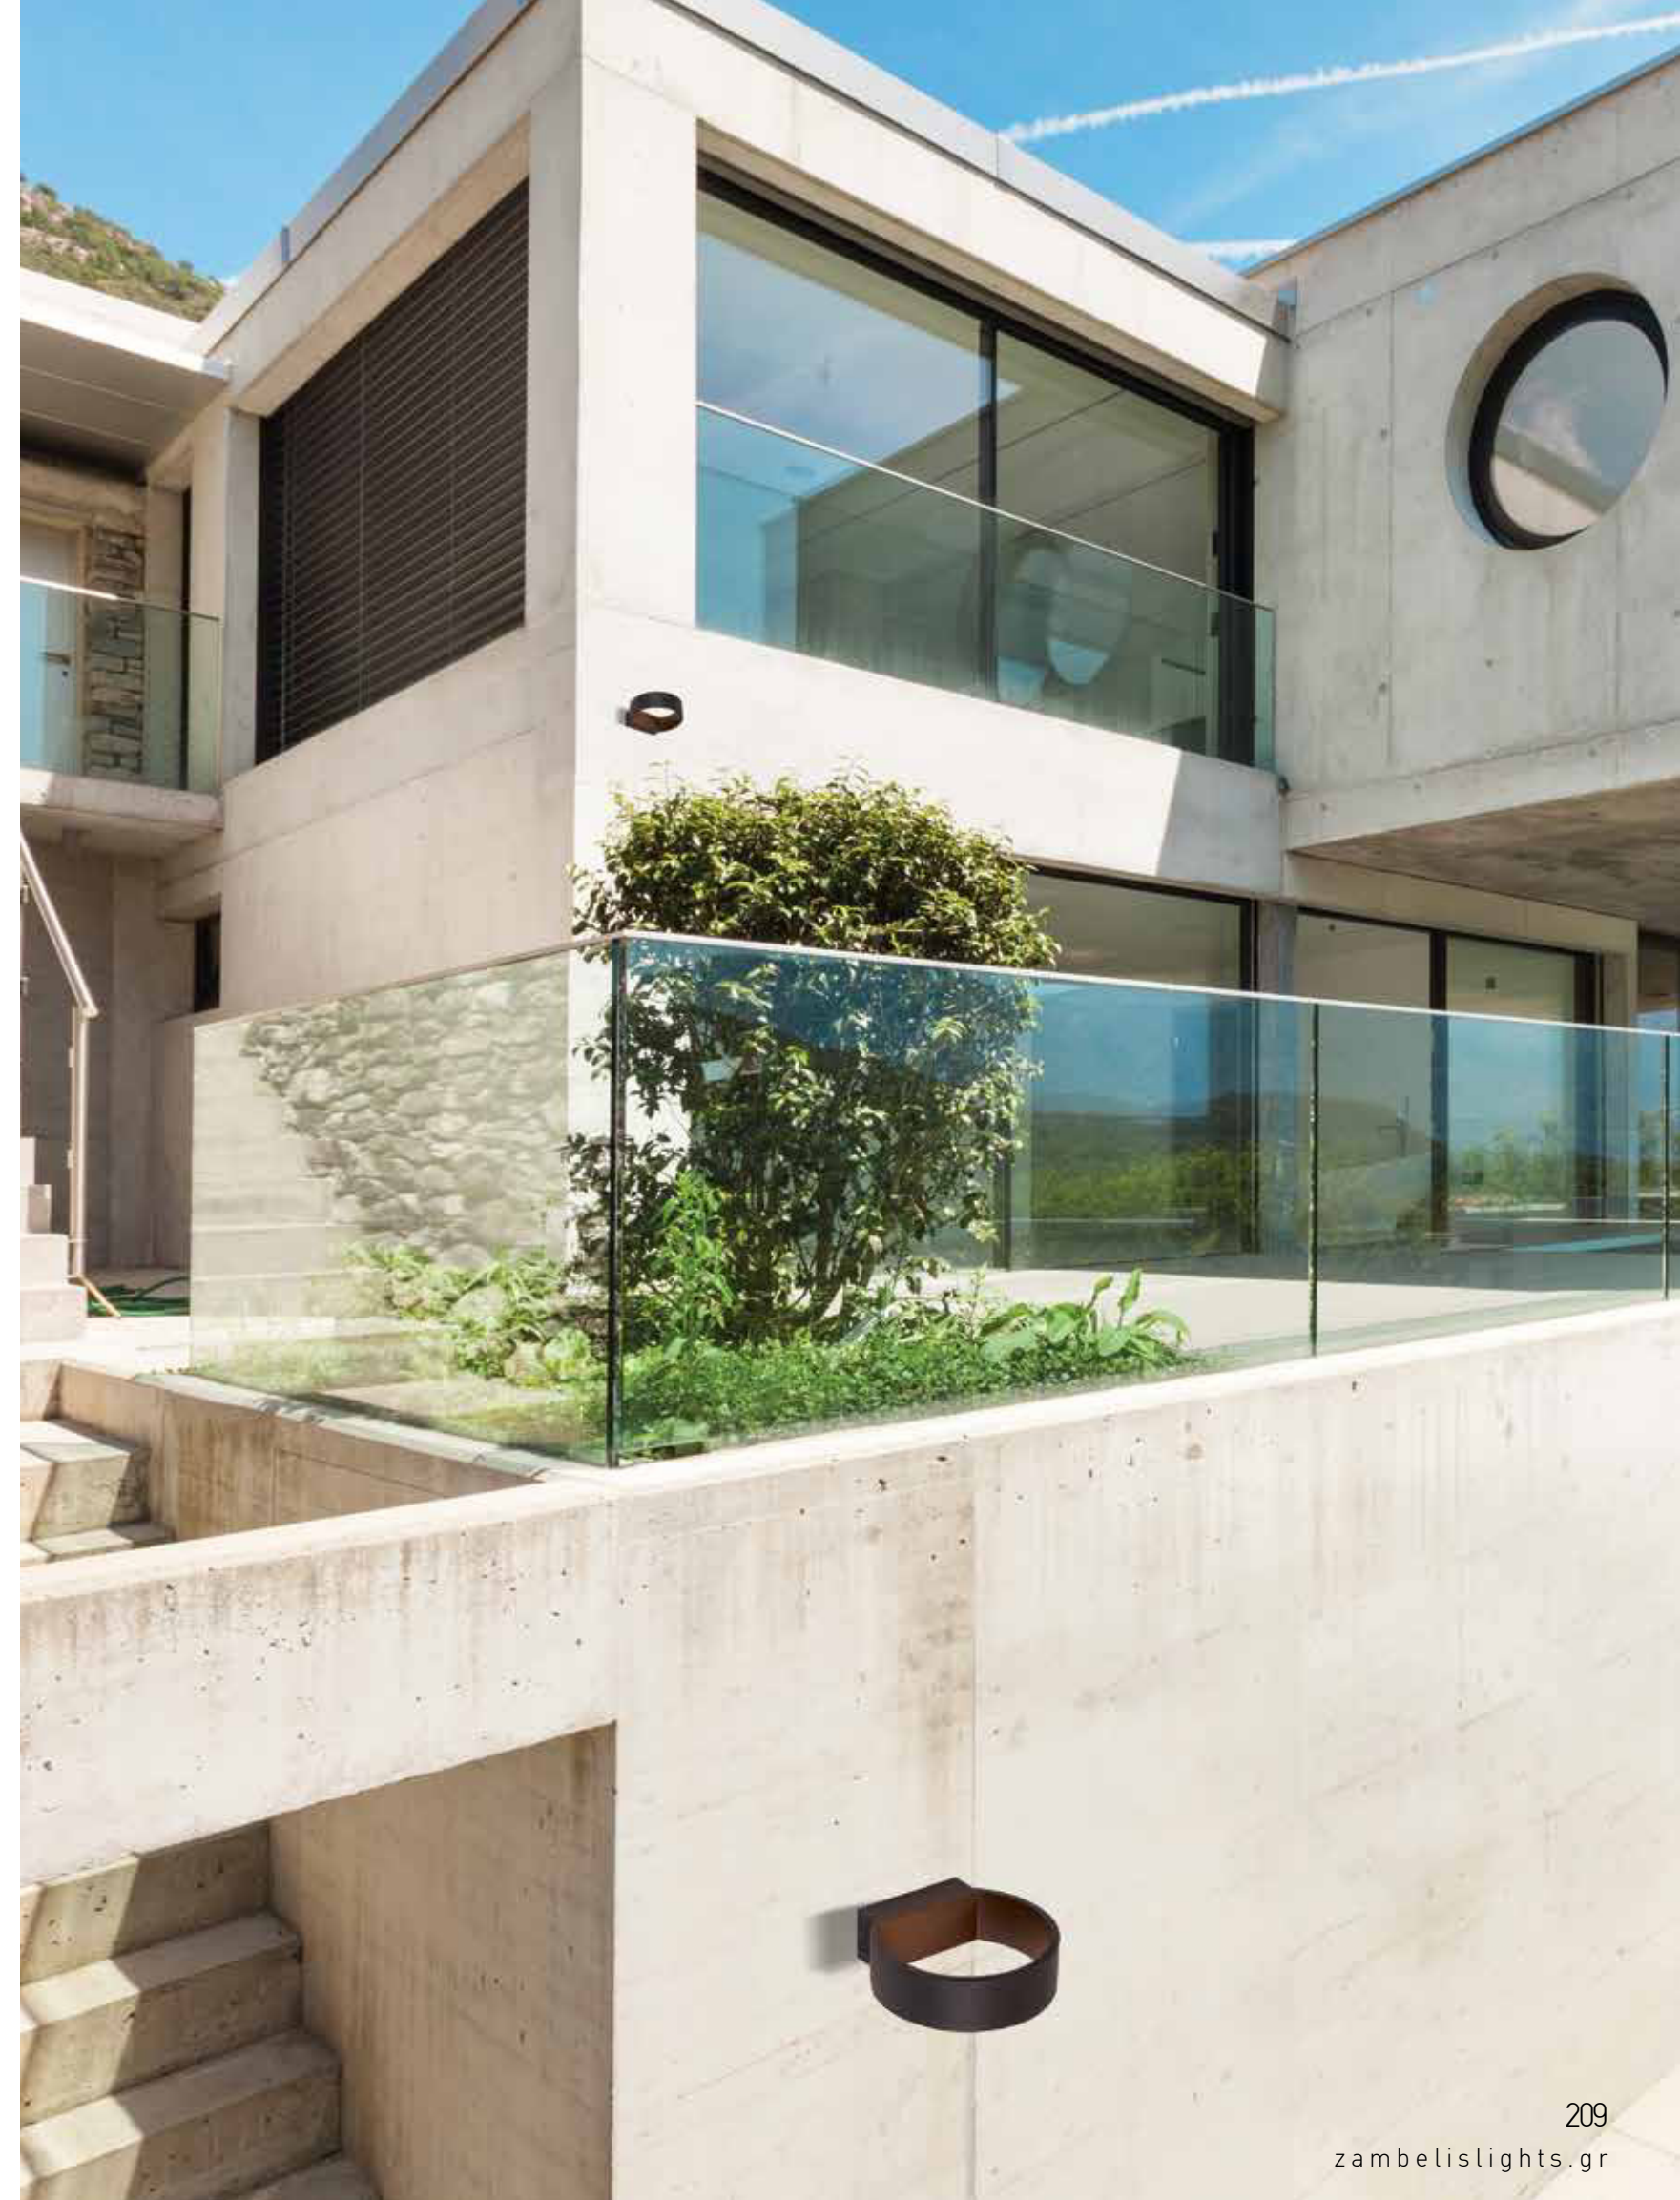

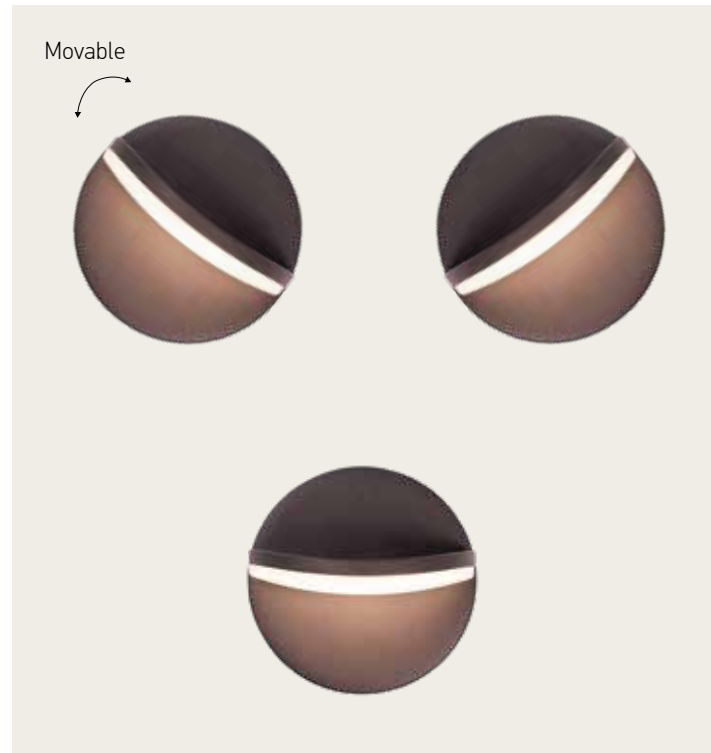


Power 16W
 Input 220-240V, 50/60Hz
 Color Temperature 3000K
 Lumen 1106Lm
 Cri 80
 IP 65
 Dimensions Ø: 18.3cm L: 13cm
 Material Aluminium - Opal PC Diffuser
 Special Feature Movable Light
 Color Dark Brown / **Code E267**



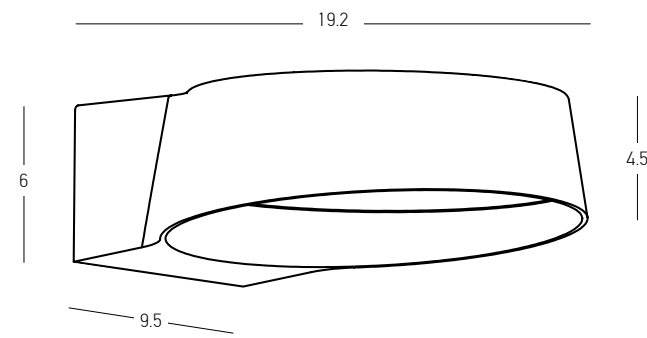


Power 12W
 Input 220-240V, 50/60Hz
 Color Temperature 3000K
 Lumen 1100Lm
 Cri 80
 IP 54
 Dimensions L: 19.2cm W: 16.2cm H: 6cm
 Beam Angle 120°
 Material Aluminium - Clear Glass
 Color Graphite / **Code E464**




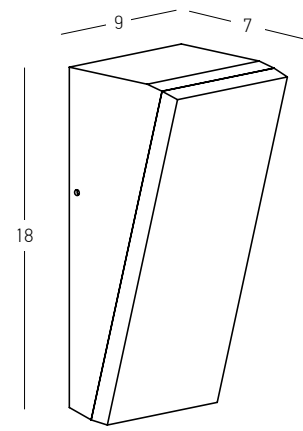


Power 10W
 Input 220-240V, 50/60Hz
 Color Temperature 3000K
 Lumen 1115Lm
 Cri 80
 IP 65
 Dimensions L: 7cm W: 9cm H: 18cm
 Material Aluminium - Opal PC Diffuser
 Color Graphite / **Code E416**

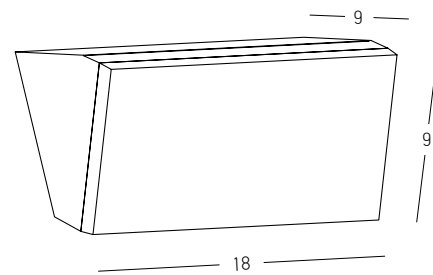


Power 10W
 Input 220-240V, 50/60Hz
 Color Temperature 3000K
 Lumen 1115Lm
 Cri 80
 IP 65
 Dimensions L: 9cm W: 18cm H: 9cm
 Material Aluminium - Opal PC Diffuser
 Color Graphite / **Code E417**

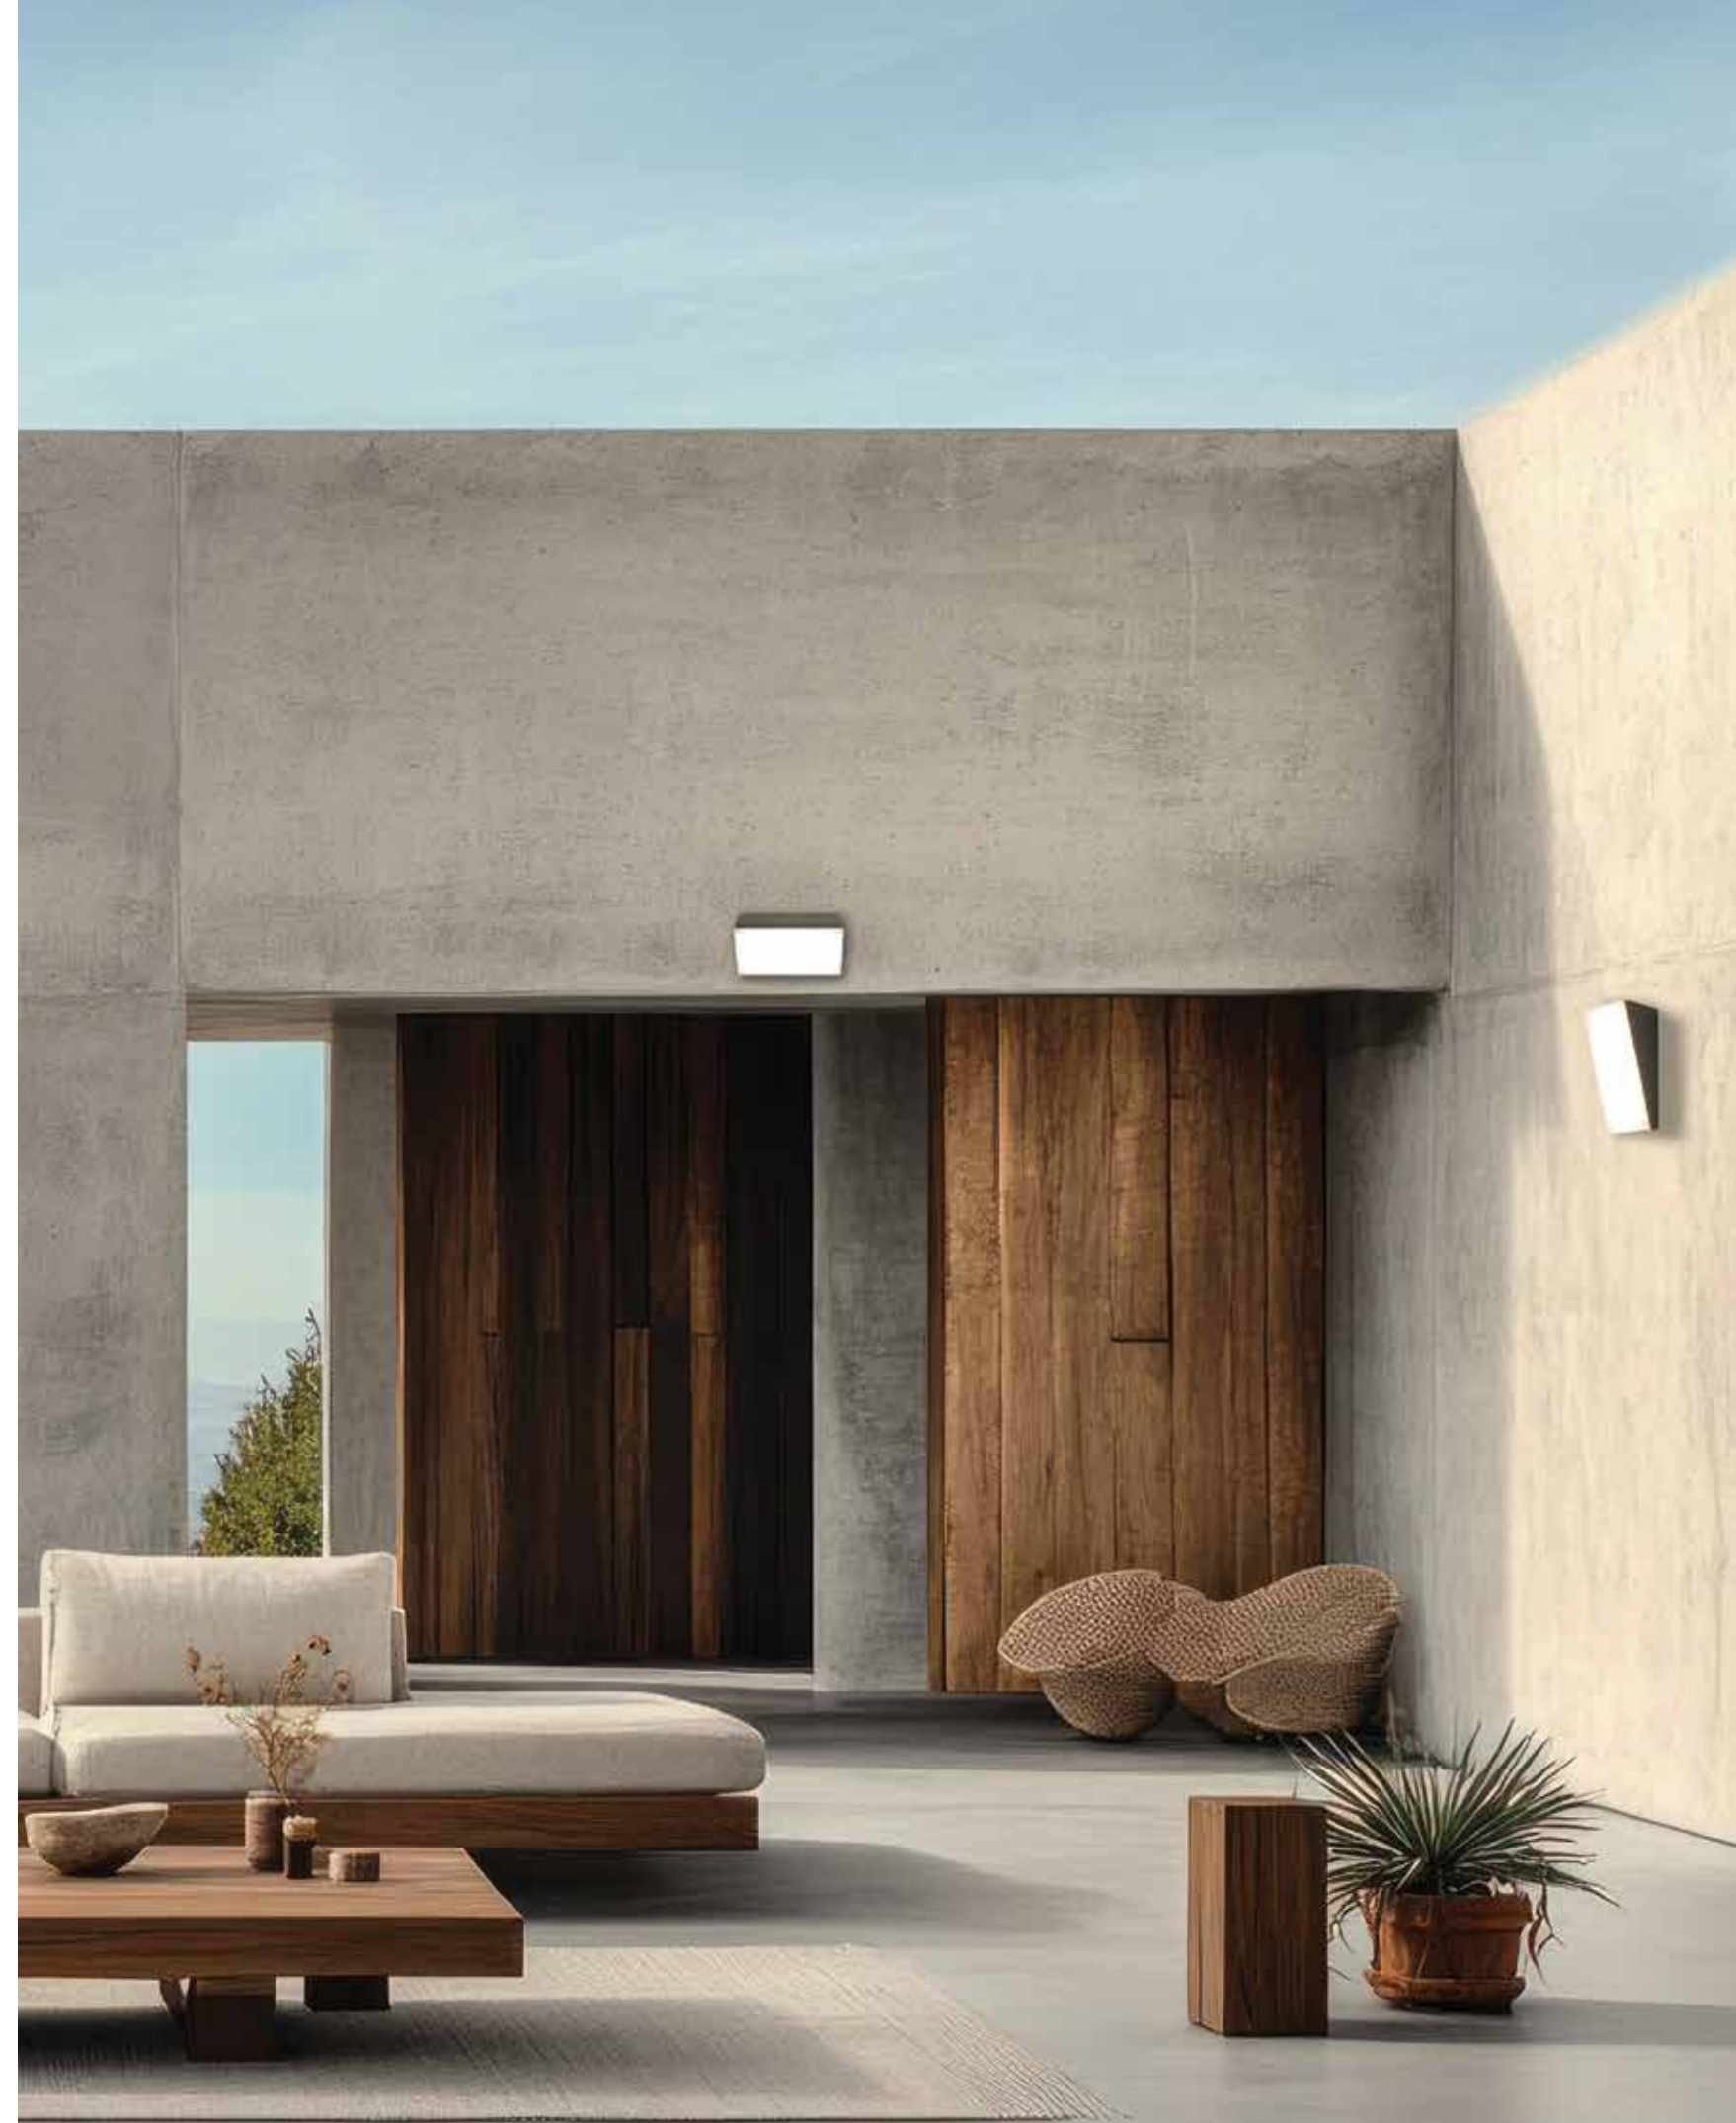

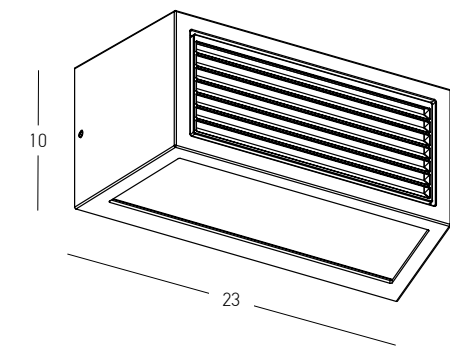


Bulb	1x E27
Power	15W MAX
Input	220-240V, 50/60Hz
IP	54
Dimensions	L: 9.5cm W: 23cm H: 10cm
Material	Aluminium - PC Diffuser
Special Feature	Up-Down Lighting
Color	Graphite / Code E500




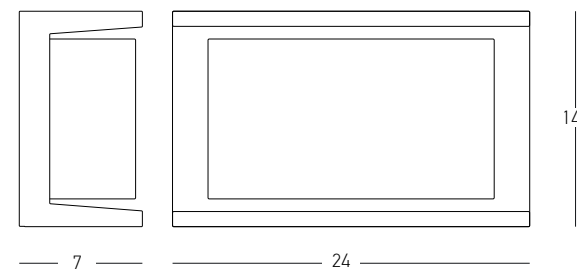


Bulb 1x E27
 Power 18W MAX
 Input 220-240V, 50/60Hz
 IP 54
 Dimensions L: 7cm W: 24cm H: 14cm
 Material Aluminium - PC Diffuser
 Color Graphite / **Code E149**

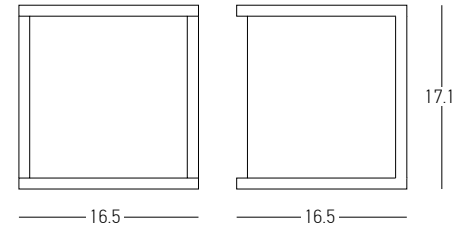


Bulb 1x E27
 Power 18W MAX
 Input 220-240V, 50/60Hz
 IP 54
 Dimensions L: 16.5cm W: 16.5cm H: 17.1cm
 Material Aluminium - PC Diffuser
 Color Graphite / **Code E127**

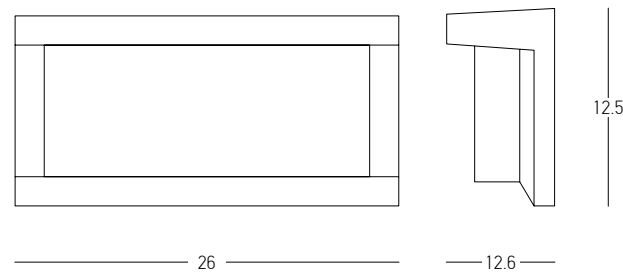




Bulb 1x E27
 Power 18W MAX
 Input 220-240V, 50/60Hz
 IP 54
 Dimensions L: 12.6cm W: 26cm H: 12.5cm
 Material Aluminium - PC Diffuser
 Color Graphite / **Code E128**

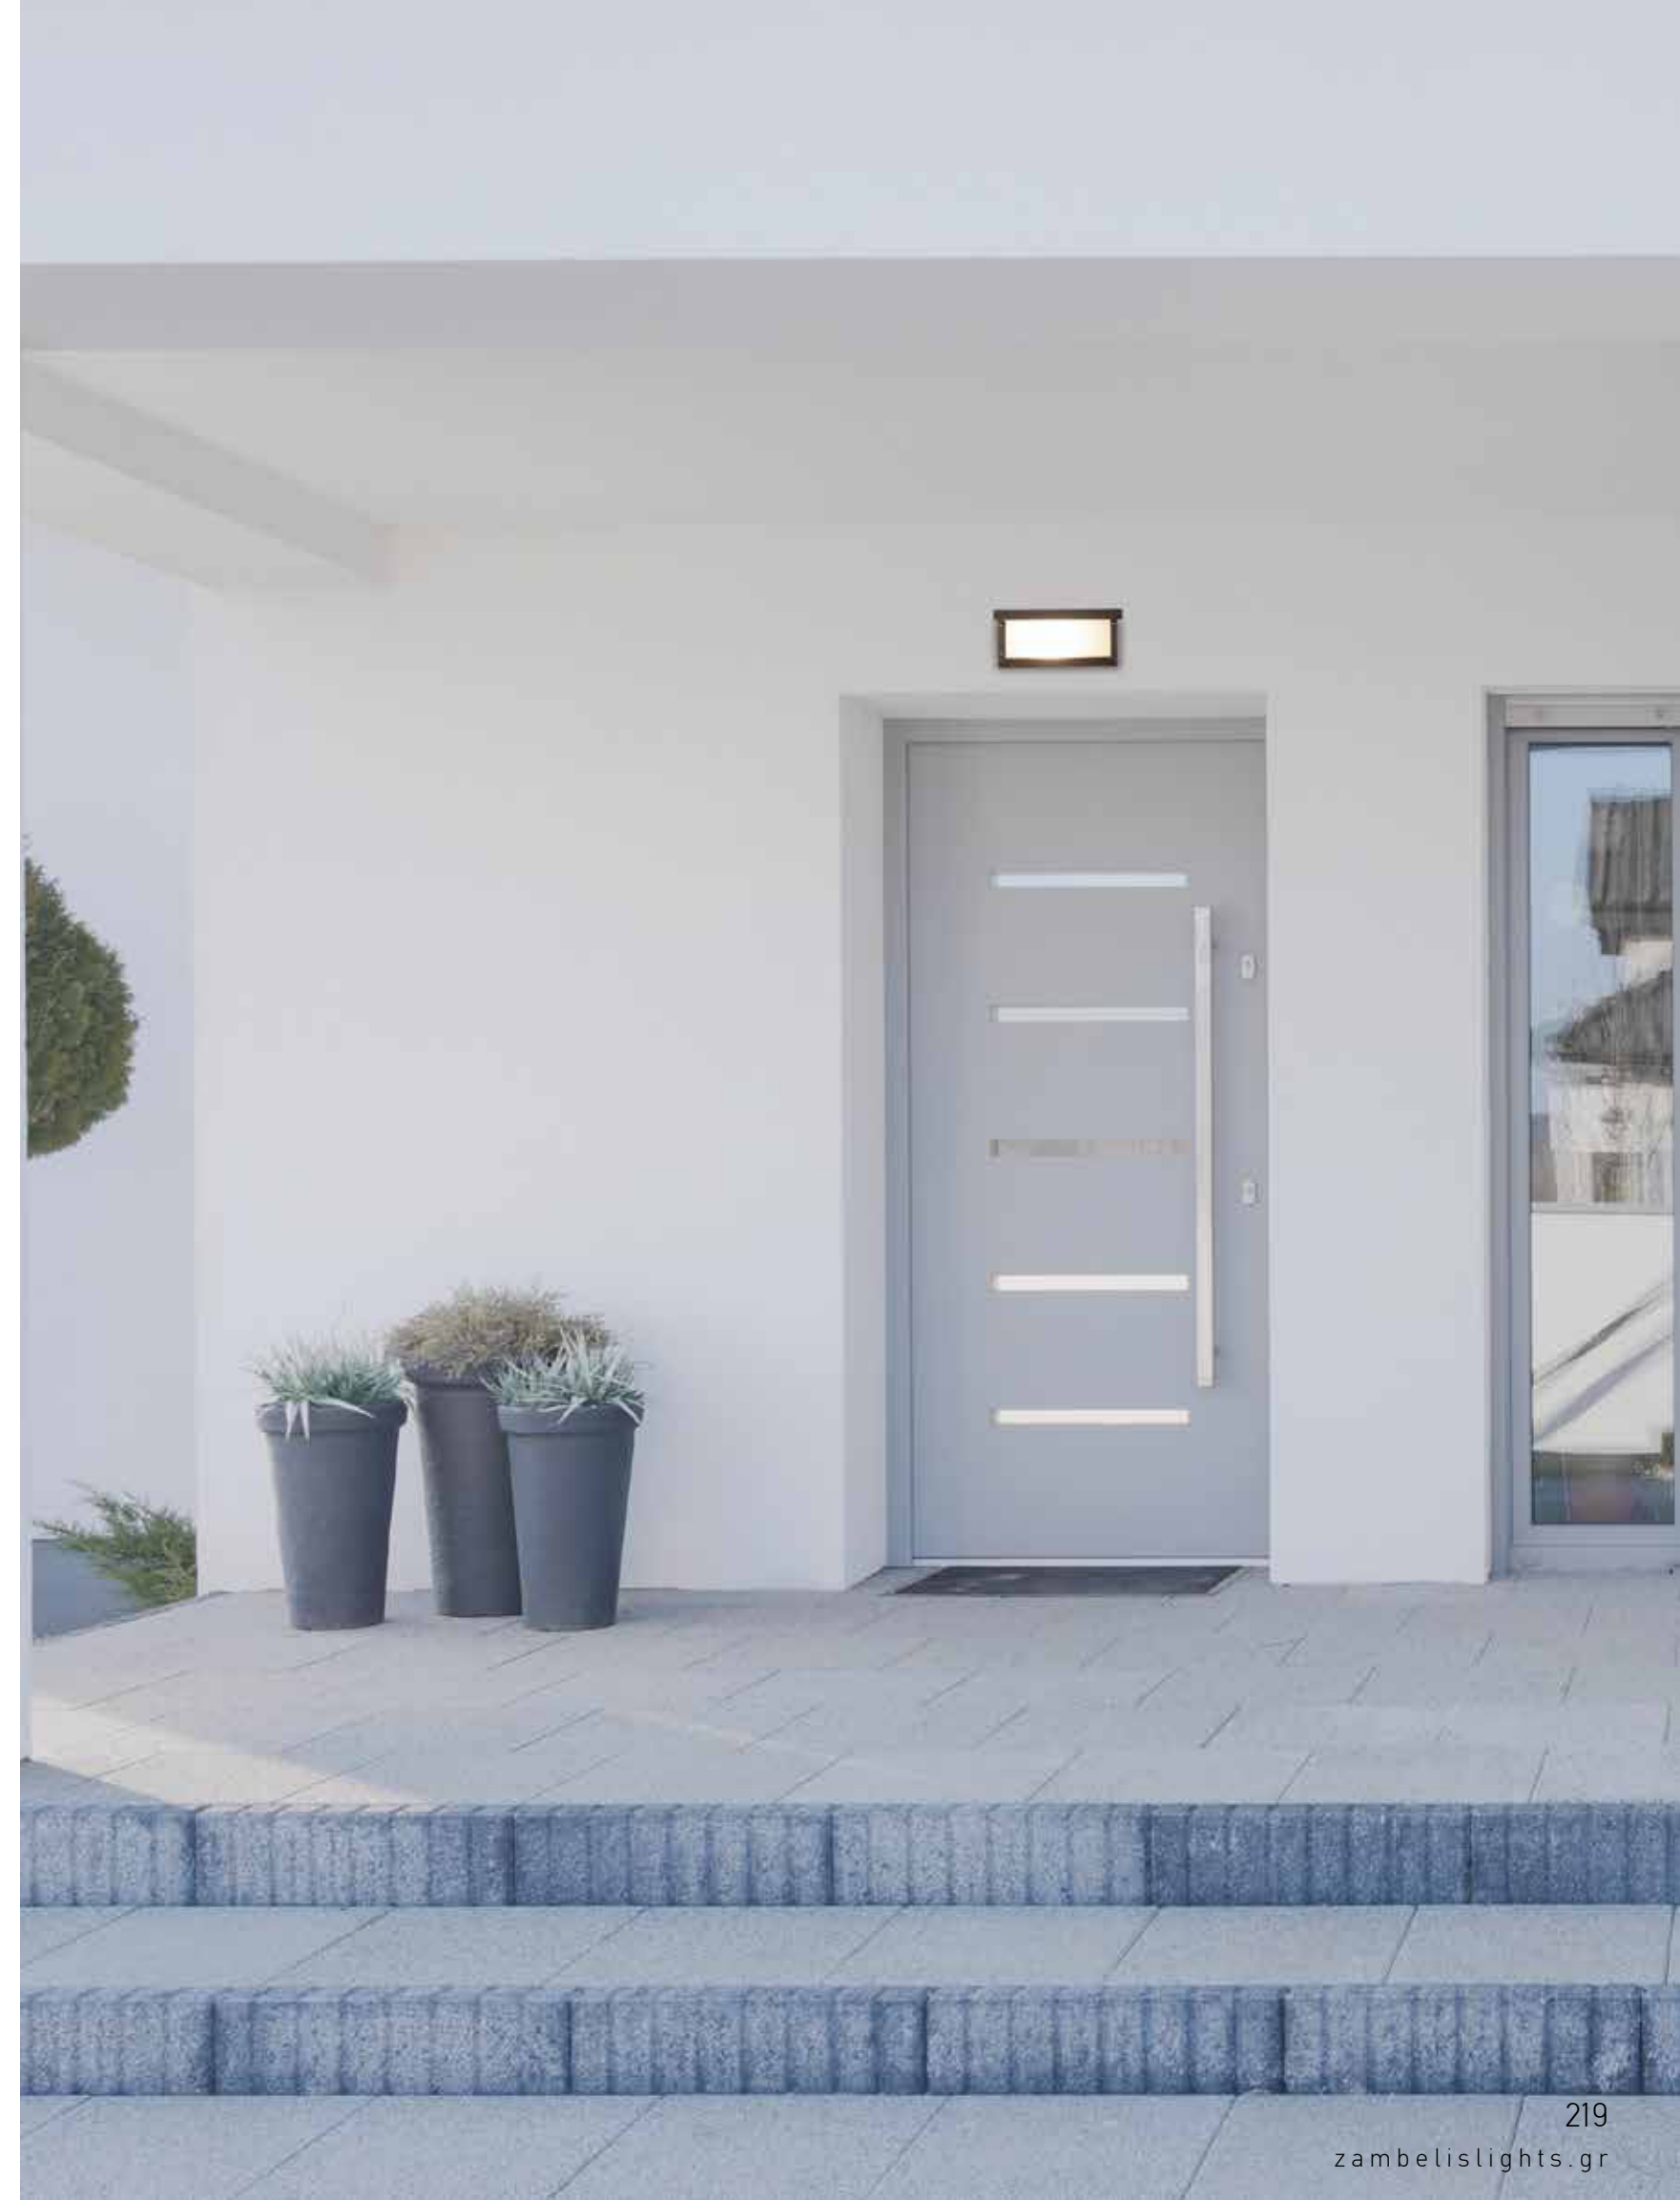

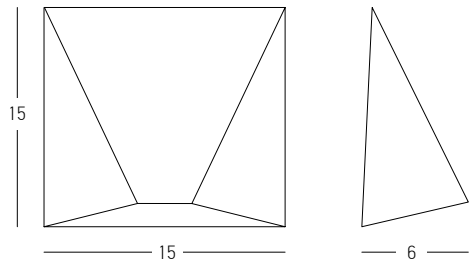


Power 7W
Input 220-240V, 50/60Hz
Color Temperature 3000K
Lumen 480Lm
Cri 80
IP 54
Dimensions L: 6cm W: 15cm H: 15cm
Material Aluminium - Glass
Color Graphite / **Code E243**

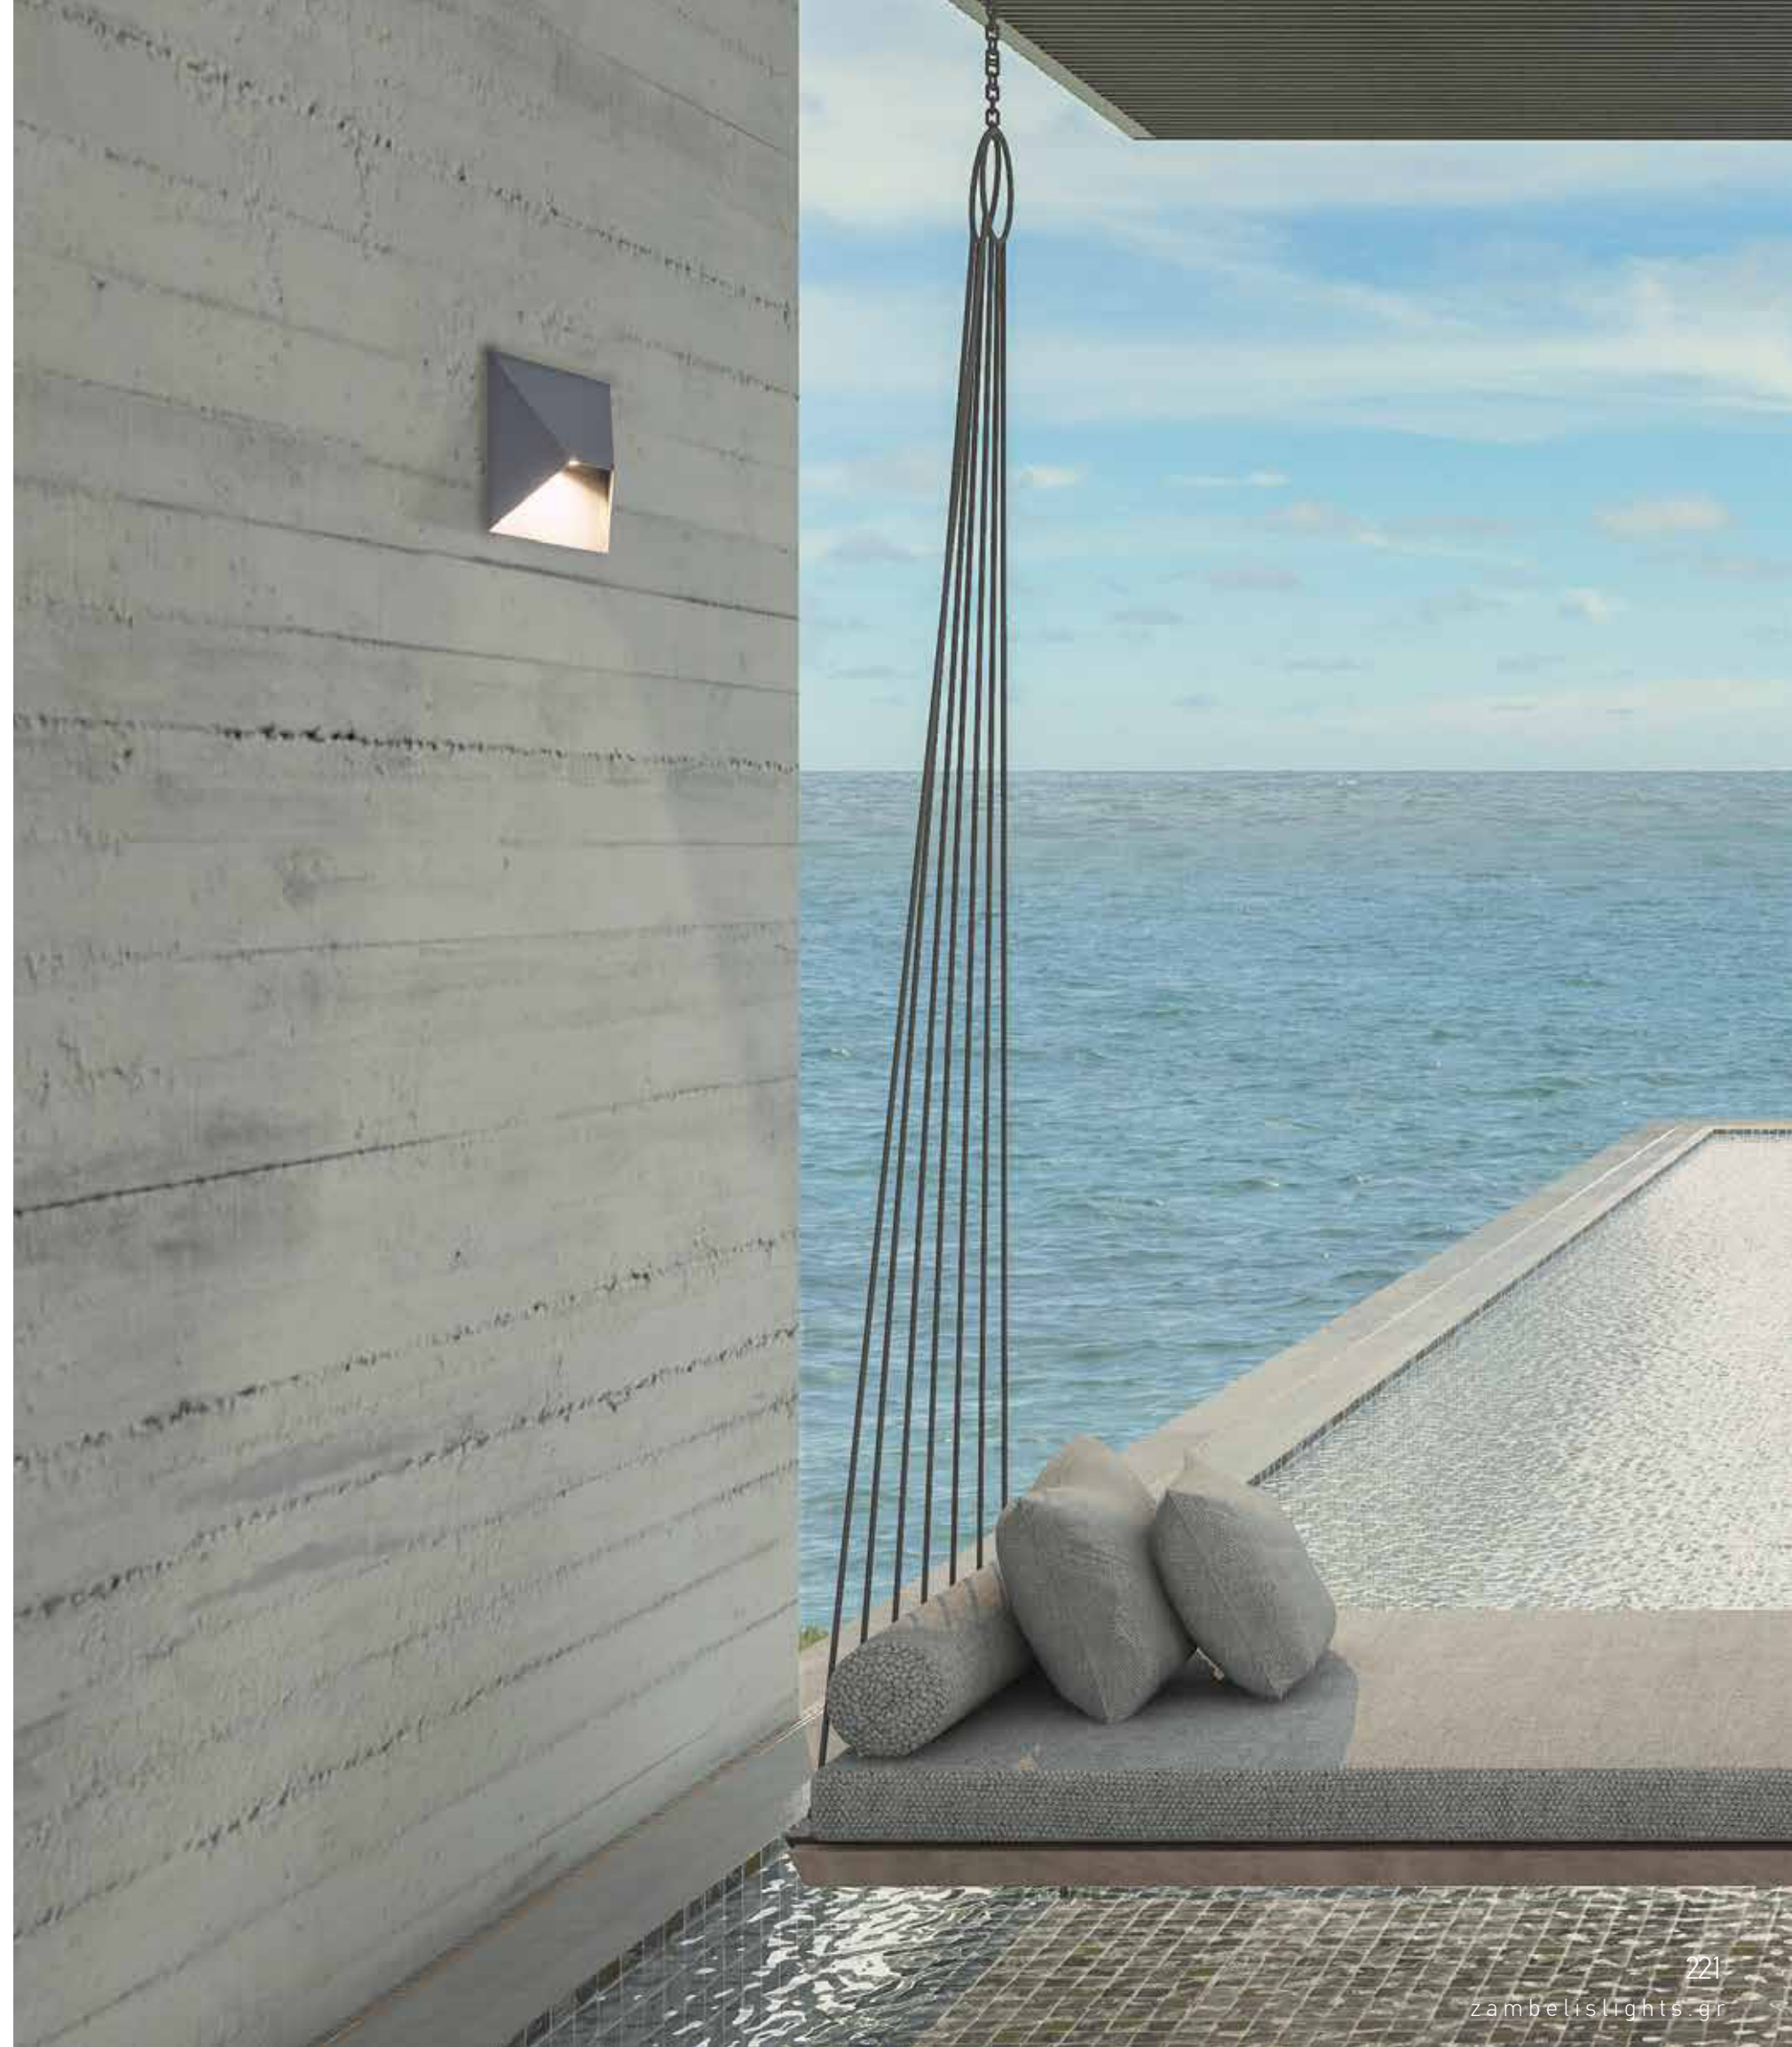

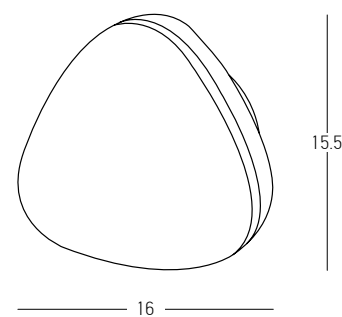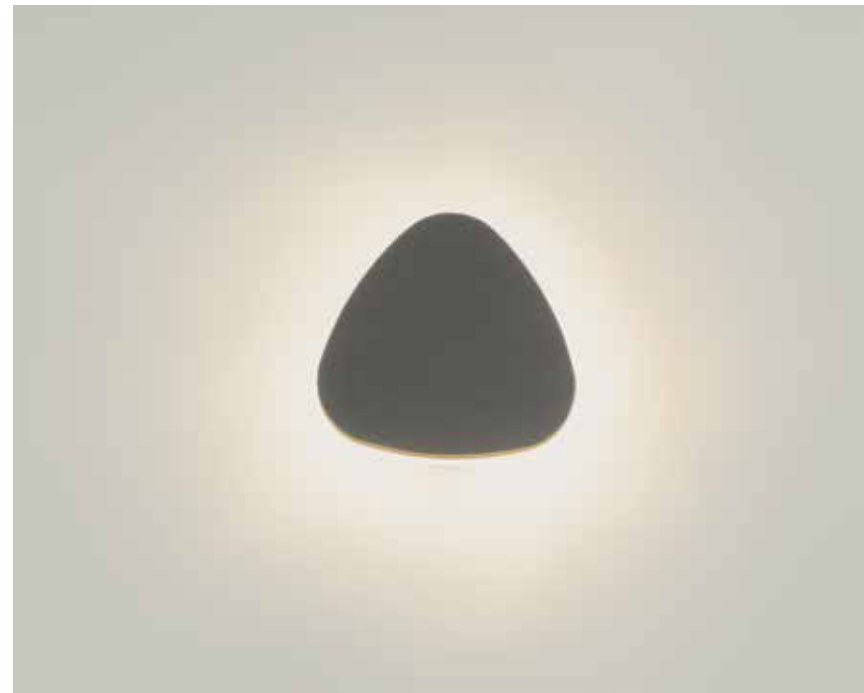


Power 10W
 Input 220-240V, 50/60Hz
 Color Temperature 3000K
 Lumen 810Lm
 Cri 80
 IP 65
 Dimensions L: 7.2cm W: 16cm H: 15.5cm
 Material Aluminium - PC Diffuser
 Color Graphite / **Code E195**

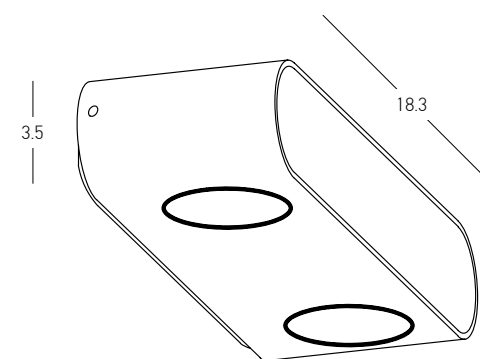


Power 10W
 Input 220-240V, 50/60Hz
 Color Temperature 3000K
 Lumen 775Lm
 Cri 90
 IP 54
 Dimensions L: 6.5cm W: 18.3cm H: 3.5cm
 Material Aluminium - Tempered Glass
 Special Feature Up-Down Lighting
 Color Graphite / **Code E315**







Power 8W
 Input 220-240V, 50/60Hz
 Color Temperature 3000K
 Lumen 336Lm
 Cri 80
 IP 65
 Dimensions L: 6cm W: 11cm H: 11cm
 Material Aluminium - Tempered Glass
 Color Graphite / **Code E197**

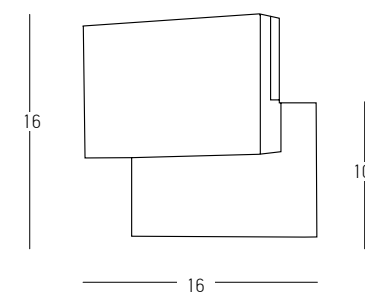


Power 10W
 Input 220-240V, 50/60Hz
 Color Temperature 3000K
 Lumen 810Lm
 Cri 80
 IP 65
 Dimensions L: 7.8cm W: 16cm H: 10-16cm
 Material Aluminium - PC Diffuser
 Special Feature Movable
 Color Graphite / **Code E199**

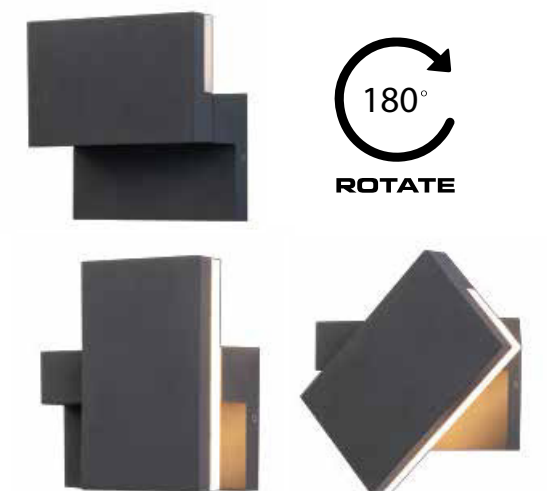


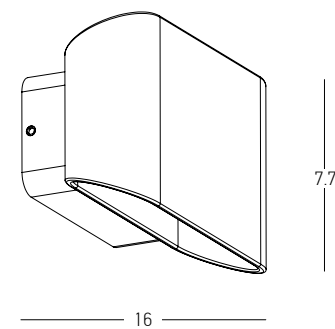


Power 11W
 Input 220-240V, 50/60Hz
 Color Temperature 3000K
 Lumen 900Lm
 Cri 80
 IP 54
 Dimensions L: 10cm W: 16cm H: 7.7cm
 Material Aluminium - PC Diffuser
 Special Feature Up-Down Lighting
 Color Graphite / **Code E274**

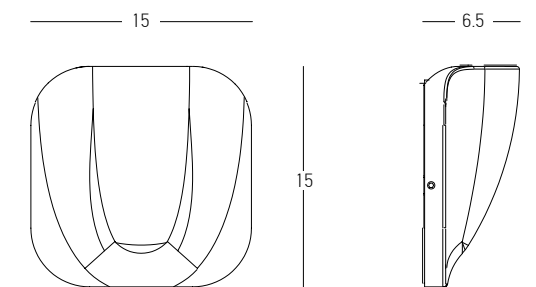


Power 9W
 Input 220-240V, 50/60Hz
 Color Temperature 3000K
 Lumen 572Lm
 Cri 80
 IP 54
 Dimensions L: 6.5cm W: 15cm H: 15cm
 Beam Angle 45°
 Material Aluminium - Tempered Glass
 Color Graphite / **Code E273**




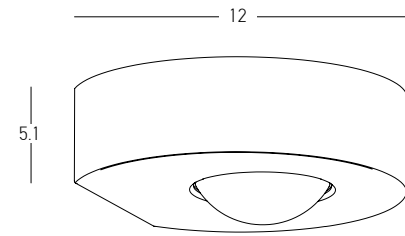


Power 9W
 Input 220-240V, 50/60Hz
 Color Temperature 3000K
 Lumen 752Lm
 Cri 80
 IP 54
 Dimensions L: 12cm W: 13cm H: 5.1cm
 Beam Angle 120°
 Material Aluminium - PC Diffuser
 Color Graphite / **Code E278**

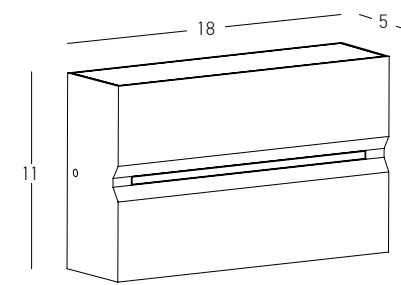

Power 15W
 Input 220-240V, 50/60Hz
 Color Temperature 3000K
 Lumen 796Lm
 Cri 80
 IP 54
 Dimensions L: 5cm W: 18cm H: 11cm
 Beam Angle 30°
 Material Aluminium - Tempered Glass - PC Diffuser
 Special Feature Up - Down - Front Lighting
 12x SMD LED
 Color Graphite / **Code E272**



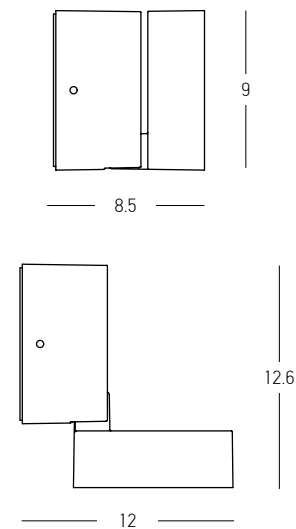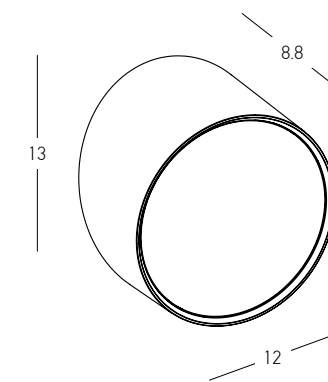


Power 7W
 Input 220-240V, 50/60Hz
 Color Temperature 3000K
 Lumen 518Lm
 Cri 80
 IP 65
 Dimensions Ø: 12cm L: 8.8cm H: 13cm
 Beam Angle 120°
 Material Aluminium - Tempered Glass
 Color Sandy Black / **Code E436**





Power 6W
 Input 220-240V, 50/60Hz
 Color Temperature 3000K
 Lumen 672Lm
 Cri 80
 IP 65
 Dimensions Closed Ø: 9cm L: 8.5cm
 Dimensions Open L: 12cm W: 9cm H: 12.6cm
 Beam Angle 120°
 Material Aluminium - PC Diffuser
 Special Feature 90° Movable Head
 Color Sandy Black / **Code E435**



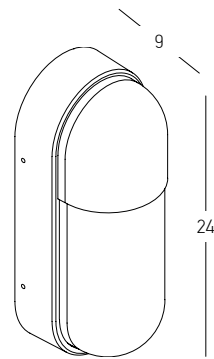



Power 10W
Input 220-240V, 50/60Hz
Color Temperature 3000K
Lumen 498Lm
Cri 80
IP 54
Dimensions L: 9cm W: 9.5cm H: 24cm
Material Aluminium - PC Diffuser
Color Black / Code E318



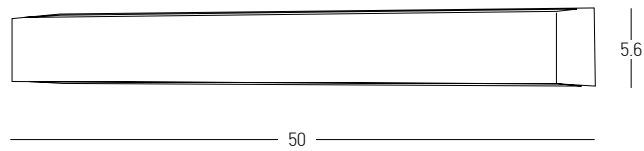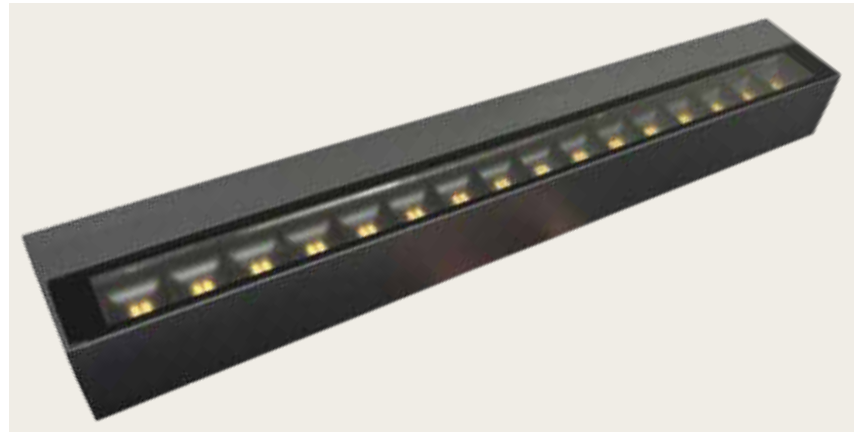


Power 30W
 Input 220-240V, 50/60Hz
 Color Temperature 3000K
 Lumen 2263Lm
 Cri 80
 IP 65
 Dimensions L: 7.8cm W: 50cm H: 5.6cm
 Material Aluminium - PC Diffuser
 Special Feature Up-Down Lighting
 Clear Microprismatic Diffuser
 Color Graphite / **Code E227**

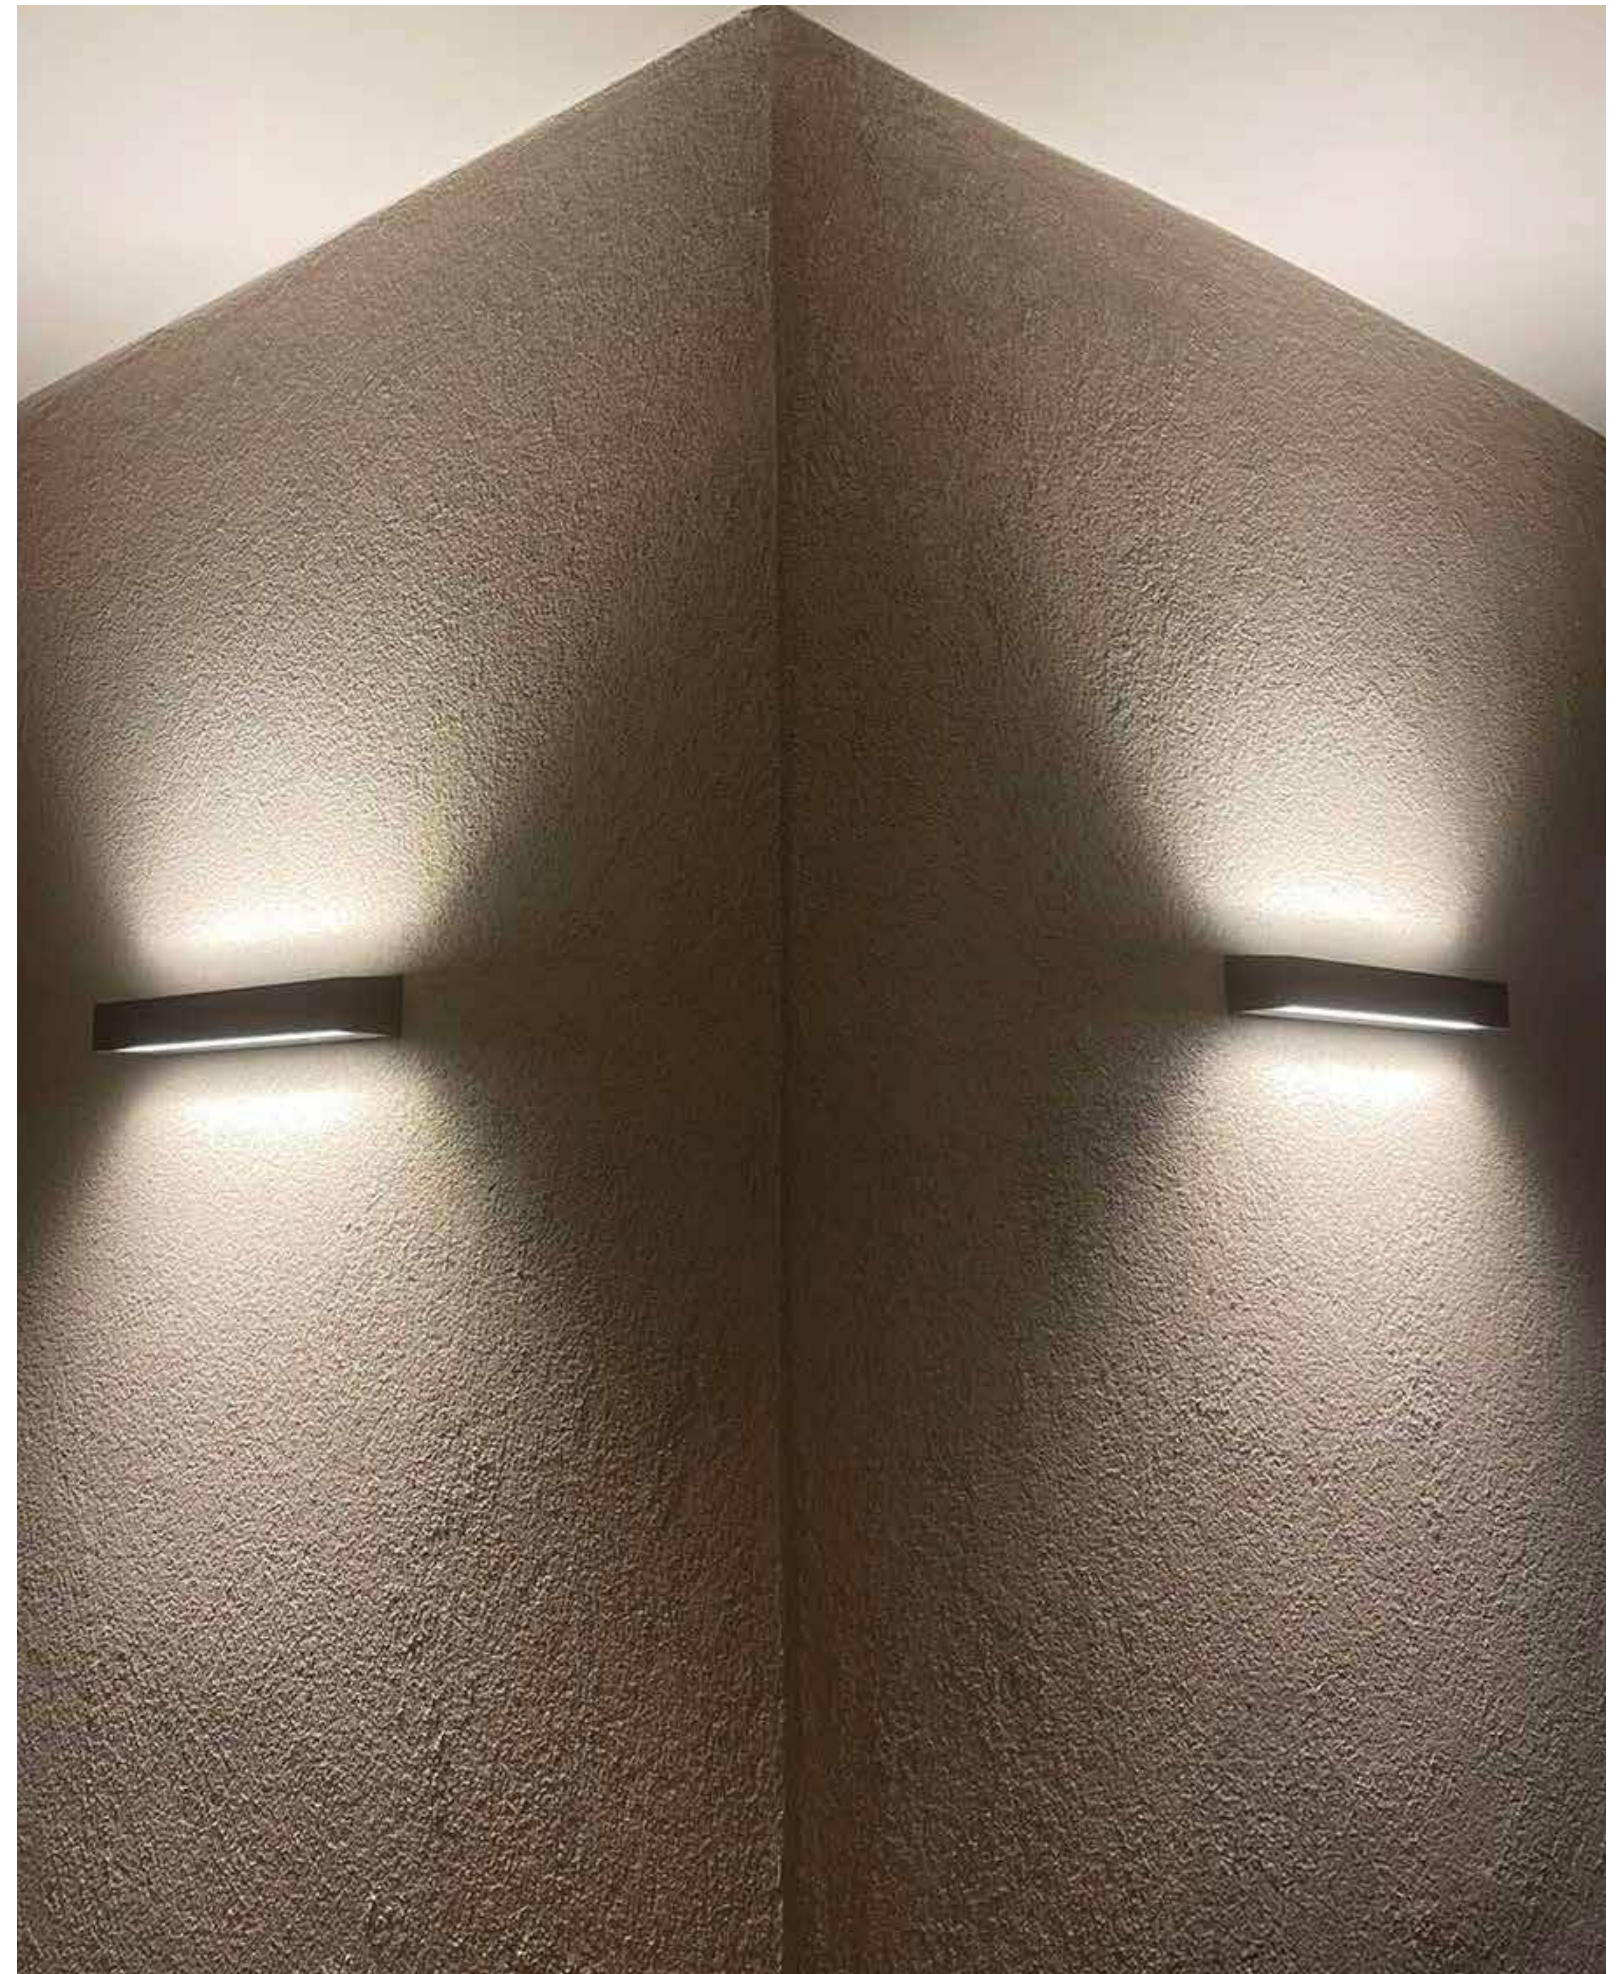


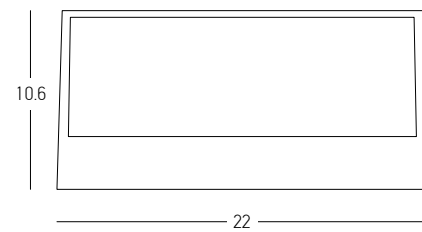


Power 2x 13.5W
 Input 220-240V, 50/60Hz
 Color Temperature 3000K
 Lumen 1359Lm
 Cri 80
 IP 65
 Dimensions L: 10.6cm W: 22cm H: 9cm
 Material Aluminium - Tempered Glass
 Special Feature Up-Down Lighting
 Color Dark Grey / **Code E261**
 Color Dark Brown / **Code E262**

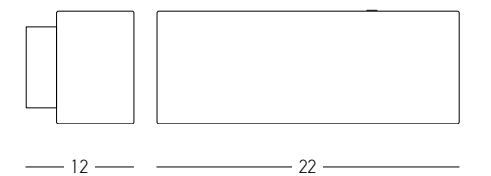


Bulb 1x E27
 Power 18W MAX
 Input 220-240V, 50/60Hz
 IP 44
 Dimensions L: 12cm W: 22cm H: 9cm
 Material Aluminium - Tempered Glass
 Special Feature Up-Down Lighting
 Color Graphite / **Code E146**

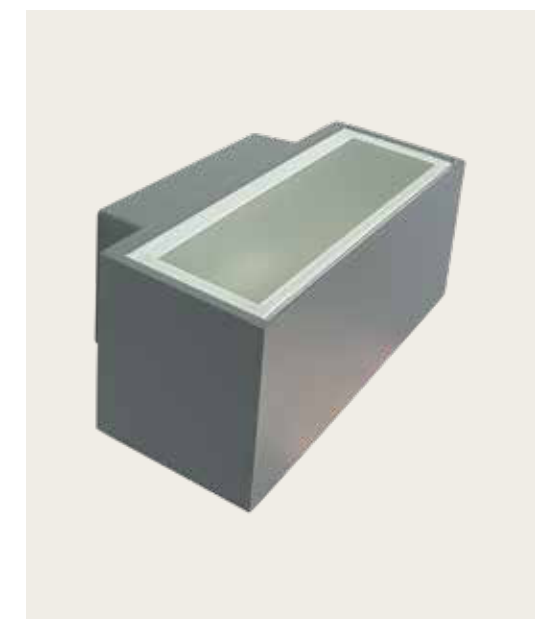

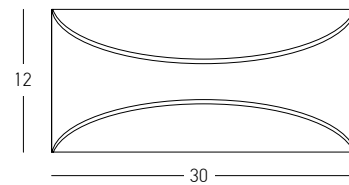


Power 11W
 Input 220-240V, 50/60Hz
 Color Temperature 3000K
 Lumen 640Lm
 Cri 80
 IP 65
 Dimensions L: 9.6cm W: 30cm H: 12cm
 Material Aluminium - Opal PC Diffuser
 Special Feature Up-Down Lighting
 Color Dark Grey / **Code E265**
 Color Dark Brown / **Code E266**




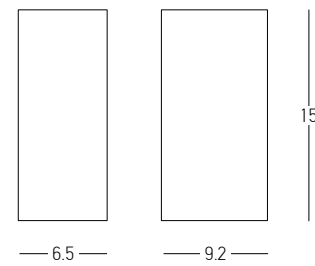


Bulb 2x GU10
 Power 15W MAX
 Input 220-240V, 50/60Hz
 IP 54
 Dimensions L: 9.2cm W: 6.5cm H: 15cm
 Material Aluminium - Tempered Glass
 Special Feature Up-Down Lighting
 Color Graphite / **Code E124**




Bulb 1x GU10
 Power 15W MAX
 Input 220-240V, 50/60Hz
 IP 54
 Dimensions L: 9.2cm W: 6.5cm H: 9cm
 Material Aluminium - Tempered Glass
 Color Graphite / **Code E123**

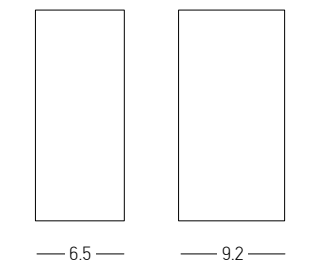


Bulb 2x GU10
 Power 15W MAX
 Input 220-240V, 50/60Hz
 IP 54
 Dimensions L: 9.2cm W: 6.5cm H: 15cm
 Material Aluminium - Tempered Glass
 Special Feature Up-Down Lighting
 Color Graphite / **Code E122**

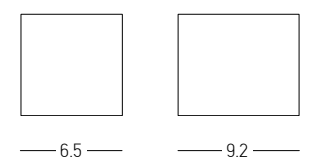


Bulb 1x GU10
 Power 15W MAX
 Input 220-240V, 50/60Hz
 IP 54
 Dimensions L: 9.2cm W: 6.5cm H: 9cm
 Material Aluminium - Tempered Glass
 Color Graphite / **Code E121**

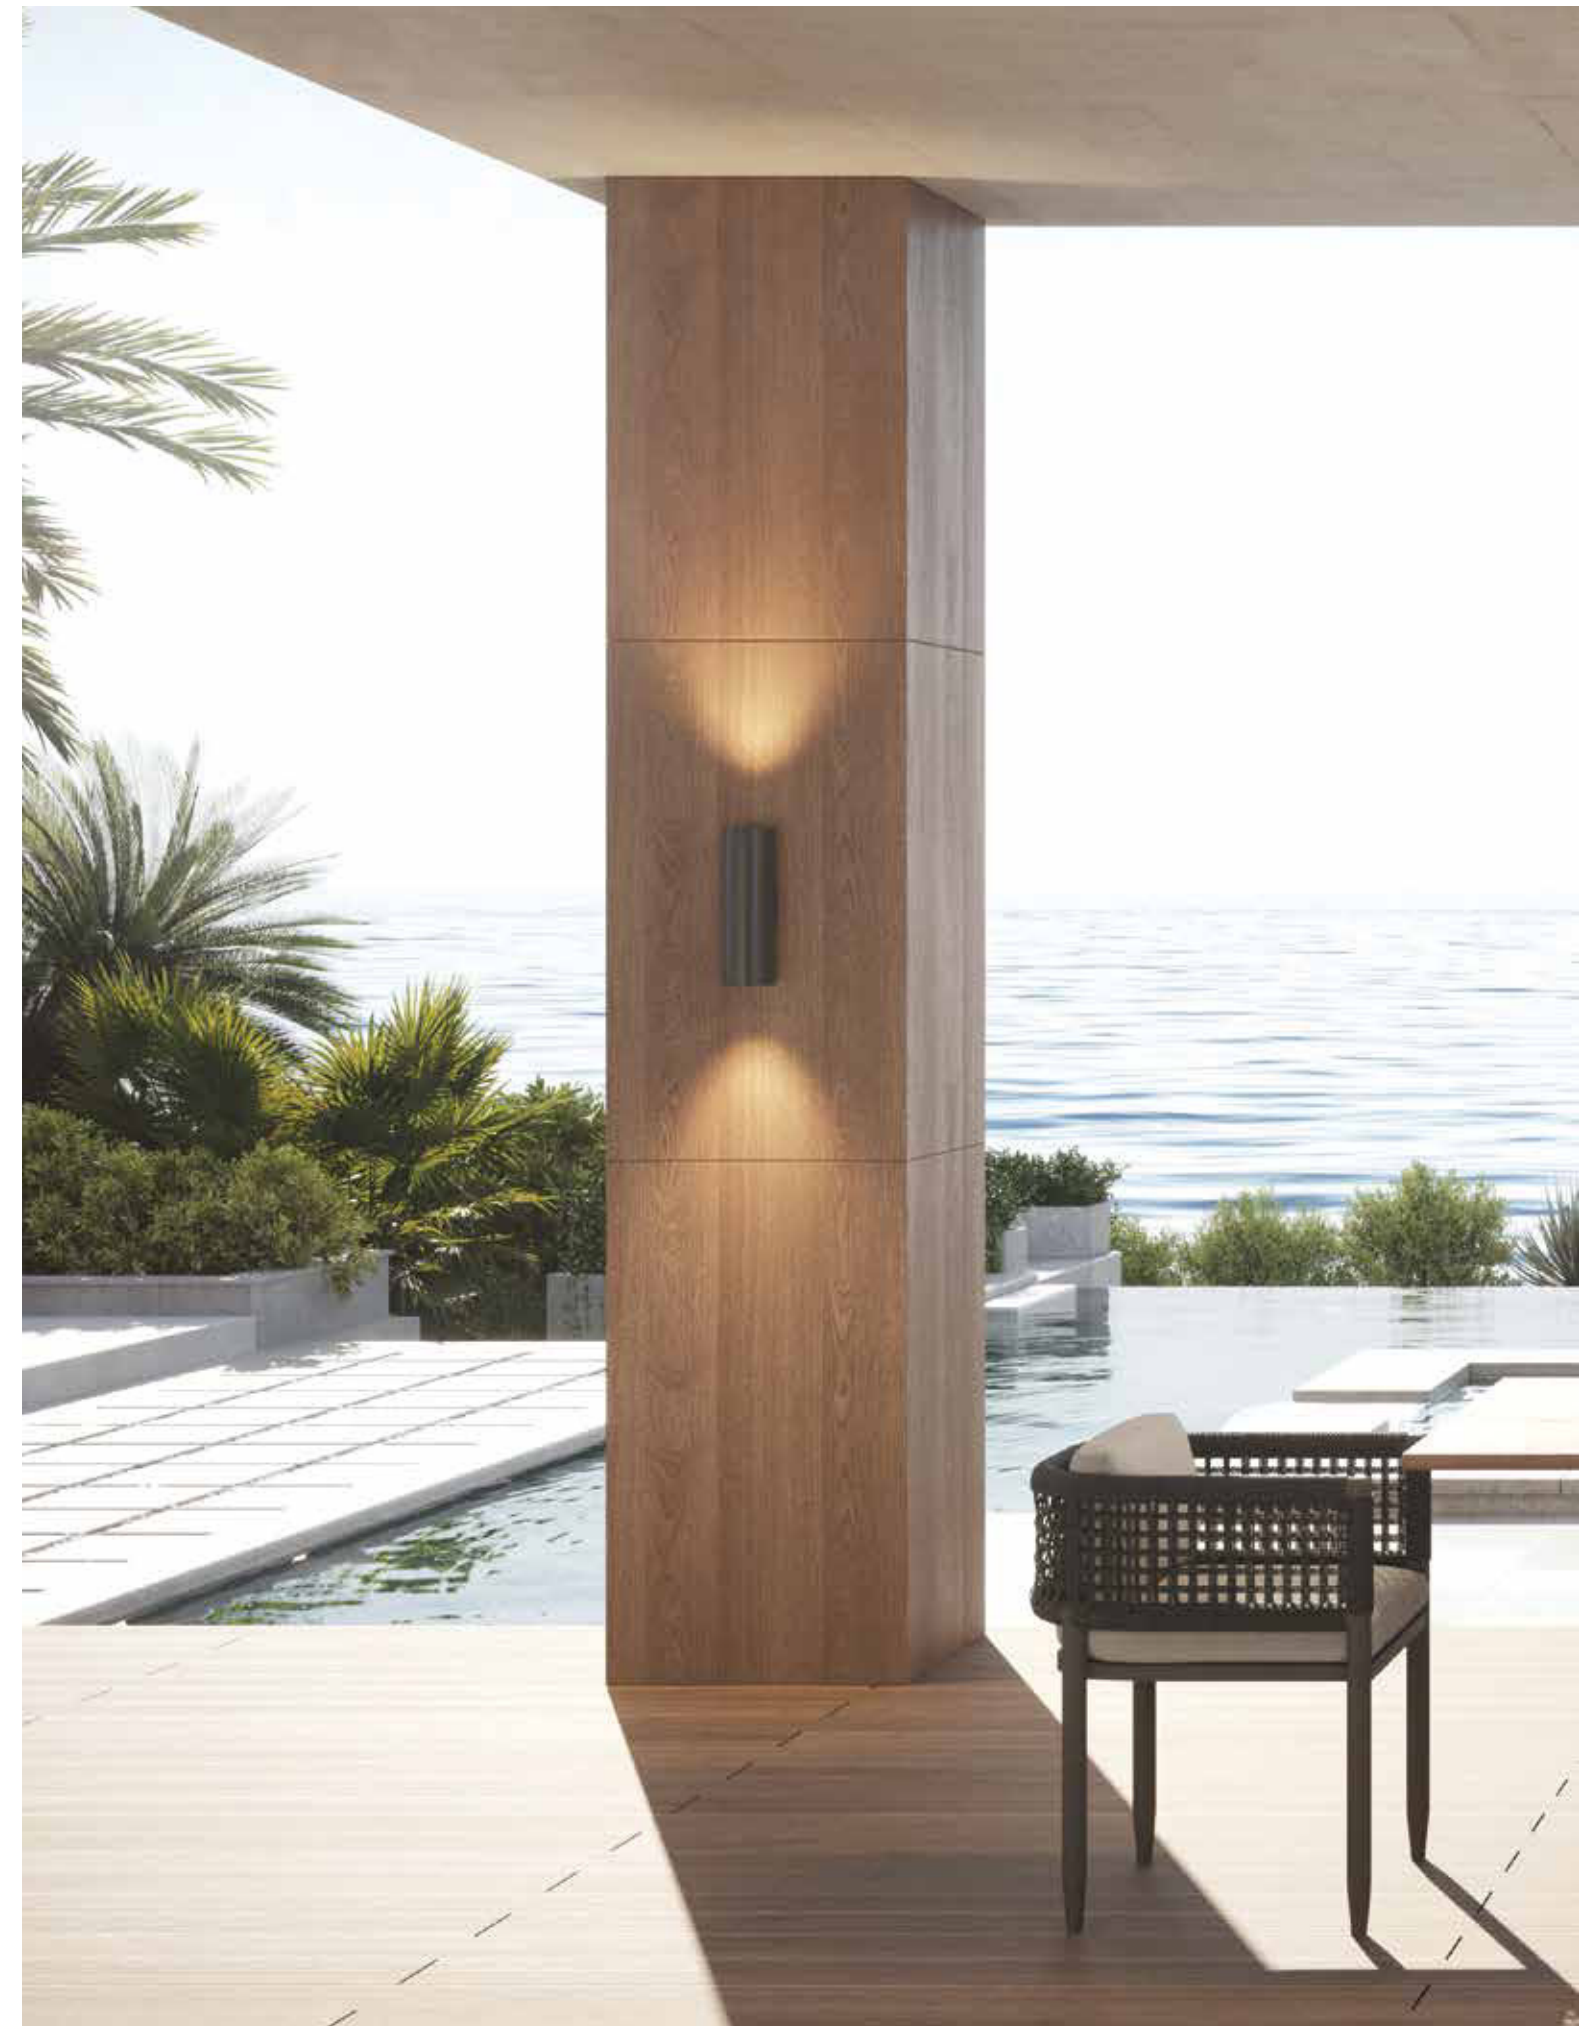


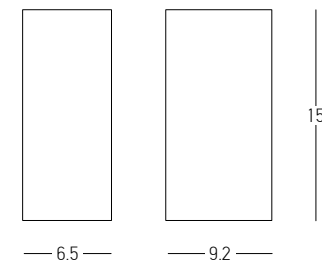


Bulb 2x GU10
 Power 15W MAX
 Input 220-240V, 50/60Hz
 IP 54
 Dimensions L: 9.2cm W: 6.5cm H: 15cm
 Material Aluminium - Tempered Glass
 Special Feature Up-Down Lighting
 Color Sandy White / Code E151

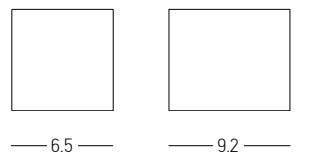


Bulb 1x GU10
 Power 15W MAX
 Input 220-240V, 50/60Hz
 IP 54
 Dimensions L: 9.2cm W: 6.5cm H: 9cm
 Material Aluminium - Tempered Glass
 Color Sandy White / Code E150

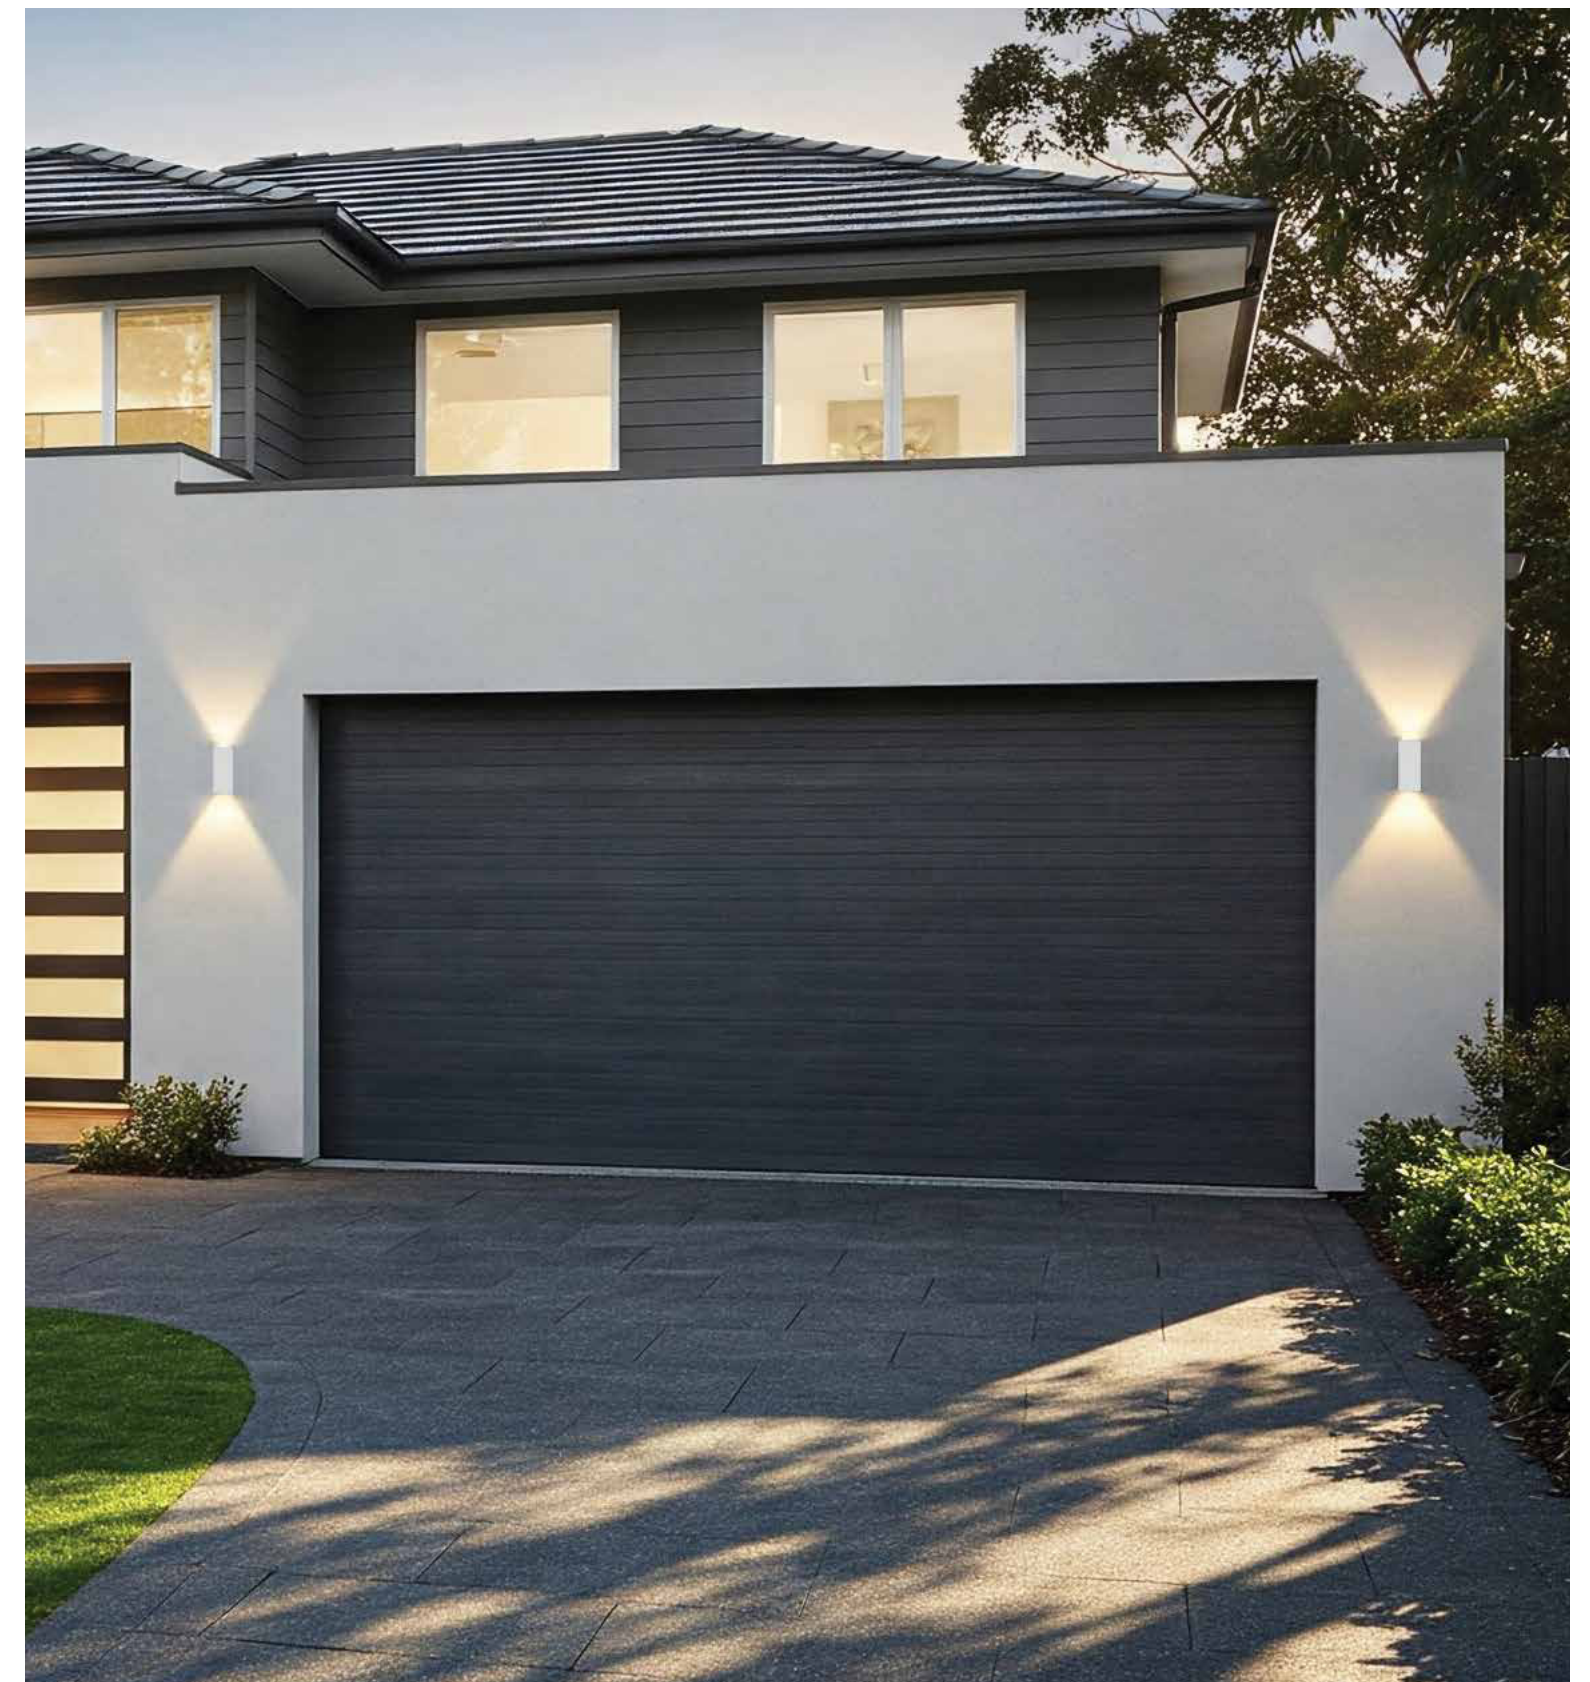

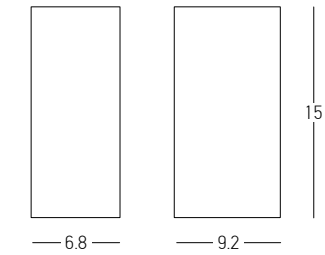


Bulb 2x GU10 LED
 Power 7W MAX
 Input 220-240V, 50/60Hz
 IP 54
 Dimensions L: 9.2cm W: 6.8cm H: 15cm
 Material ABS - Acrylic
 Special Feature Up-Down Lighting
 Color Sandy Black / **Code E307**

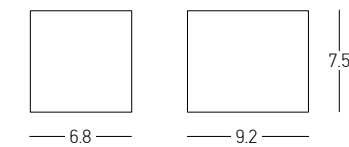


Bulb 1x GU10 LED
 Power 7W MAX
 Input 220-240V, 50/60Hz
 IP 54
 Dimensions L: 9.2cm W: 6.8cm H: 7.5cm
 Material ABS - Acrylic
 Color Sandy Black / **Code E306**



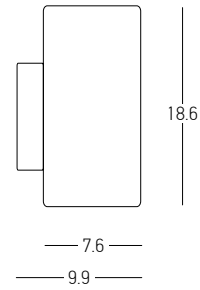


Bulb 2x GU10
 Power 9W MAX
 Input 220-240V, 50/60Hz
 IP 54
 Dimensions Ø: 7.6cm L: 9.9cm H: 18.6cm
 Material ABS - PC Diffuser
 Special Feature Up-Down Lighting
 Color White / **Code E186**

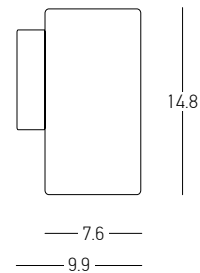


Bulb 1x GU10
 Power 9W MAX
 Input 220-240V, 50/60Hz
 IP 54
 Dimensions Ø: 7.6cm L: 9.9cm H: 14.8cm
 Material ABS - PC Diffuser
 Color White / **Code E185**




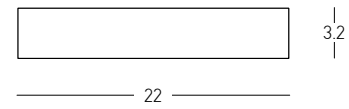


Power 11W
 Input 220-240V, 50/60Hz
 Color Temperature 3000K
 Lumen 653Lm
 Cri 80
 IP 54
 Dimensions L: 7.5cm W: 22cm H: 3.2cm
 Material Aluminium - Tempered Glass
 Color Sandy White / **Code E168**



Power 2x 2W
 Input 220-240V, 50/60Hz
 Color Temperature 3000K
 Lumen 320Lm
 Cri 80
 IP 65
 Dimensions L: 3cm W: 8.3cm H: 12.3cm
 Material ABS - PC Diffuser
 Special Feature Up-Down Lighting
 Color White / **Code E216**

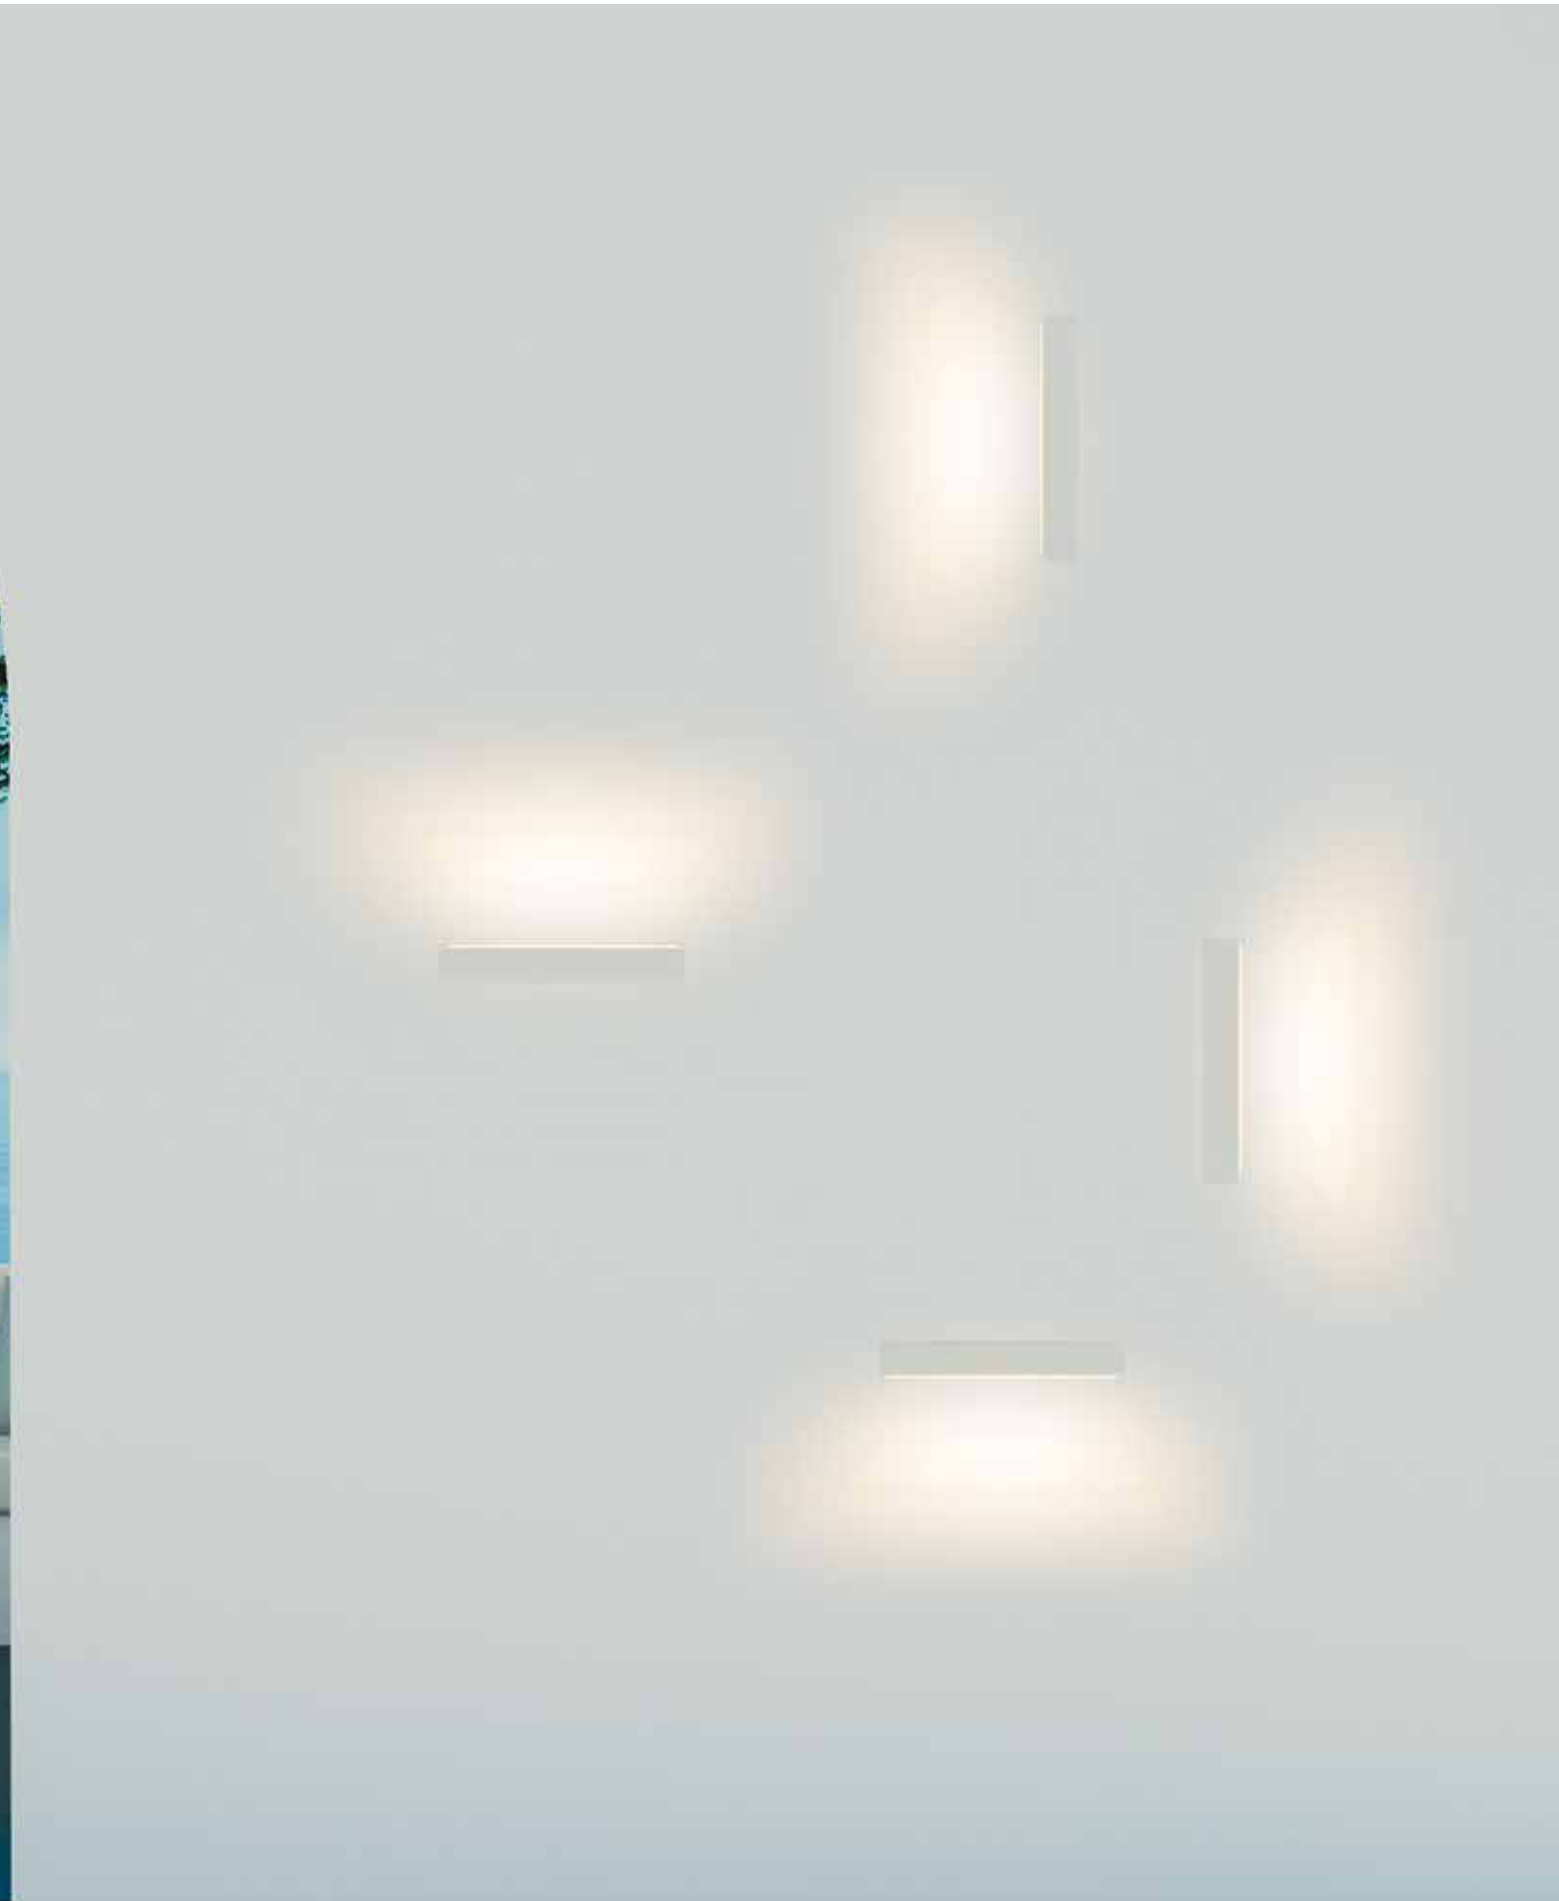


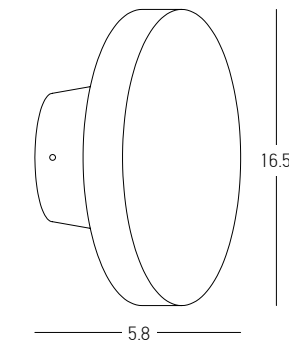

Power	8W
Input	220-240V, 50/60Hz
Color Temperature	3000K
Lumen	720Lm
Cri	80
IP	65
Dimensions	Ø: 16.5cm L: 5.8cm
Material	ABS - PC Diffuser
Color	Sandy Black / Code E305
Color	Sandy White / Code E304




Precision Light. Grounded Installation
Spike lights for targeted garden illumination.

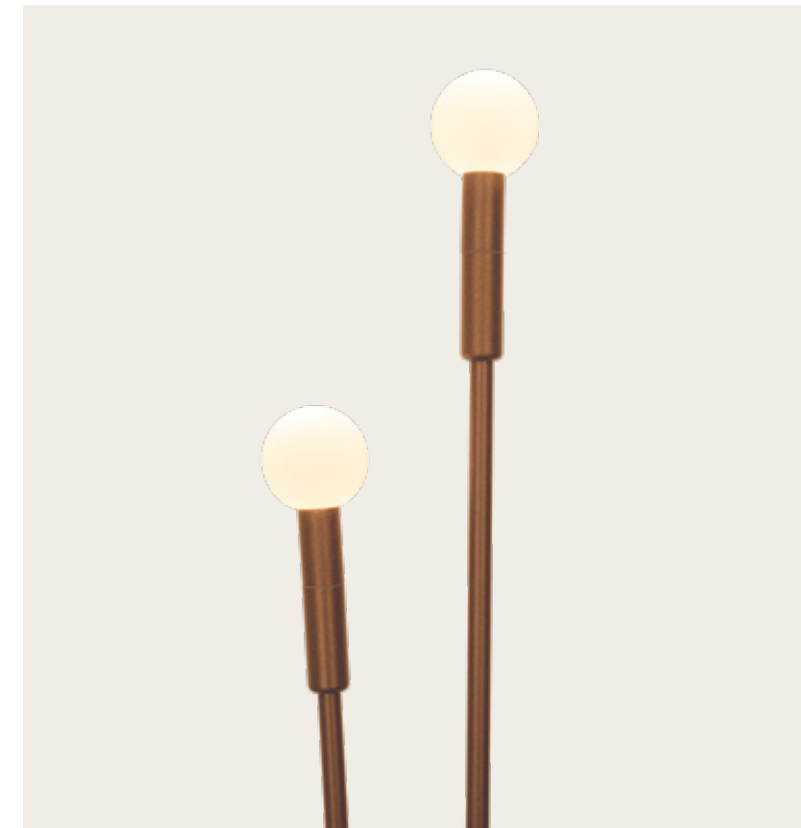


05. SPIKES






Power 1.5W
 Input 24V
 Color Temperature 3000K
 Lumen 90Lm
 Cri 80
 IP 65
 Dimensions Ø: 1.8cm H: 60cm
 Material Aluminium - Frosted Acrylic
 Special Feature 200cm Cable Available
 Spike Included
 Waterproof Connector Included
 Recommended Driver LPH-18-24 (Not Included)
 In Parallel Connection 1-11 pcs
 Color Brown / **Code E457**

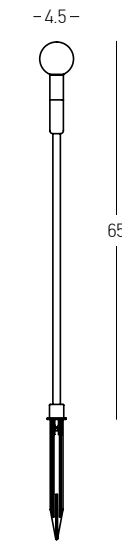

Power 1.5W
 Input 24V
 Color Temperature 3000K
 Lumen 90Lm
 Cri 80
 IP 65
 Dimensions Ø: 4.5cm H: 65cm
 Material Aluminium - Frosted Acrylic
 Special Feature 200cm Cable Available
 Spike Included
 Waterproof Connector Included
 Recommended Driver LPH-18-24 (Not Included)
 In Parallel Connection 1-11 pcs
 Color Brown / **Code E459**






Power 1.5W
 Input 24V
 Color Temperature 3000K
 Lumen 90Lm
 Cri 80
 IP 65
 Dimensions Ø: 1.8cm H: 99cm
 Material Aluminium - Frosted Acrylic
 Special Feature 200cm Cable Available
 Spike Included
 Waterproof Connector Included
 Recommended Driver LPH-18-24 (Not Included)
 In Parallel Connection 1-11 pcs
 Color Brown / **Code E458**

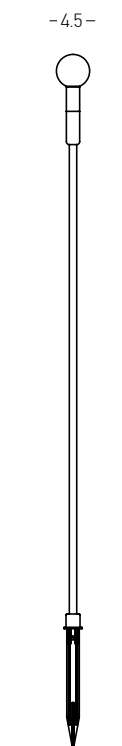

Power 1.5W
 Input 24V
 Color Temperature 3000K
 Lumen 90Lm
 Cri 80
 IP 65
 Dimensions Ø: 4.5cm H: 90cm
 Material Aluminium - Frosted Acrylic
 Special Feature 200cm Cable Available
 Spike Included
 Waterproof Connector Included
 Recommended Driver LPH-18-24 (Not Included)
 In Parallel Connection 1-11 pcs
 Color Brown / **Code E460**



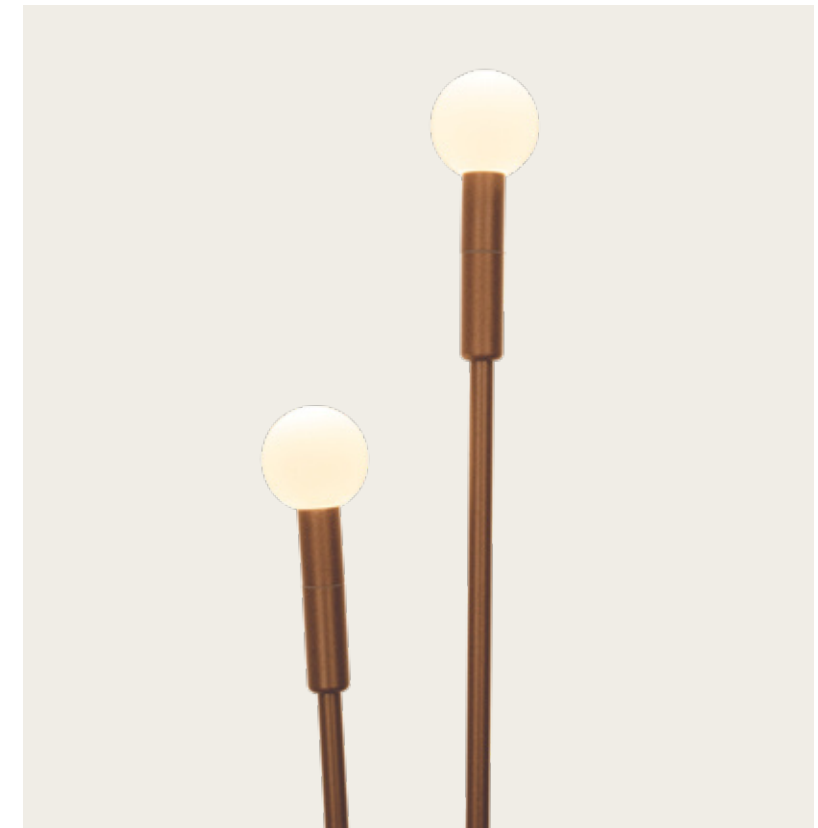

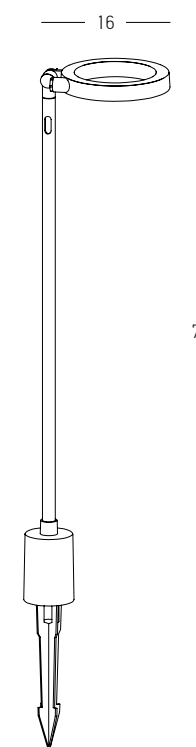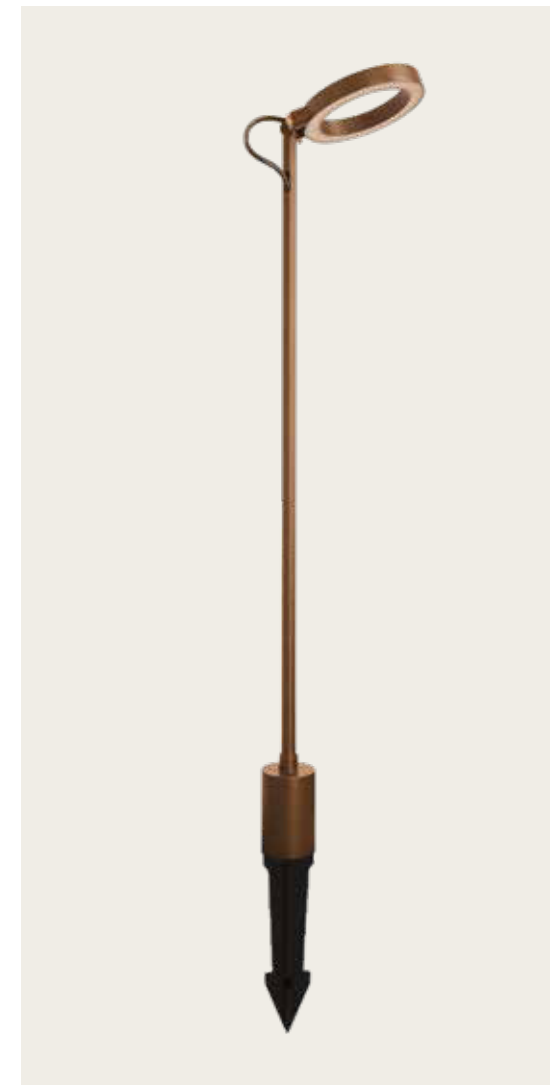


Power	7W
Input	220-240V, 50/60Hz
Color Temperature	3000K
Lumen	245Lm
Cri	80
IP	65
Dimensions	L: 16cm W: 12cm H: 70cm
Ring	Ø: 12cm H: 1.5cm
Material	Aluminium - PC Diffuser
Special Feature	50cm Cable Available Driver Included Spike Included Tilt Up-Down Waterproof Connector Included
Color	Brown / Code E494






Power	12W
Input	220-240V, 50/60Hz
Color Temperature	3000K
Lumen	595Lm
Cri	80
IP	65
Dimensions	Ø: 11cm H: 90cm
Material	Aluminium - PC Diffuser
Special Feature	100cm Cable Available Driver Included Spike Included Movable Head Waterproof Connector Included
Color	Green / Code E456



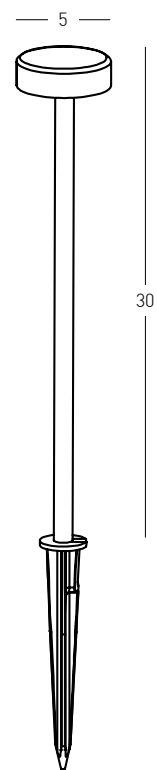


Power	1.5W
Input	24V
Color Temperature	3000K
Lumen	80Lm
Cri	80
IP	65
Dimensions	Ø: 5cm H: 30cm
Material	Stainless Steel - PC Diffuser
Special Feature	50cm Cable Available Spike Included
Recommended Driver	Waterproof Connector Included LPH-18-24 (Not Included) In Parallel Connection 1-10 pcs
Color	Brown / Code E465

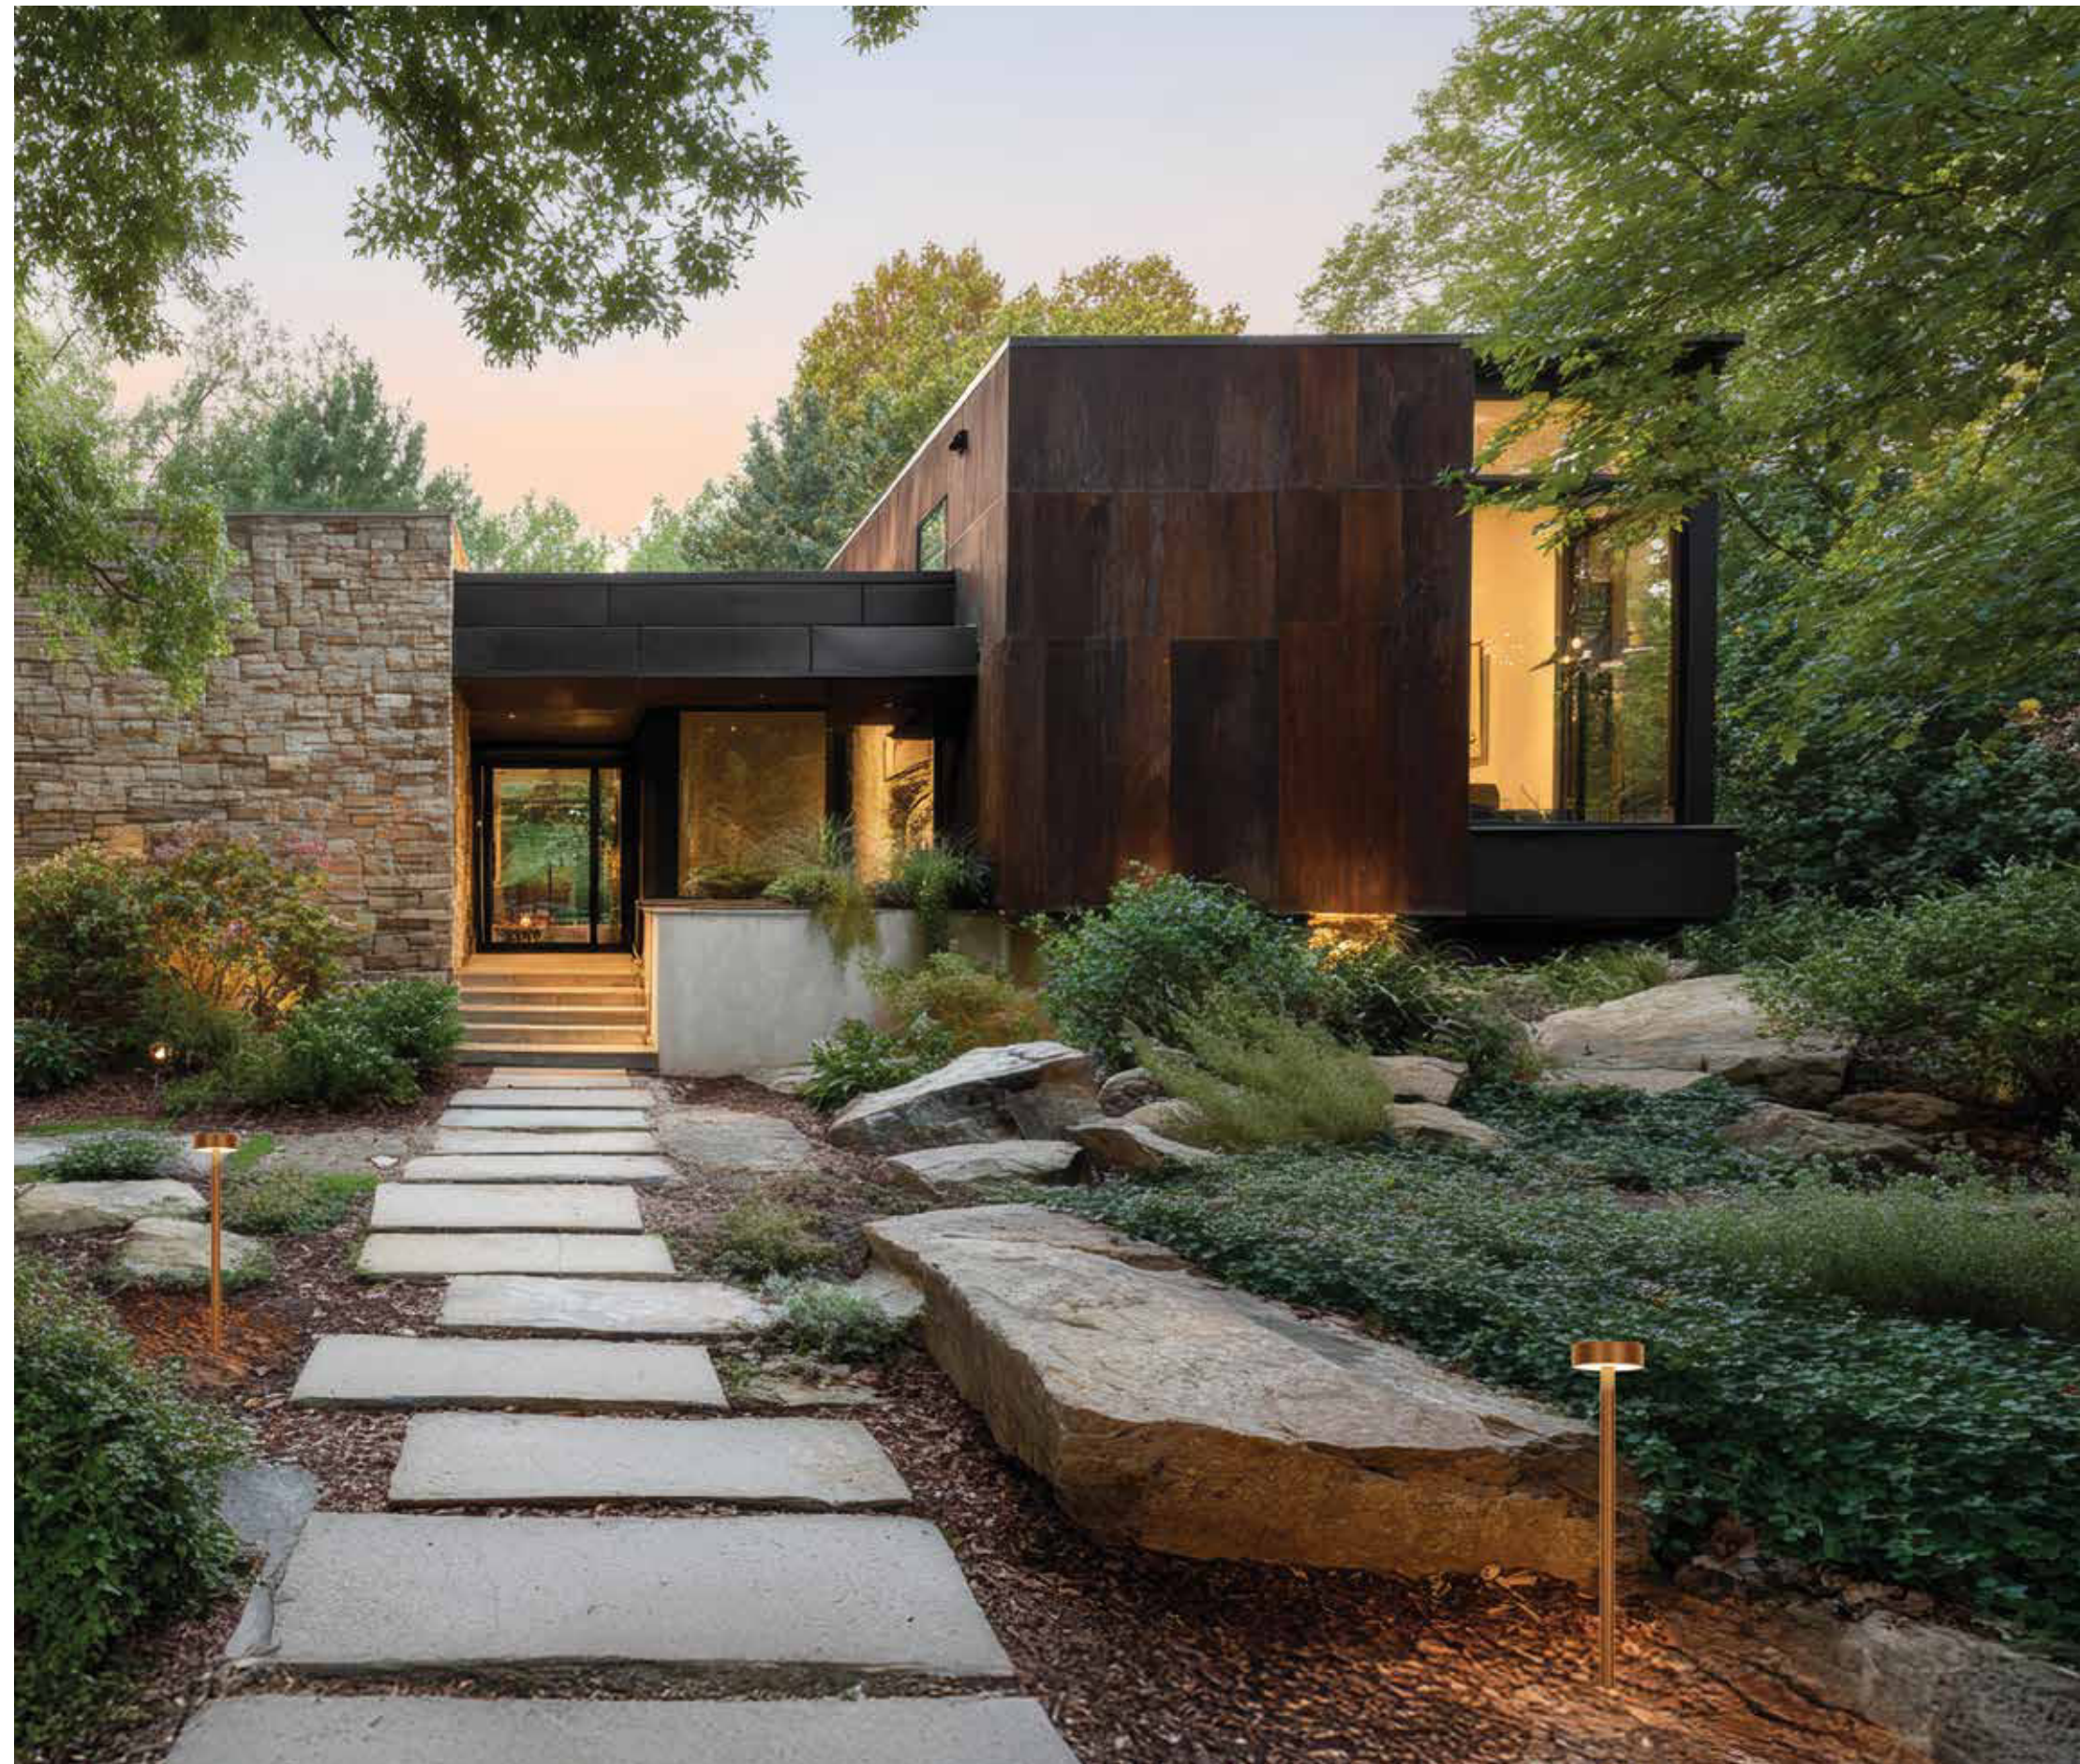



Power 0.5W
 Input 24V
 Color Temperature 2700K
 Lumen 50Lm
 Cri 80
 IP 65
 Dimensions Ø: 1cm H: 80cm
 Material Stainless Steel - PC Diffuser
 Special Feature 100cm Cable Available
 Spike Included
 Recommended Driver LPH-18-24 (Not Included)
 In Parallel Connection 1-17 pcs
 Color Dark Brown / **Code E330**
 Color Dark Green / **Code E331**





Power 0.5W
 Input 24V
 Color Temperature 2700K
 Lumen 50Lm
 Cri 80
 IP 65
 Dimensions Ø: 1cm H: 30cm
 Material Stainless Steel - PC Diffuser
 Special Feature 100cm Cable Available
 Spike Included
 Recommended Driver LPH-18-24 (Not Included)
 In Parallel Connection 1-17 pcs
 Color Dark Brown / **Code E328**
 Color Dark Green / **Code E329**



Driver
 Power 18W
 Input 220-240V, 50/60Hz
 Output 24V
 Dimensions L: 14cm W: 3cm H: 2.2cm
 IP 67

LPH-18-24

Waterproof Connection Box 1in / 1out , 16A , 450V
 IP 67
 Color Black / **Code Z0800-BA**

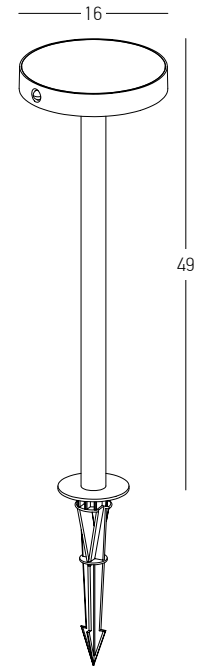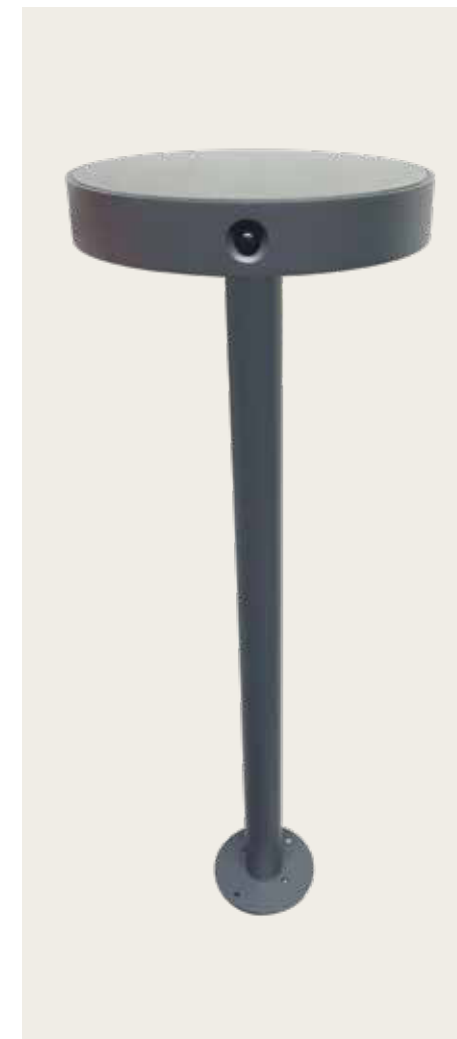

Power	2W
Input	3.7V
Battery	2200 MAH
Color Temperature	3000K
Lumen	85Lm
Cri	80
IP	54
Dimensions	Ø: 16cm H: 49cm
Material	Aluminium - PC Diffuser
Special Feature	Solar Panel 3 Lighting Modes Sense Distance 3 - 5m Base & Spike Included
Color	Graphite / Code E449



LIGHTING MODES OVERVIEW

Mode 1 • Dim + Motion Sensor

LED operates at 10% brightness when ambient light <20 lux. Upon Motion detection, brightness increases to 100% during movement. After 5 hours, standby dims to 5%, and motion-triggered output drops to 70%. Turns off when ambient light >20 lux.


Mode 2 • Constant Light

Motion sensor disabled. LED runs at 50% when ambient light <20 lux, reduces to 30% after 2 hours, and 20% after 5 hours. Turns off when ambient light >20 lux.

Mode 3 • Motion Only


No light at standby. LED activates at 100% upon motion detection and stays on for 25 seconds after movement stops. After 5 hours, motion-triggered output reduces to 70%. Turns off automatically when ambient light >20 lux.



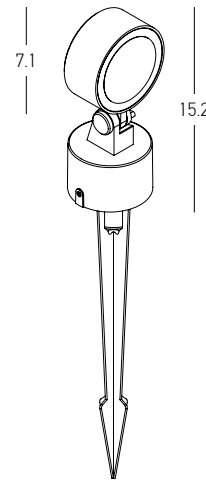

Power 10W
 Input 220-240V, 50/60Hz
 Color Temperature 3000K
 Lumen 779Lm
 Cri 90
 IP 65
 Dimensions Ø: 7.1cm H: 15.2cm
 Base Ø: 6.3cm H: 4cm
 Beam Angle 36°
 Material Aluminium - Glass
 Special Feature 30cm Cable Available
 Movable Spot
 Aluminium Spike Included
 Driver Included


Color Green / **Code E472**

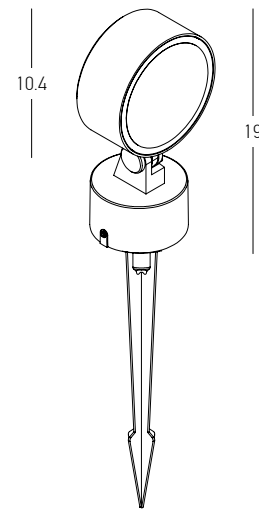

Power 25W
 Input 220-240V, 50/60Hz
 Color Temperature 3000K
 Lumen 1860Lm
 Cri 90
 IP 65
 Dimensions Ø: 10.4cm H: 19cm
 Base Ø: 7.5cm H: 4cm
 Beam Angle 24°
 Material Aluminium - Glass
 Special Feature 30cm Cable Available
 Movable Spot
 Aluminium Spike Included
 Driver Included

Color Green / **Code E473**




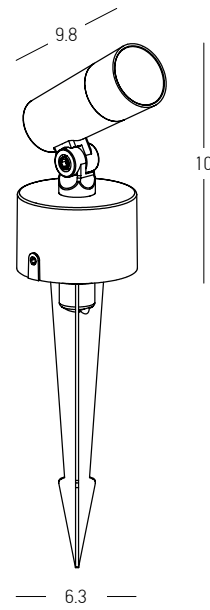

Power 10W
 Input 24V
 Color Temperature 3000K
 Lumen 534Lm
 Cri 90
 IP 65
 Dimensions Ø: 6.2cm H: 10cm
 Spot Dimensions Ø: 3.5cm L: 9.8cm
 Base Ø: 6.3cm H: 4cm
 Beam Angle 24°
 Material Aluminium - Glass
 Special Feature 30cm Cable Available
 Movable Spot
 Aluminium Spike Included
 Recommended Driver LPH-18-24 (Not Included)
 Color Graphite / **Code E468**



Lens for 10W Spot / Beam Angle 15° / **Code E469**

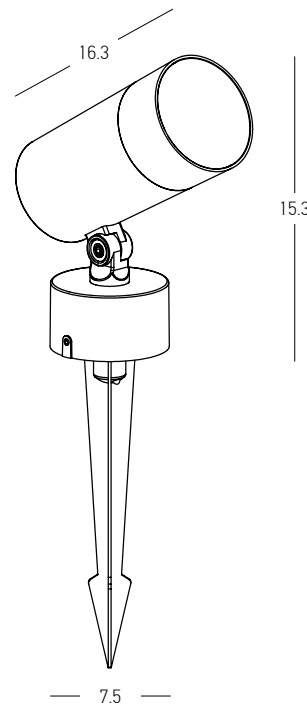

Power 28W
 Input 24V
 Color Temperature 3000K
 Lumen 1615Lm
 Cri 90
 IP 65
 Dimensions Ø: 7.6cm H: 15.3cm
 Spot Dimensions Ø: 7.8cm L: 16.3cm
 Base Ø: 7.5cm H: 4cm
 Beam Angle 24°
 Material Aluminium - Glass
 Special Feature 30cm Cable Available
 Movable Spot
 Aluminium Spike Included
 Recommended Driver LPV-35-24 (Not Included)
 Color Graphite / **Code E471**



Lens for 28W Spot / Beam Angle 15° / **Code E471**





Driver
 Power 18W
 Input 220-240V, 50/60Hz
 Output 24V
 Dimensions L: 14cm W: 3cm H: 2.2cm
 IP 67

LPH-18-24



Driver
 Power 35W
 Input 220-240V, 50/60Hz
 Output 24V
 Dimensions L: 14.8cm W: 4cm H: 3cm
 IP 67

LPV-35-24

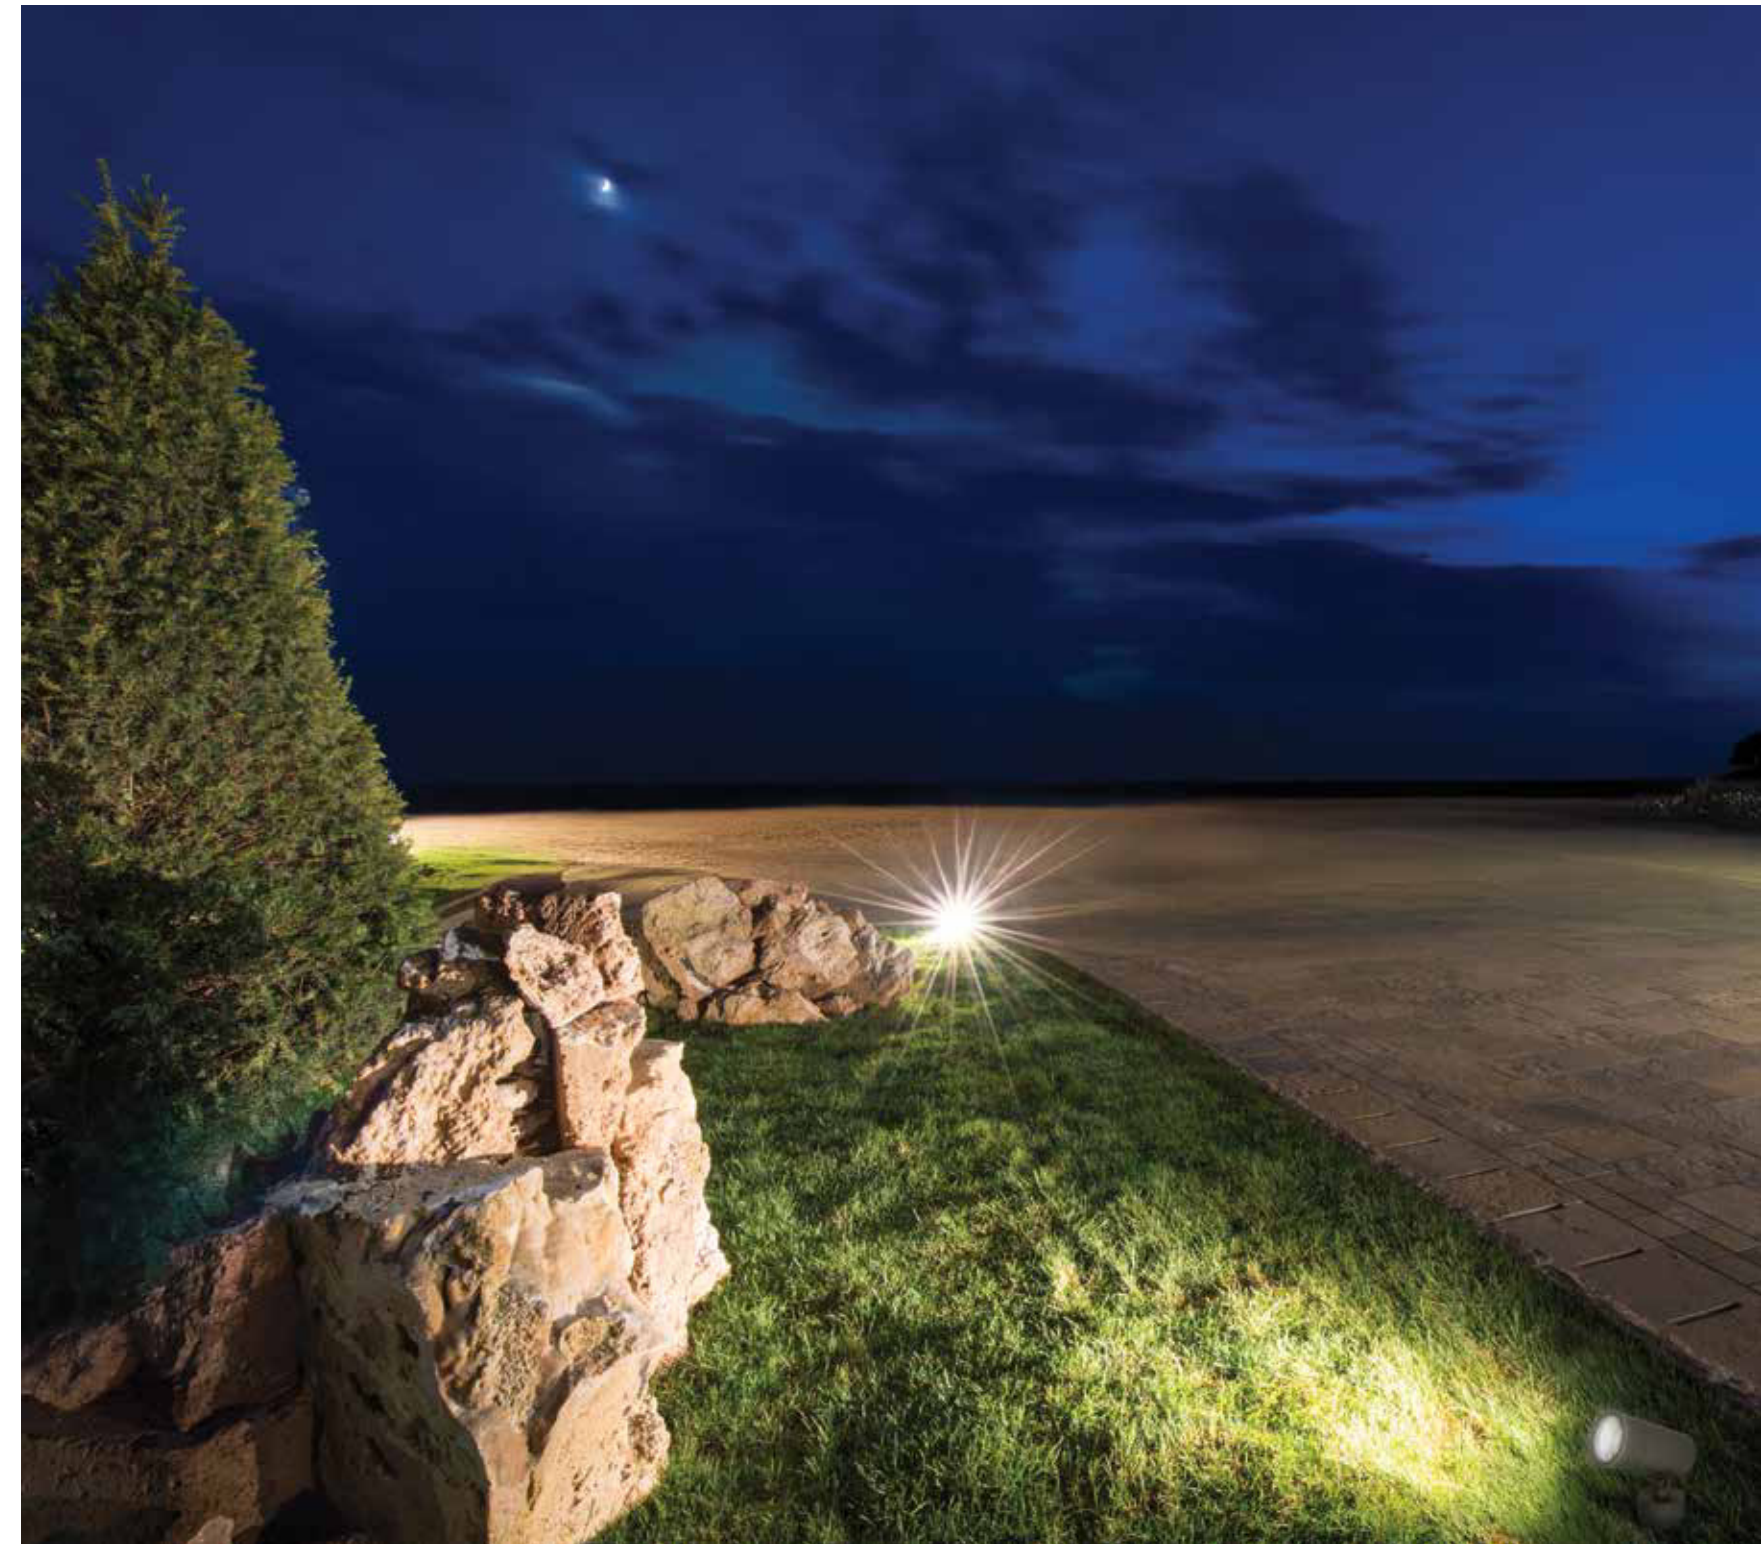

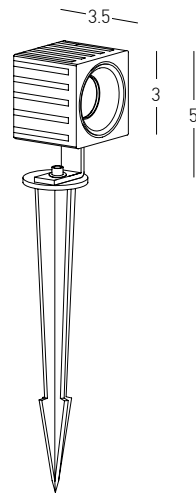

Power 3W
 Input 24V
 Color Temperature 3000K
 Lumen 228Lm
 Cri 90
 IP 65
 Dimensions L: 3cm W: 3.5cm H: 5cm
 Beam Angle 36°
 Material Aluminium - Tempered Glass
 Special Feature 30cm Cable Available
 Movable Spot
 Spike Included
 Recommended Driver LPH-18-24 (Not Included)
 In Parallel Connection 1-5 pcs
 Color Graphite / **Code E350**

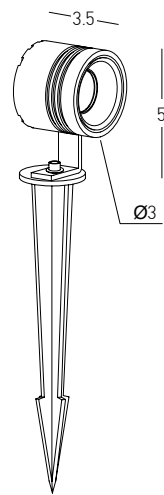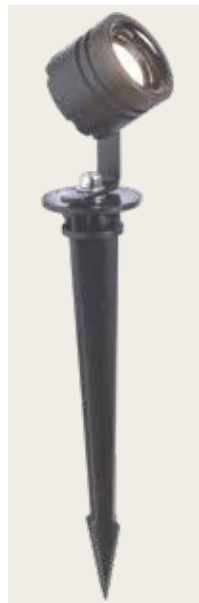


Power 3W
 Input 24V
 Color Temperature 3000K
 Lumen 228Lm
 Cri 90
 IP 65
 Dimensions Ø: 3cm W: 3.5cm H: 5cm
 Beam Angle 36°
 Material Aluminium - Tempered Glass
 Special Feature 30cm Cable Available
 Movable Spot
 Spike Included
 Recommended Driver LPH-18-24 (Not Included)
 In Parallel Connection 1-5 pcs
 Color Graphite / **Code E349**




Driver
 Power 18W
 Input 220-240V, 50/60Hz
 Output 24V
 Dimensions L: 14cm W: 3cm H: 2.2cm
 IP 67





Waterproof Connection Box 1in / 1out , 16A , 450V
 IP 67
 Color Black / **Code Z0800-BA**

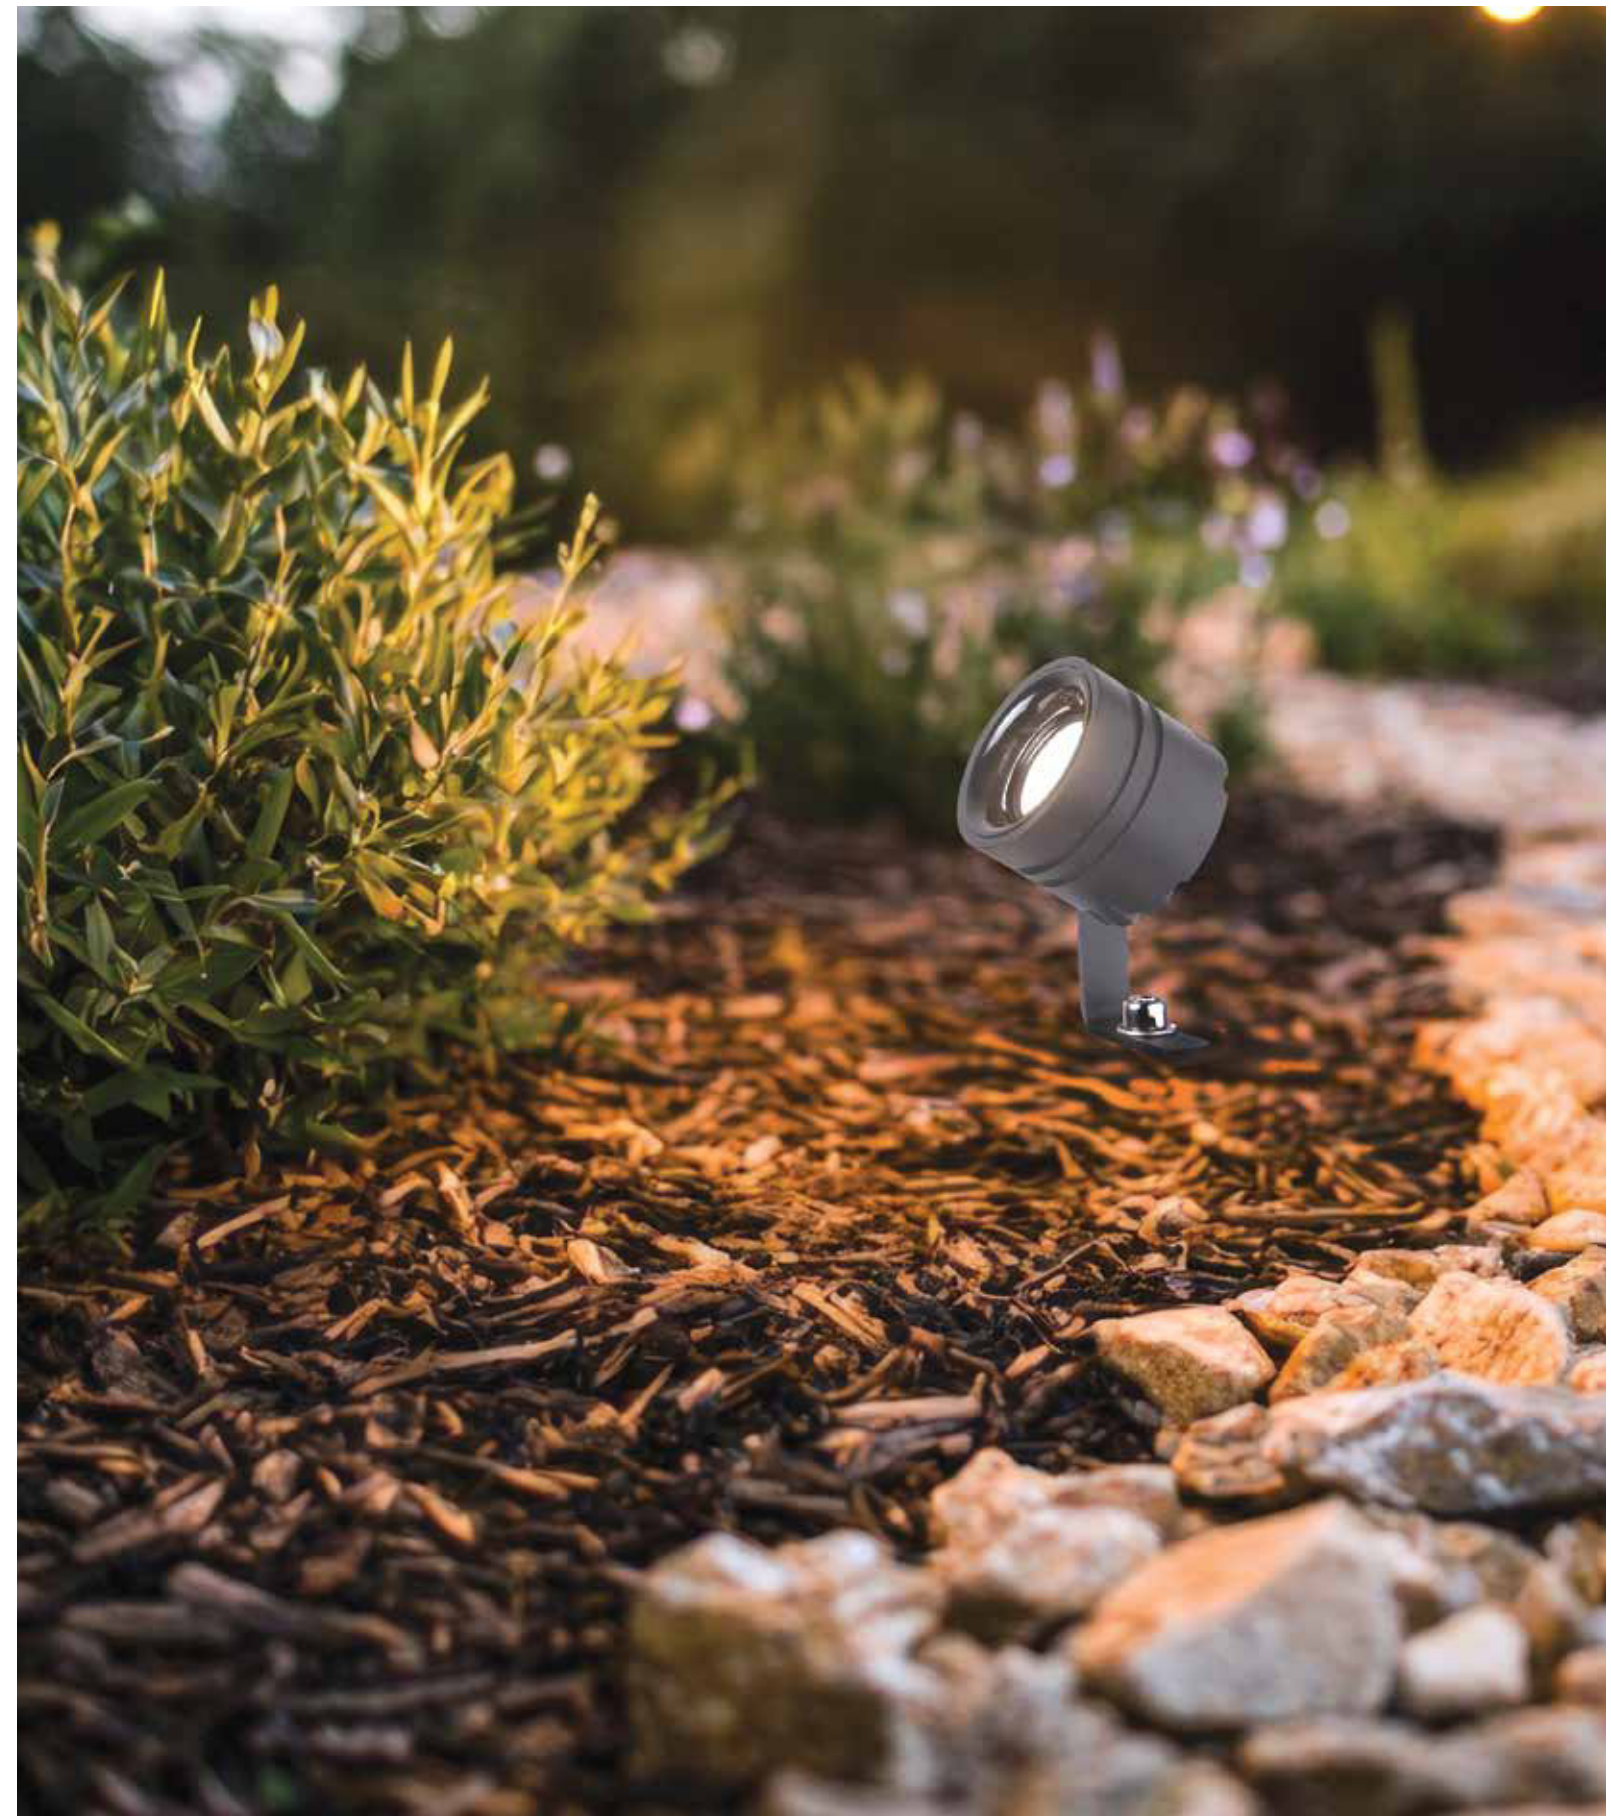

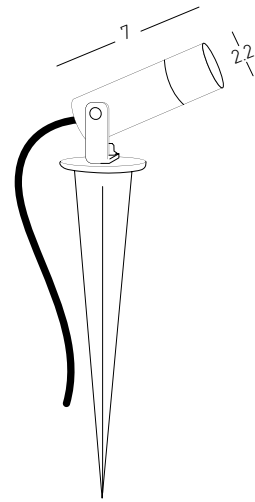


Power 2.3W
 Input 3.2V, 700mA
 Color Temperature 2700K
 Lumen 130Lm
 Cri 80
 IP 54
 Dimensions Ø: 2.2cm L: 7cm H: 3.2cm
 Beam Angle 40°
 Material Brush
 Special Feature 60cm Cable Available
 Movable Spot
 Spike Included
 Recommended Driver V350-1050 (Not Included)
 In Series Connection 1-9 pcs
 Color Natural Brush / **Code E403**

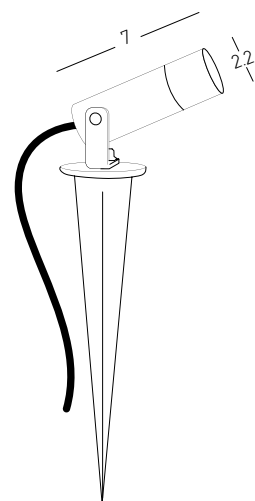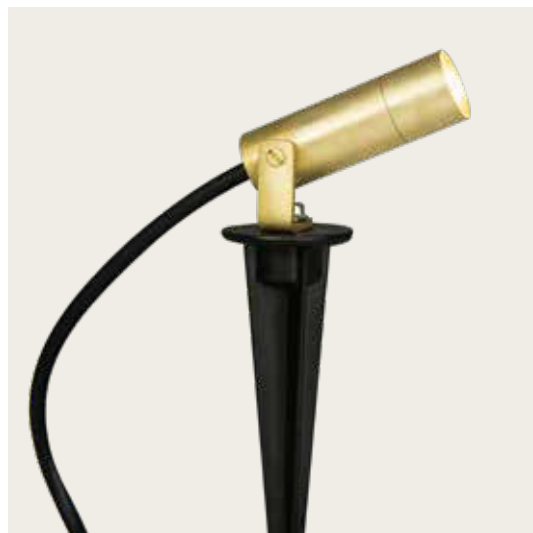


Power 2.3W
 Input 3.2V, 700mA
 Color Temperature 3000K
 Lumen 130Lm
 Cri 80
 IP 54
 Dimensions Ø: 2.2cm L: 7cm H: 3.2cm
 Beam Angle 40°
 Material Brush
 Special Feature 60cm Cable Available
 Movable Spot
 Spike Included
 Recommended Driver V350-1050 (Not Included)
 In Series Connection 1-9 pcs
 Color Natural Brush / **Code E404**




Driver
 Power 34W
 Input 220-240V, 50/60Hz
 Output 2 - 32V
 Dimensions L: 15cm W: 4cm H: 3cm
 IP 20

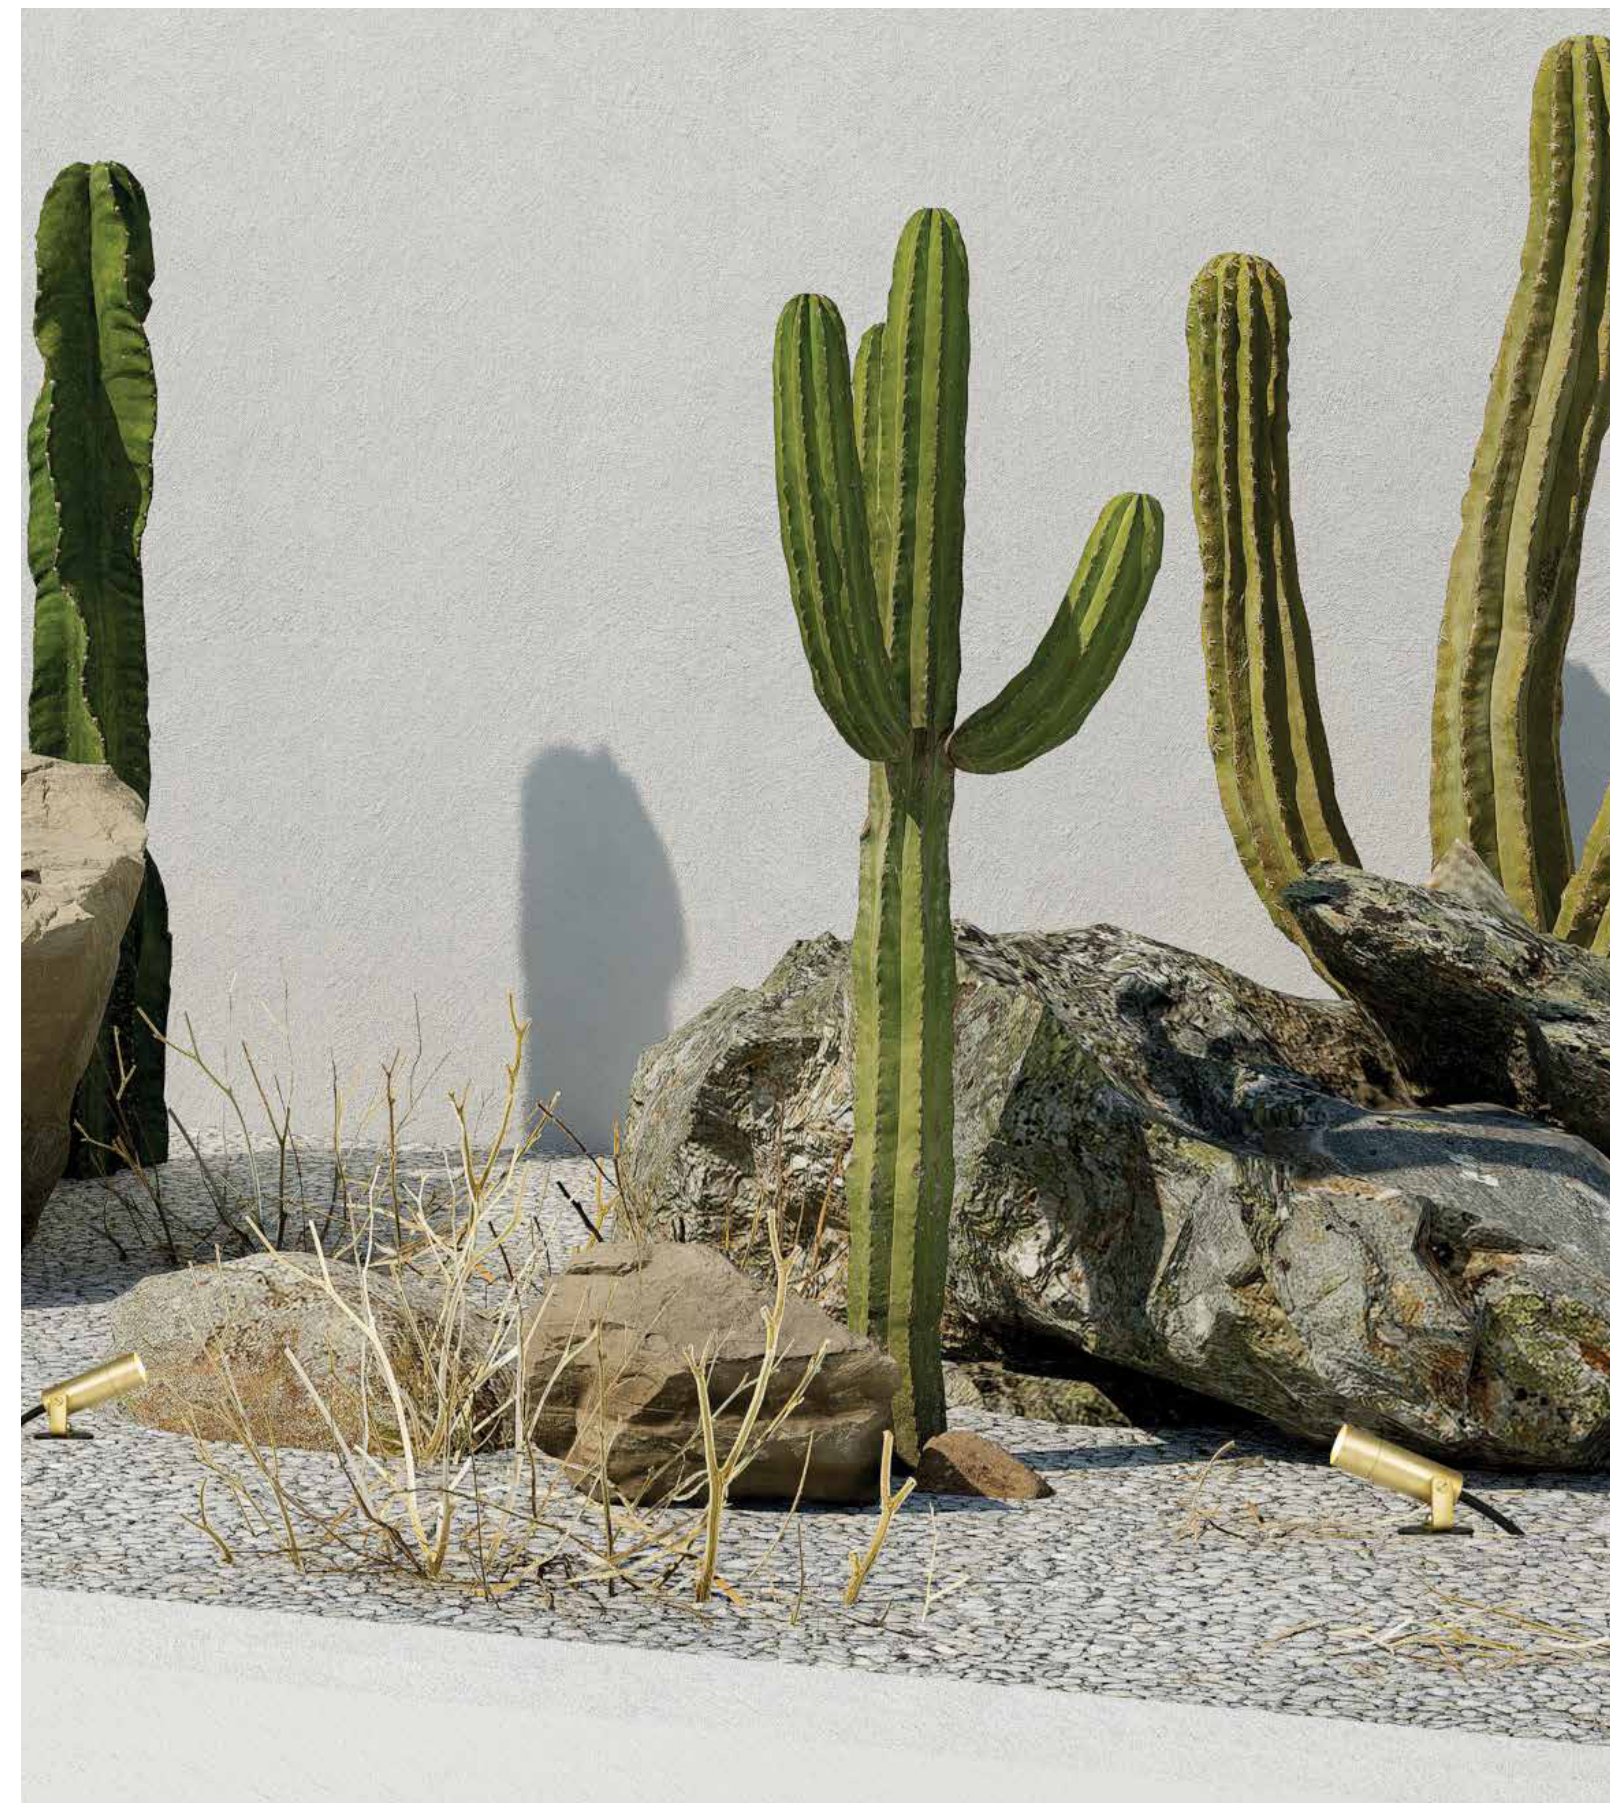

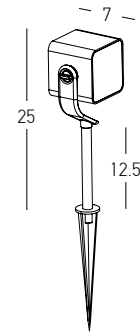

Power 12W
 Input 220-240V, 50/60Hz
 Color Temperature 3000K
 Lumen 740Lm
 Cri 80
 IP 65
 Dimensions L: 7cm W: 7cm H: 12.5-25cm
 Base Ø: 6cm H: 0.5cm
 Beam Angle 40°
 Material Aluminium - Tempered Glass
 Special Feature 40cm Cable Available
 Movable Spot
 Spike & Base Included
 Waterproof Connector Included


Color Graphite / **Code E286**

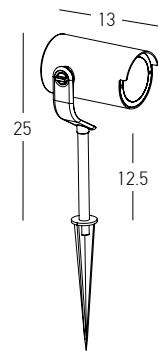

Power 12W
 Input 220-240V, 50/60Hz
 Color Temperature 3000K
 Lumen 740Lm
 Cri 80
 IP 65
 Dimensions Ø: 7.5cm L: 13cm H: 12.5-25cm
 Base Ø: 6cm H: 0.5cm
 Beam Angle 40°
 Material Aluminium - Tempered Glass
 Special Feature 40cm Cable Available
 Movable Spot
 Spike & Base Included
 Waterproof Connector Included

Color Graphite / **Code E285**





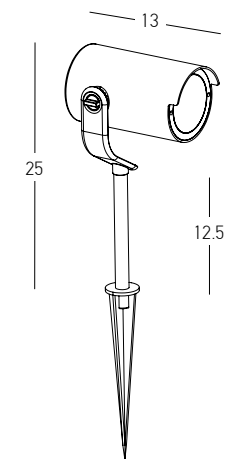


Bulb 1x GU10
 Power 20W MAX
 Input 220-240V, 50/60Hz
 IP 65
 Dimensions Ø: 7.5cm L: 13cm H: 25cm
 Base Ø: 6cm H: 0.5cm
 Material Aluminium - Tempered Glass
 Special Feature 40cm Cable Available
 Movable Spot
 Spike & Base Included
 Waterproof Connector Included

 Color Brown / **Code E284**



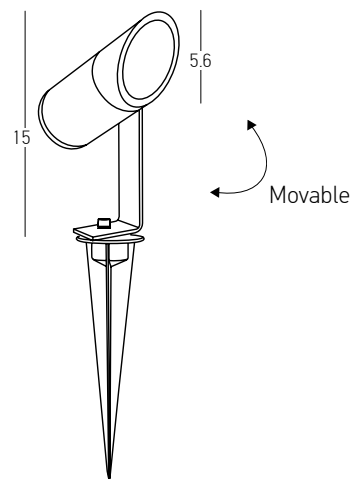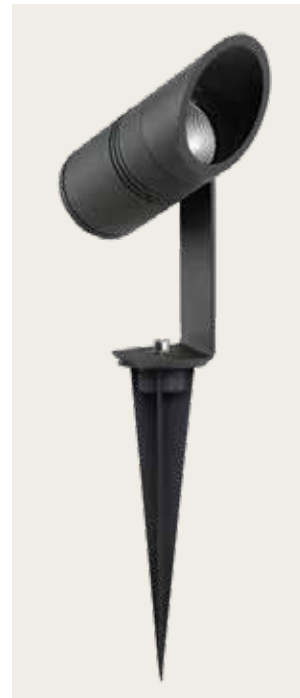


Power 7W
 Input 220-240V, 50/60Hz
 Color Temperature 3000K
 Lumen 516Lm
 Cri 80
 IP 65
 Dimensions Ø: 5.6cm H: 15cm
 Beam Angle 36°
 Material Aluminium - Tempered Glass
 Special Feature 20cm Cable Available
 Movable Spot
 Spike Included
 Color Graphite / **Code E152**

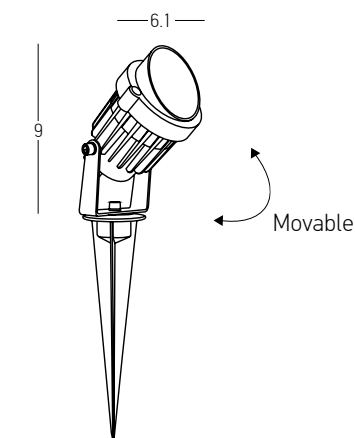


Power 5W
 Input 220-240V, 50/60Hz
 Color Temperature 3000K
 Lumen 380Lm
 Cri 80
 IP 65
 Dimensions Ø: 6.1cm H: 9cm
 Beam Angle 36°
 Material Aluminium - Tempered Glass
 Special Feature 20cm Cable Available
 Movable Spot
 Spike Included
 Color Graphite / **Code E153**



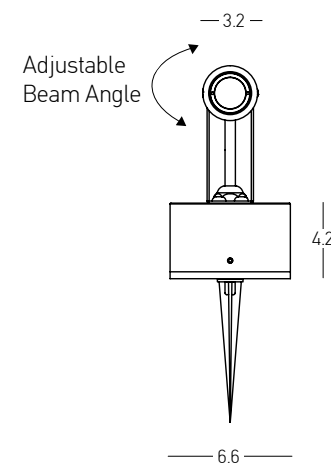

Power 2.1W
 Input 220-240V, 50/60Hz
 Color Temperature 2700K
 Lumen 168Lm
 Cri 80
 IP 54
 Dimensions L: 8cm H: 8.5cm
 Base Ø: 6.6cm H: 4.2cm
 Beam Angle 10°-60°
 Material Aluminium - Stainless Steel
 Special Feature 60cm Cable Available
 Stick Ø: 3.2cm H: 8cm
 Spike Included

Color Sandy Black / **Code E177-B**

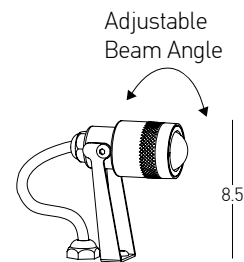

Power 2.1W
 Input 3V, 700mA
 Color Temperature 2700K
 Lumen 168Lm
 Cri 80
 IP 54
 Dimensions L: 8cm H: 8.5cm
 Beam Angle 10-60°
 Material Aluminium - Stainless Steel
 Special Feature 60cm Cable Available
 Stick Ø: 3.2cm H: 8cm
 Spike Included


Recommended Driver V350-1050 (Not Included)
 In Series Connection 1-10 pcs


Color Sandy Black / **Code E177-A**




Driver
 Power
 Input
 Output
 Dimensions
 IP

V350-1050
 34W
 220-240V, 50/60Hz
 2 - 32V
 L: 15cm W: 4cm H: 3cm
 20

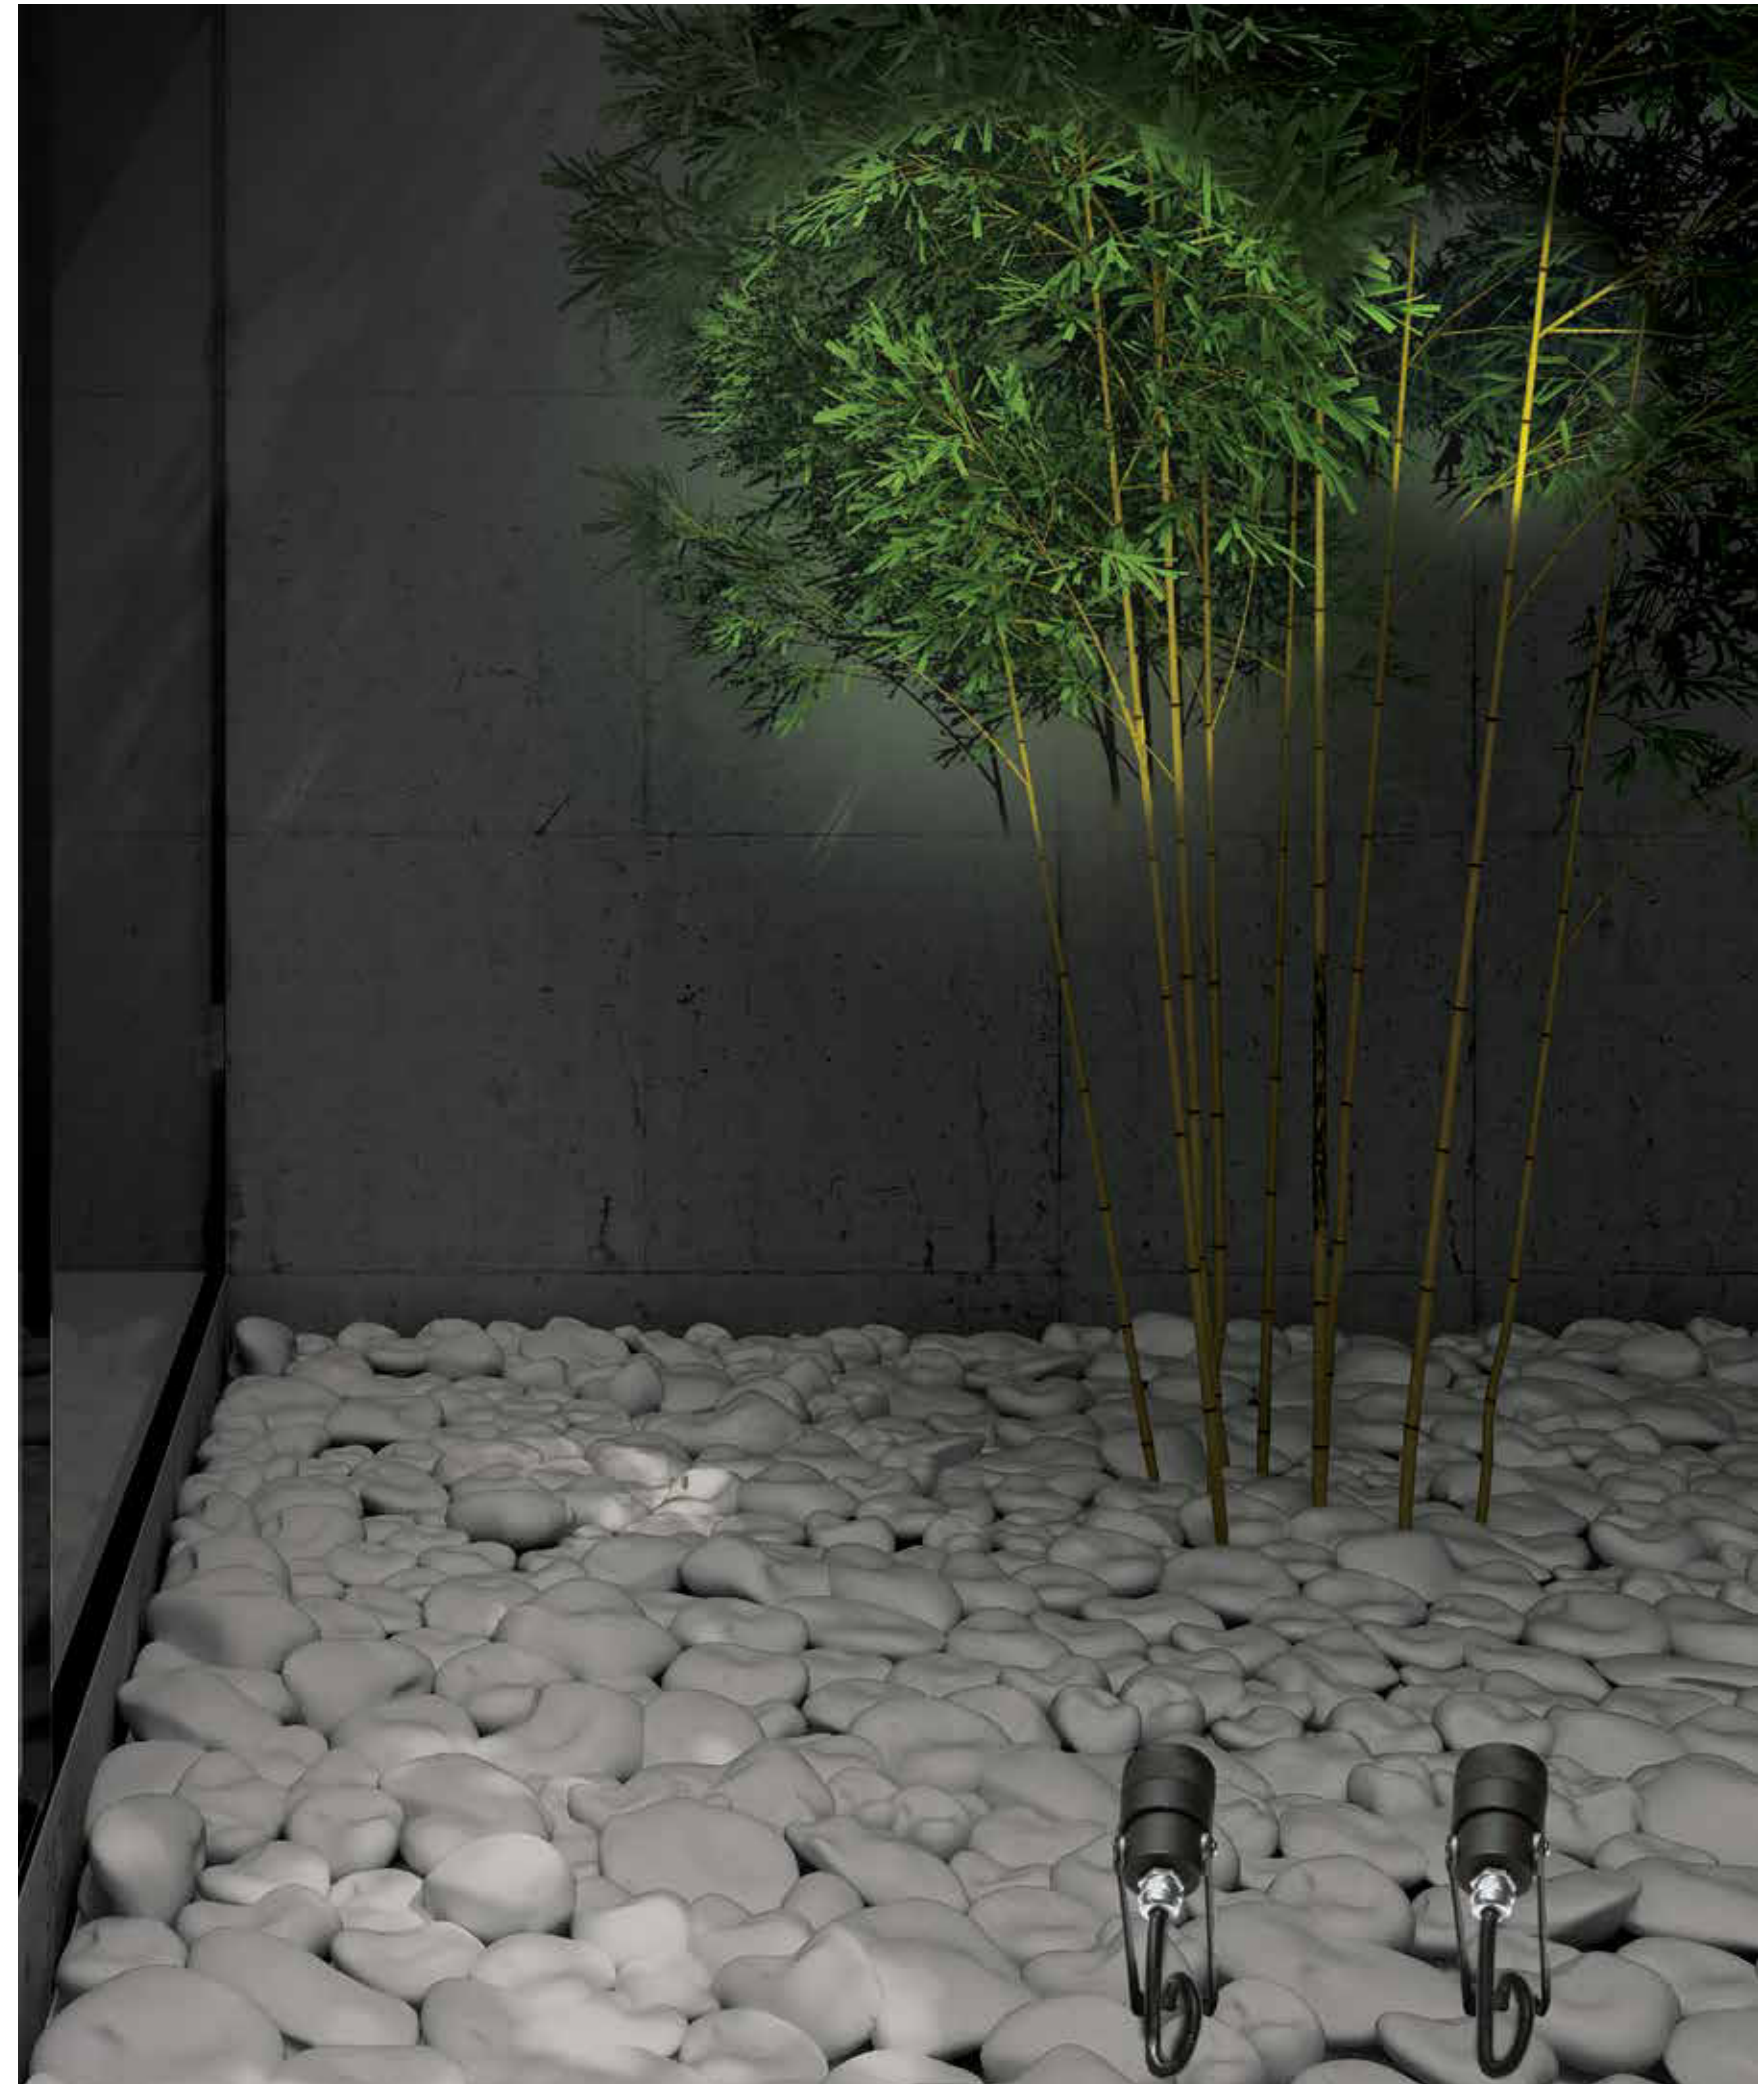

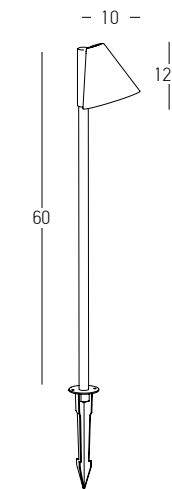


Bulb 1x GU10
 Power 20W MAX
 Input 220-240V, 50/60Hz
 IP 65
 Dimensions L: 10cm W: 10cm H: 60cm
 Material Aluminium - Tempered Glass
 Special Feature 50cm Cable Available
 Spike Included
 Recommended Base E282-SP / Not Included
 Color Graphite / **Code E281**

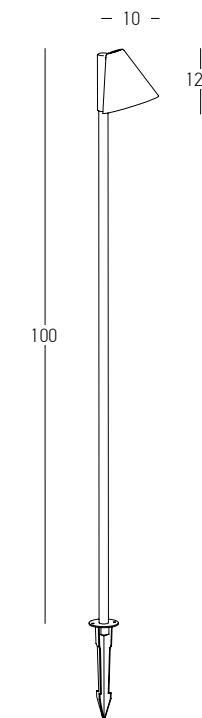

Bulb 1x GU10
 Power 20W MAX
 Input 220-240V, 50/60Hz
 IP 65
 Dimensions L: 10cm W: 10cm H: 100cm
 Material Aluminium - Tempered Glass
 Special Feature 40cm Cable Available
 Spike Included
 Recommended Base E282-SP / Not Included
 Color Graphite / **Code E282**





Base for E281 - E282
 Dimensions Ø: 9.5cm H: 2cm
 Material Aluminium
 Color Graphite / **Code E282-SP**

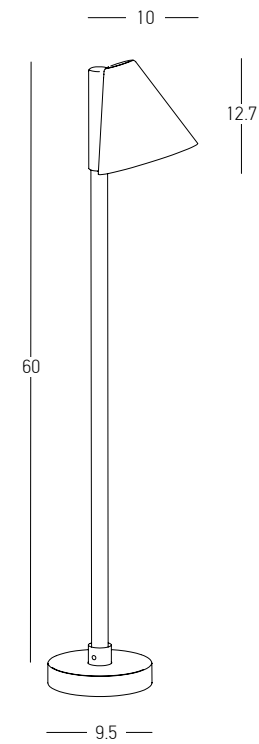

Power 6W
 Input 220-240V, 50/60Hz
 Color Temperature 3000K
 Lumen 522Lm
 Cri 80
 IP 65
 Dimensions L: 10cm W: 10cm H: 60cm
 Base Ø: 9.5cm H: 2cm
 Beam Angle 40°
 Material Aluminium - Tempered Glass
 Special Feature 50cm Cable Available
 Spike & Base Included
 Color Graphite / **Code E283**




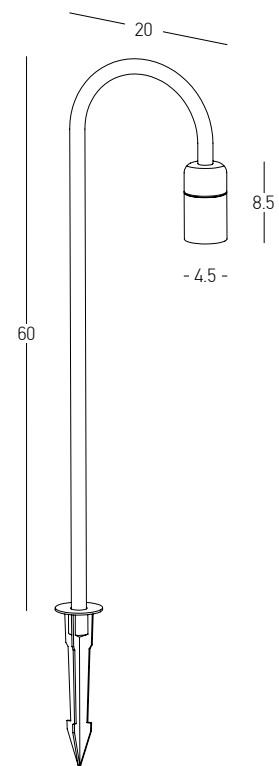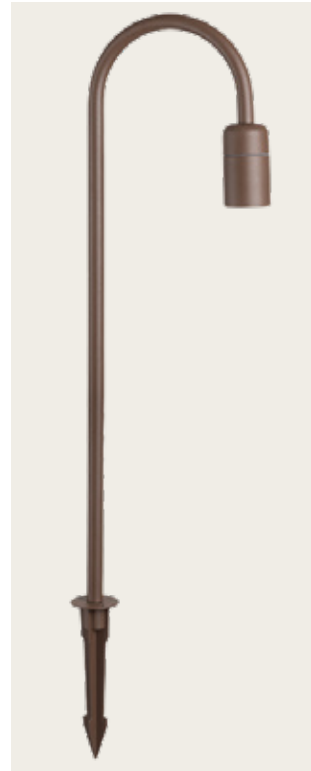

Power 6W
 Input 220-240V, 50/60Hz
 Color Temperature 3000K
 Lumen 500Lm
 Cri 80
 IP 65
 Dimensions L: 20cm W: 4.5cm H: 60cm
 Beam Angle 40°
 Material Aluminium - Tempered Glass
 Special Feature 40cm Cable Available
 Spike Included

Color Dark Brown / **Code E279**




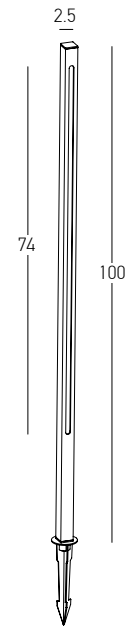


Power 15W
Input 220-240V, 50/60Hz
Color Temperature 3000K
Lumen 1550Lm
Cri 80
IP 65
Dimensions L: 2.5cm W: 2.5cm H: 100cm
Base Ø: 9.5cm H: 2cm
Material Aluminium - Opal PC Diffuser
Special Feature 40cm Cable Available
Spike & Base Included
Profile 2.5 x 2.5cm

Color Dark Brown / **Code E280**



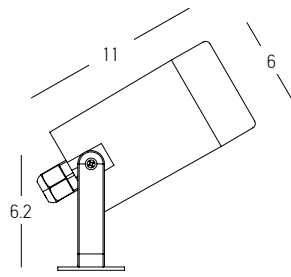


Bulb 1x GU10 LED
 Power 7W MAX
 Input 220-240V, 50/60Hz
 IP 54
 Dimensions Ø: 6cm L: 11cm H: 6.2cm
 Material ABS - PC Diffuser
 Special Feature 30cm Cable Available
 Movable Spot
 Without Spike
 Color Black / **Code E311**

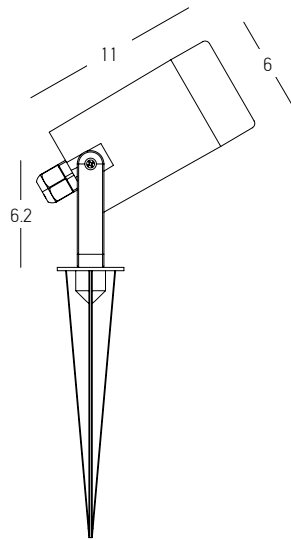


Bulb 1x GU10 LED
 Power 7W MAX
 Input 220-240V, 50/60Hz
 IP 54
 Dimensions Ø: 6cm L: 11cm H: 6.2cm
 Material ABS - PC Diffuser
 Special Feature 30cm Cable Available
 Movable Spot
 Spike Included
 Color Black / **Code E312**



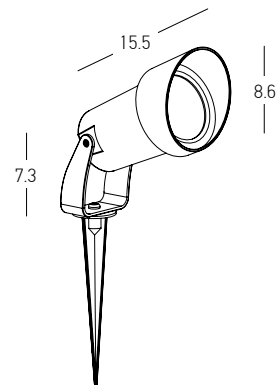

Bulb 1x GU10 LED
 Power 7W MAX
 Input 220-240V, 50/60Hz
 IP 54
 Dimensions Ø: 8.6cm L: 15.5cm H: 7.3cm
 Material ABS - Tempered Glass
 Special Feature 30cm Cable Available
 Movable Spot
 Spike Included
 Color Black / **Code E310**

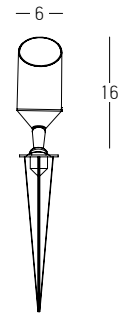


Bulb 1x GU10 LED
 Power 5W MAX
 Input 220-240V, 50/60Hz
 IP 65
 Dimensions Ø: 6cm H: 16cm
 Material ABS - PC Diffuser
 Special Feature 30cm Cable Available
 Movable Spot
 Spike Included
 Color Black / **Code E217**




Step by Step Safety and Visibility
Guiding your path with confidence.




06. STEP

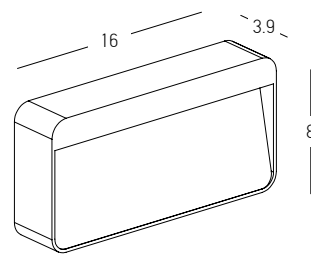


Power 6W
 Input 220-240V, 50/60Hz
 Color Temperature 3000K
 Lumen 200Lm
 Cri 80
 IP 65
 Dimensions L: 3.9cm W: 16cm H: 8cm
 Material Aluminium - Glass
 Color Brown / **Code E442**

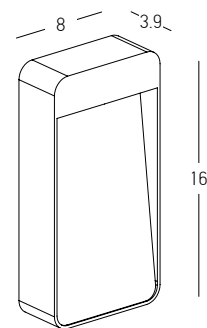



Power 6W
 Input 220-240V, 50/60Hz
 Color Temperature 3000K
 Lumen 200Lm
 Cri 80
 IP 65
 Dimensions L: 3.9cm W: 8cm H: 16cm
 Material Aluminium - Glass
 Color Brown / **Code E441**

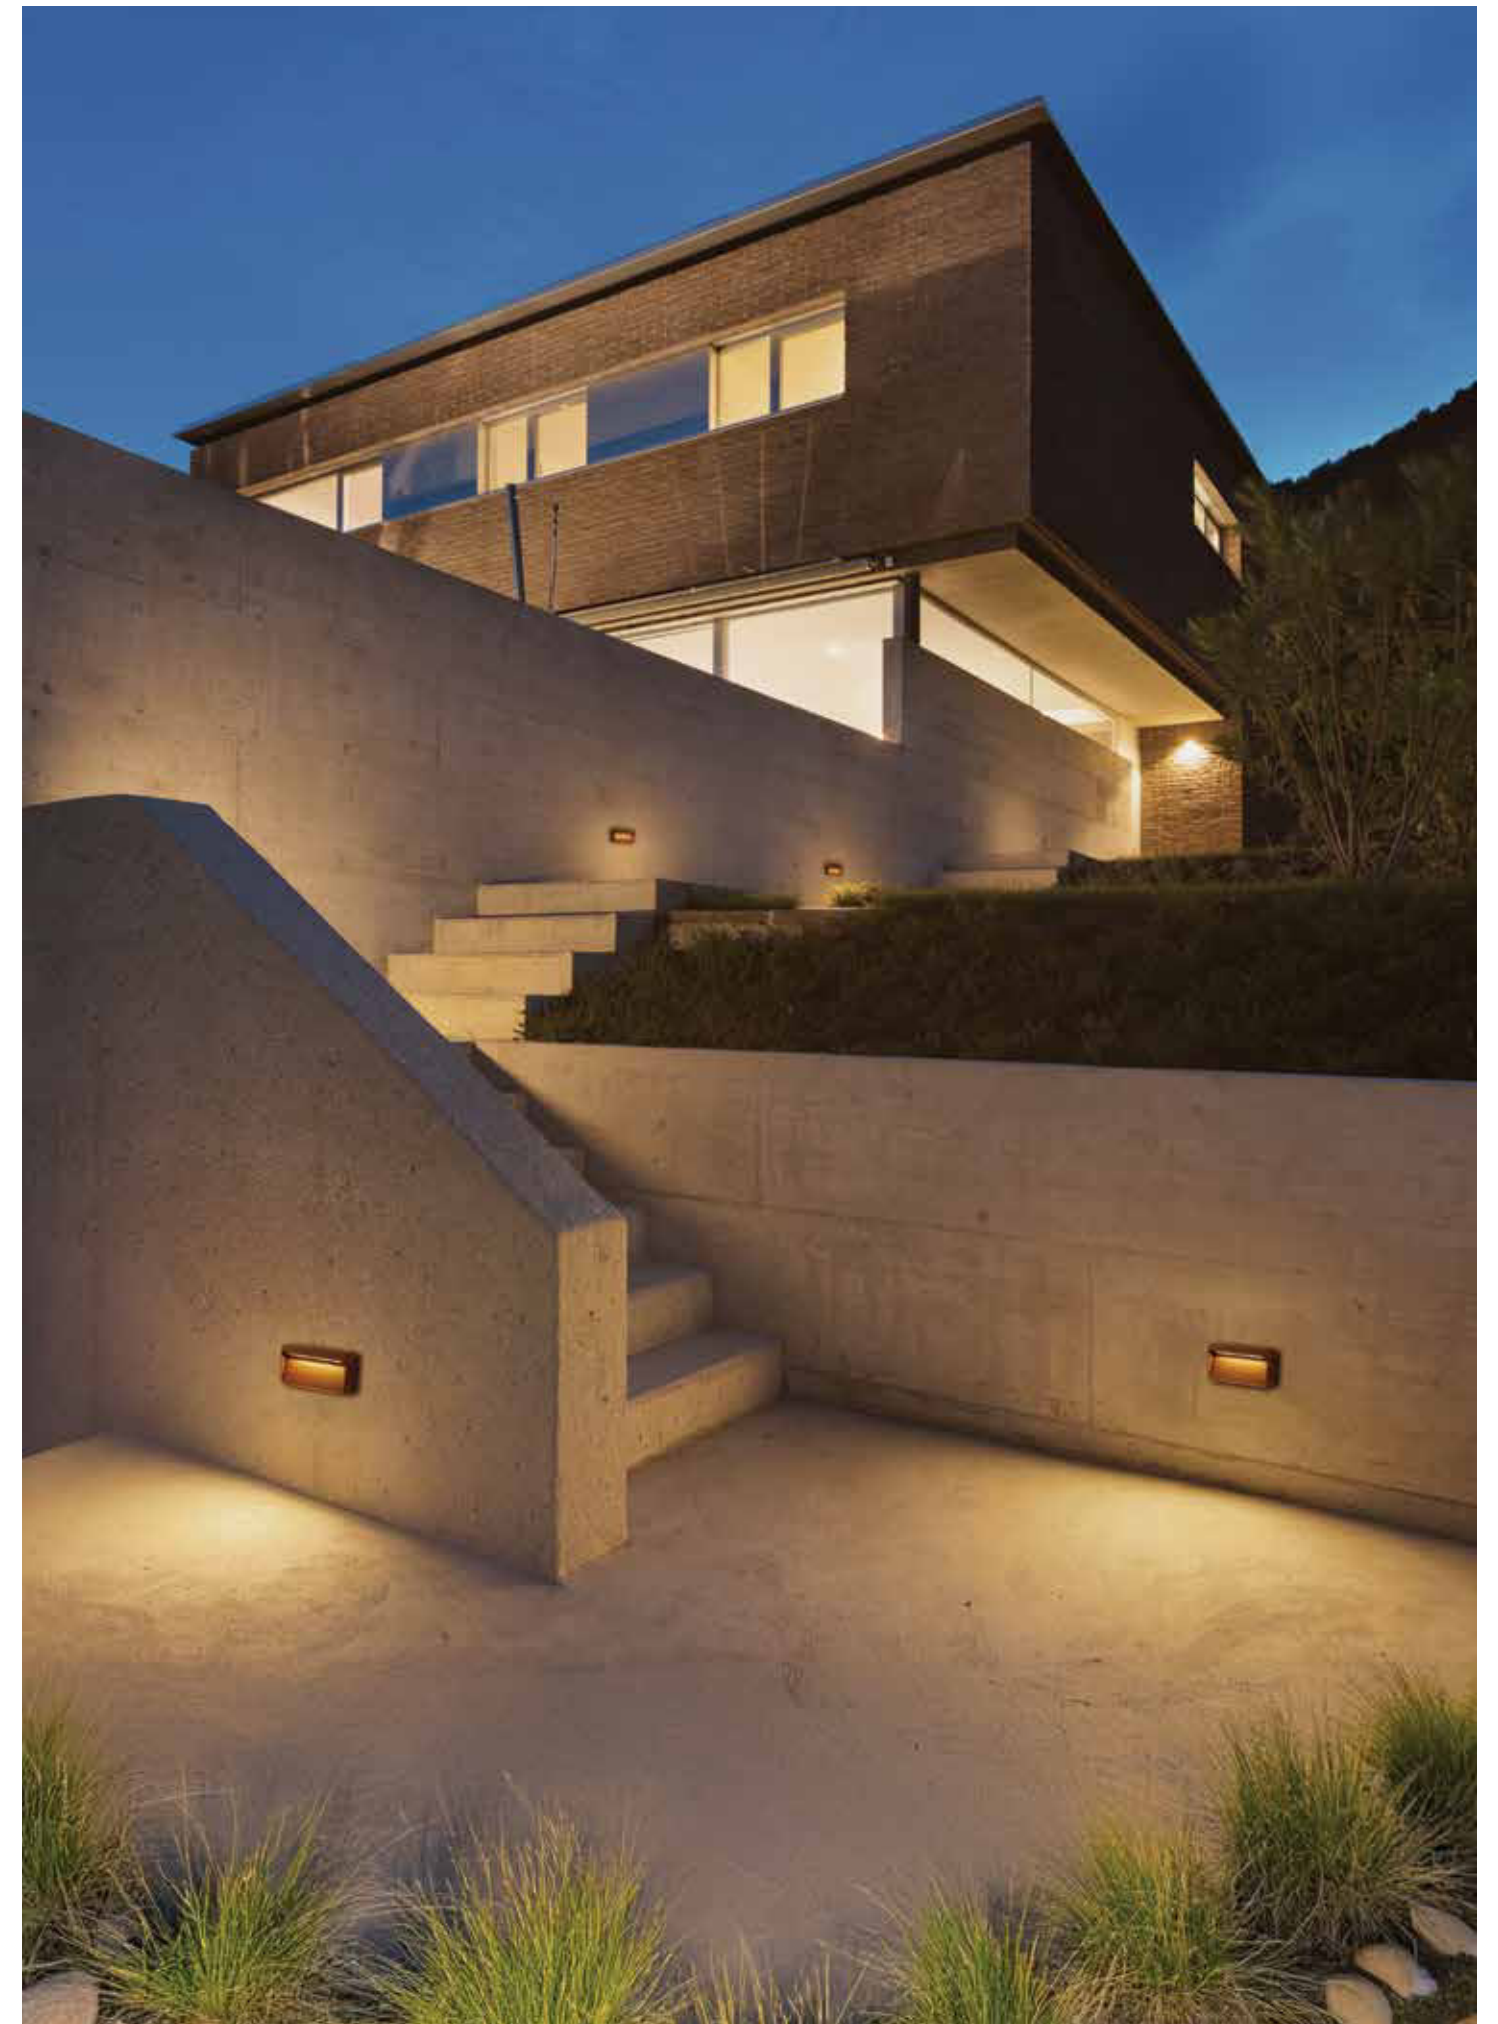

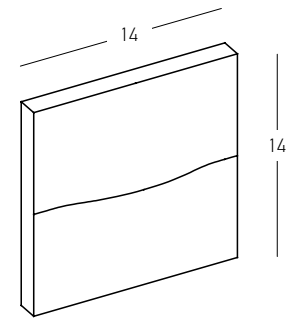


Power 3W
 Input 220-240V, 50/60Hz
 Color Temperature 3000K
 Lumen 185Lm
 Cri 80
 IP 65
 Dimensions L: 2.6cm W: 14cm H: 14cm
 Material Aluminium - PC Diffuser
 Color Graphite / **Code E450**
 Color Sandy White / **Code E451**
 Color Brown / **Code E452**



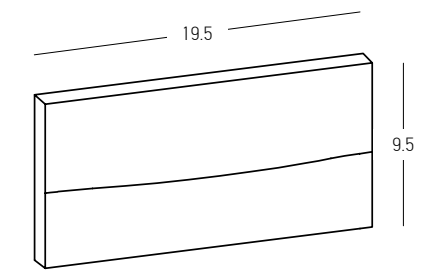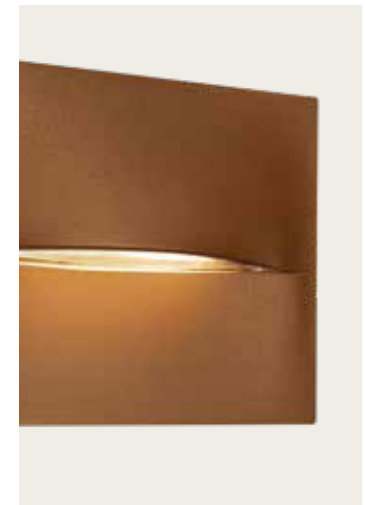


Power	4W
Input	220-240V, 50/60Hz
Color Temperature	3000K
Lumen	285Lm
Cri	80
IP	65
Dimensions	L: 1.5cm W: 19.5cm H: 9.5cm
Material	Aluminium - PC Diffuser
Color	Graphite / Code E453
Color	Sandy White / Code E454
Color	Brown / Code E455



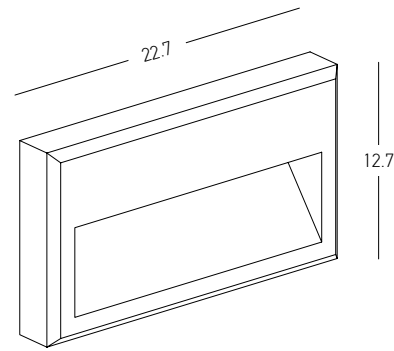


Power 6W
 Input 220-240V, 50/60Hz
 Color Temperature 3000K
 Lumen 420Lm
 Cri 80
 IP 65
 Dimensions L: 3.5cm W: 22.7cm H: 12.7cm
 Material Aluminium - Tempered Glass
 Color Graphite / **Code E347**


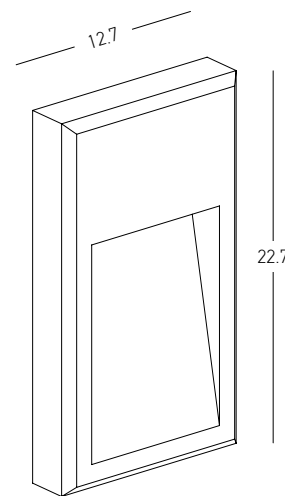


Power 6W
 Input 220-240V, 50/60Hz
 Color Temperature 3000K
 Lumen 420Lm
 Cri 80
 IP 65
 Dimensions L: 3.5cm W: 12.7cm H: 22.7cm
 Material Aluminium - Tempered Glass
 Color Graphite / **Code E346**



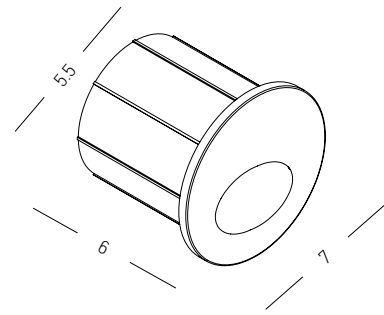


Power 3W
 Input 220-240V, 50/60Hz
 Color Temperature 3000K
 Lumen 133Lm
 Cri 90
 IP 65
 Dimensions Ø: 7cm L: 6.5cm
 Material Aluminium - Tempered Glass
 Depth Required 6cm
 Recessed Mounting Box Ø: 5.5cm L: 6cm (Included)
 Color Sandy White / **Code E320**

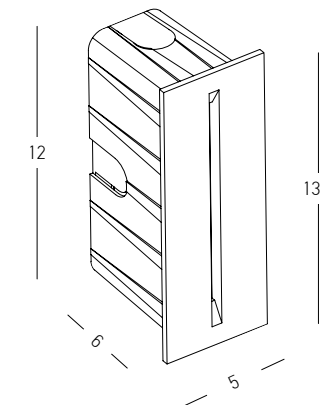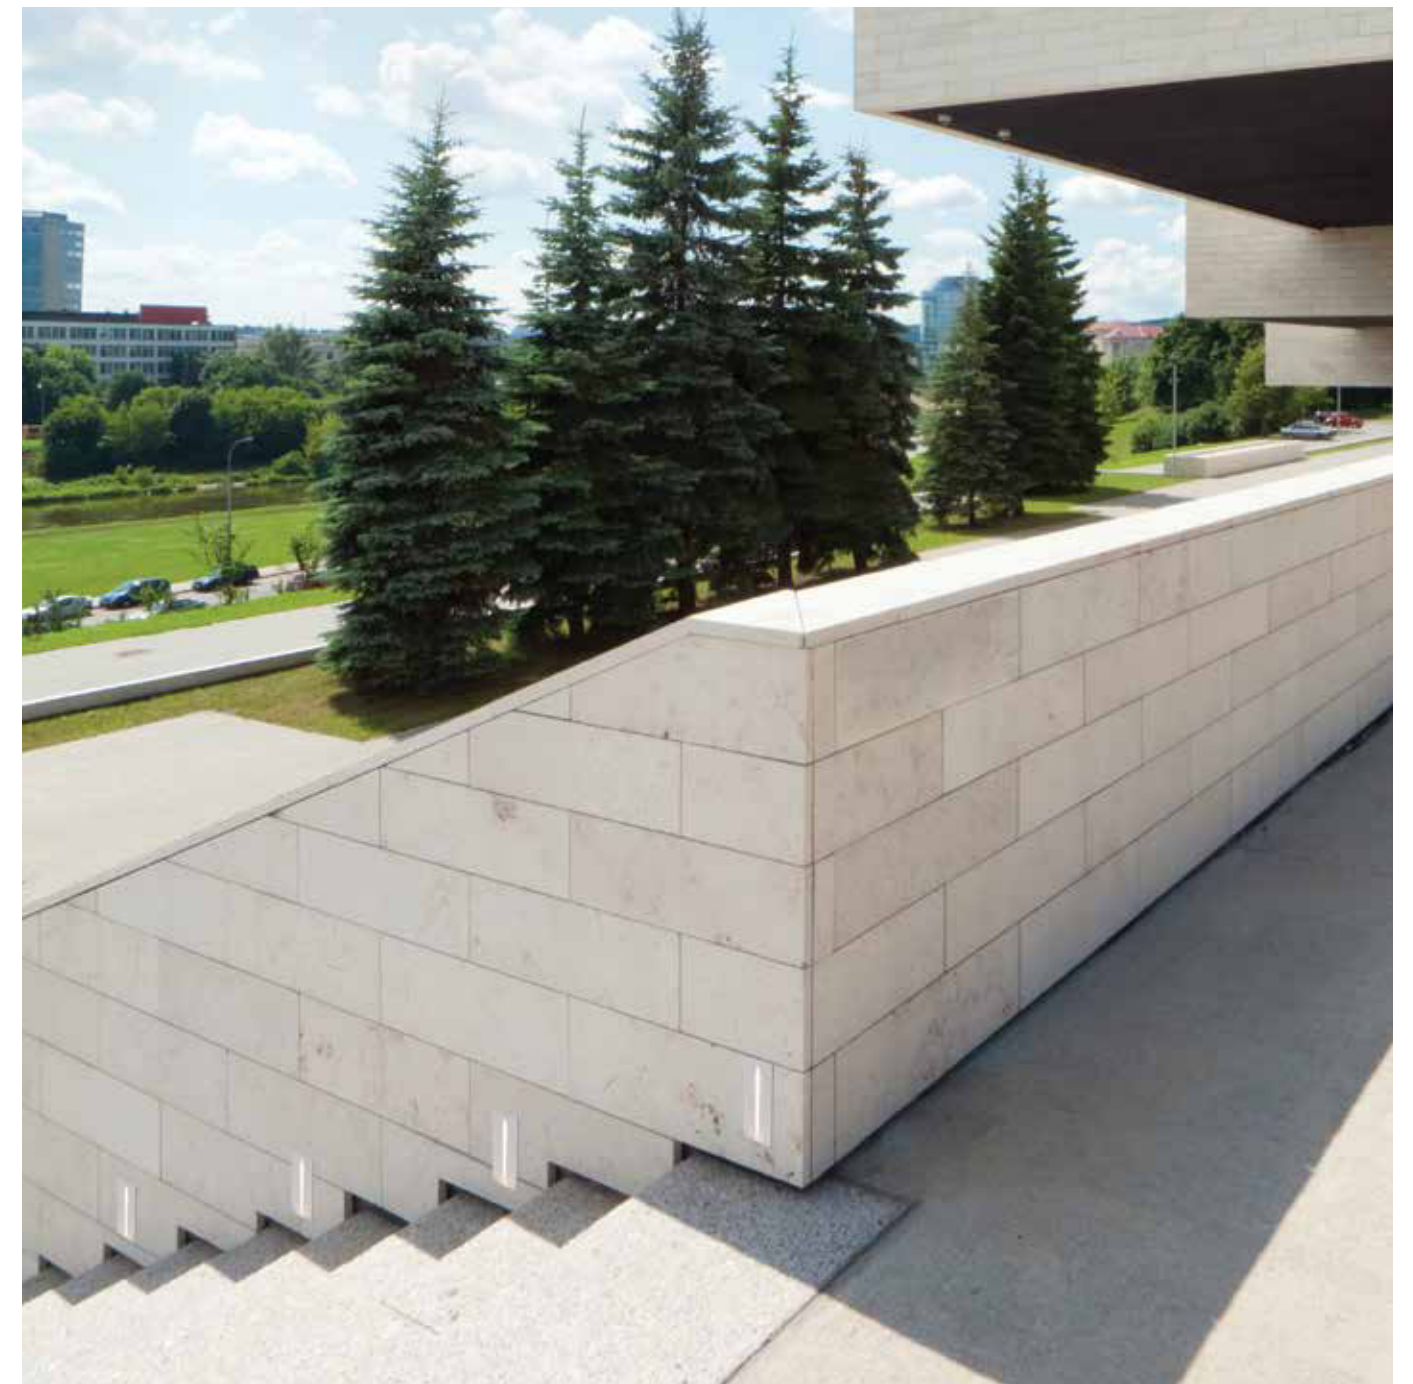


Power 3W
 Input 220-240V, 50/60Hz
 Color Temperature 3000K
 Lumen 92Lm
 Cri 90
 IP 65
 Dimensions L: 6.5cm W: 5cm H: 13.5cm
 Material Aluminium - Tempered Glass
 Depth Required 6cm
 Recessed Mounting Box L: 6cm W: 4.3cm H: 12.6cm (Included)
 Color Sandy White / **Code E322**



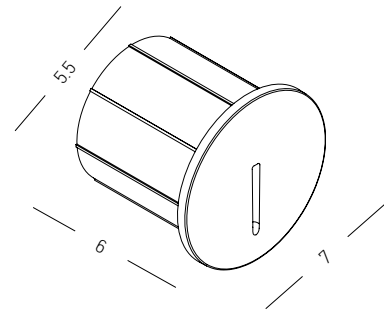


Power 3W
 Input 220-240V, 50/60Hz
 Color Temperature 3000K
 Lumen 92Lm
 Cri 90
 IP 65
 Dimensions Ø: 7cm L: 6.5cm
 Material Aluminium - Tempered Glass
 Depth Required 6cm
 Recessed Mounting Box Ø: 5.5cm L: 6cm (Included)
 Color Sandy White / **Code E321**

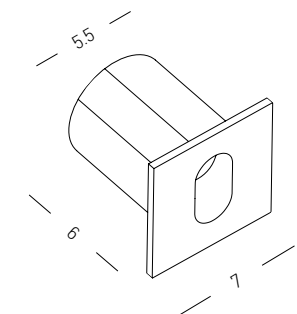


Power 3W
 Input 220-240V, 50/60Hz
 Color Temperature 3000K
 Lumen 133Lm
 Cri 90
 IP 65
 Dimensions L: 7.5cm W: 7cm H: 7cm
 Material Aluminium - Tempered Glass
 Depth Required 7cm
 Recessed Mounting Box Ø: 5.5cm L: 7cm (Included)
 Color Sandy White / **Code E319**




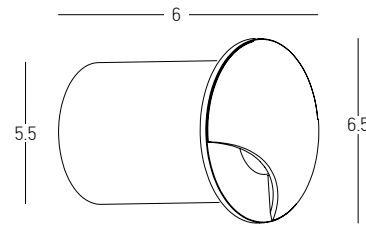


Power 3W
 Input 220-240V, 50/60Hz
 Color Temperature 3000K
 Lumen 230Lm
 Cri 90
 IP 65
 Dimensions Ø: 6.5cm L: 6cm
 Material Aluminium - PC Diffuser
 Depth Required 6cm
 Recessed Mounting Box Ø: 5.5cm L: 6cm (Included)
 Color Sandy Black / **Code E300**

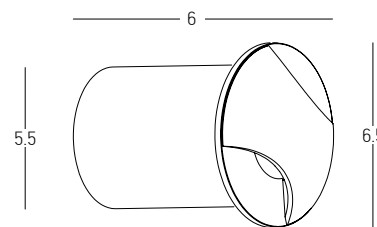


Power 3W
 Input 220-240V, 50/60Hz
 Color Temperature 3000K
 Lumen 290Lm
 Cri 90
 IP 65
 Dimensions Ø: 6.5cm L: 6cm
 Material Aluminium - PC Diffuser
 Depth Required 6cm
 Recessed Mounting Box Ø: 5.5cm L: 6cm (Included)
 Color Sandy Black / **Code E301**

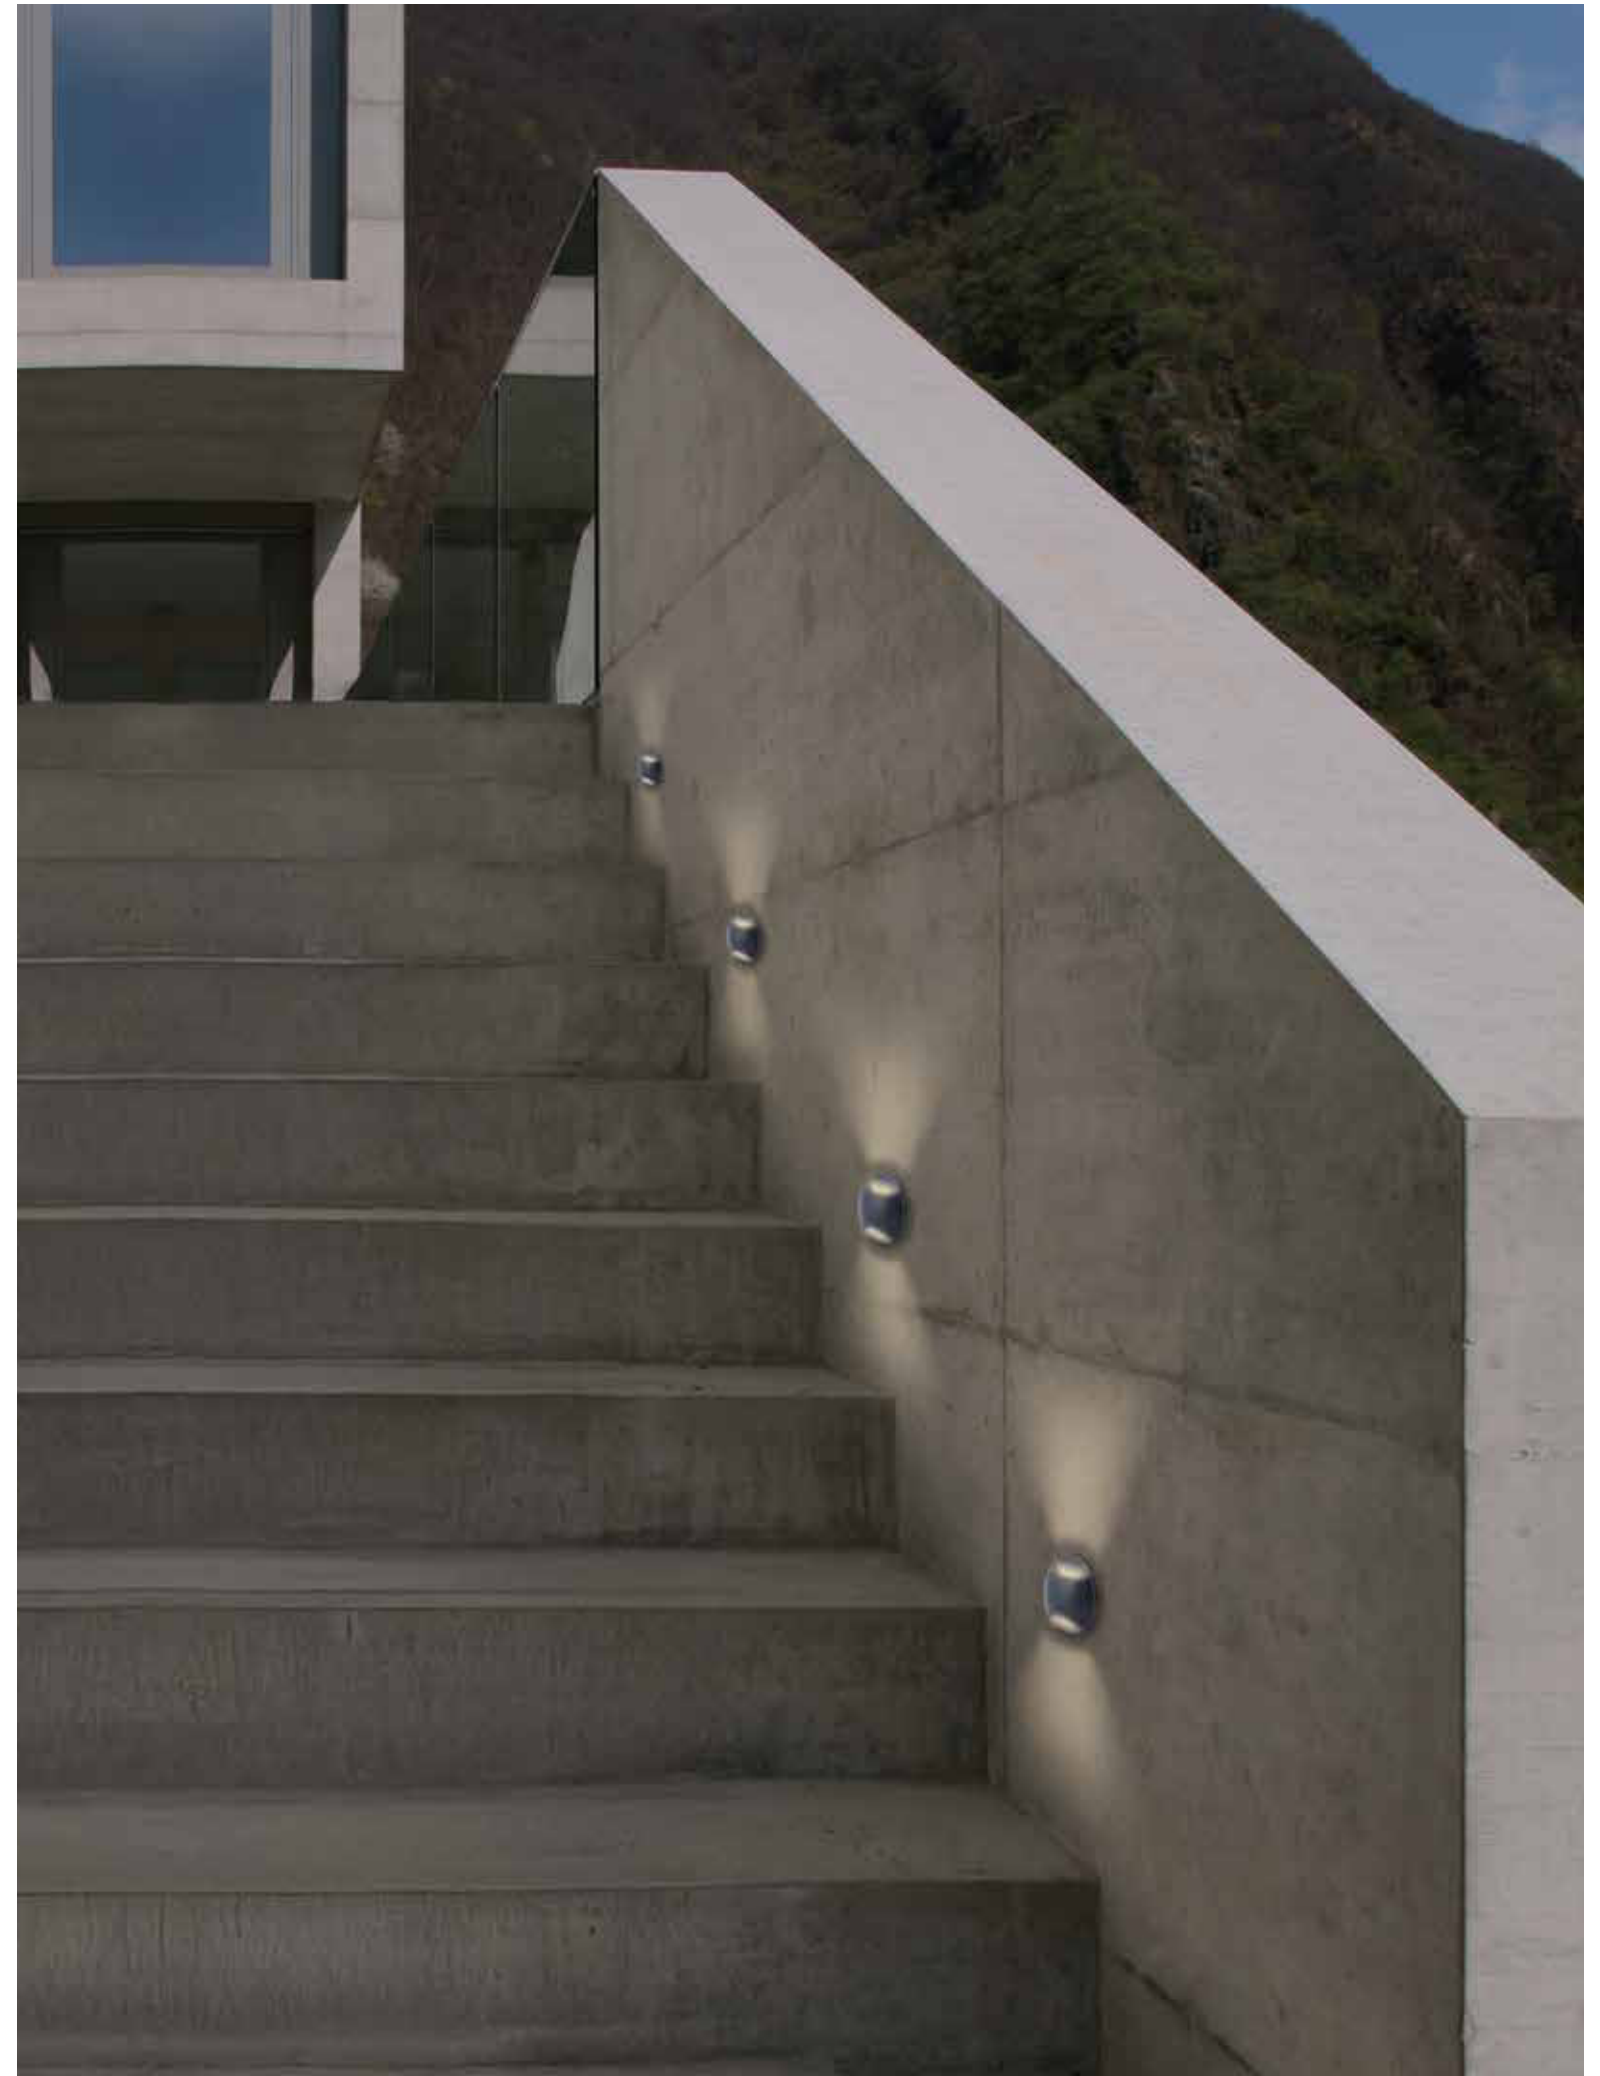

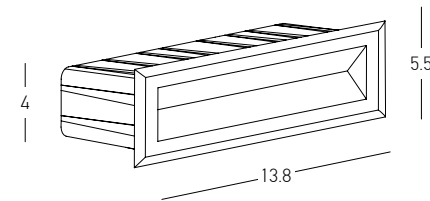


Power 5W
 Input 220-240V, 50/60Hz
 Color Temperature 3000K
 Lumen 302Lm
 Cri 80
 IP 65
 Dimensions L: 6.5cm W: 13.8cm H: 5.5cm
 Material Aluminium - Tempered Glass
 Depth Required 6cm
 Recessed Mounting Box L: 6cm W: 13cm H: 4cm (Included)
 Color Graphite / **Code E324**

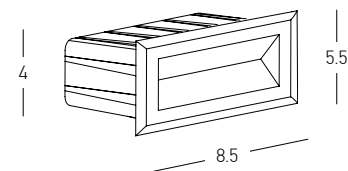

Power 3W
 Input 220-240V, 50/60Hz
 Color Temperature 3000K
 Lumen 195Lm
 Cri 80
 IP 65
 Dimensions L: 6.5cm W: 8.5cm H: 5.5cm
 Material Aluminium - Tempered Glass
 Depth Required 6cm
 Recessed Mounting Box L: 6cm W: 8cm H: 4cm (Included)


Color Graphite / **Code E323**



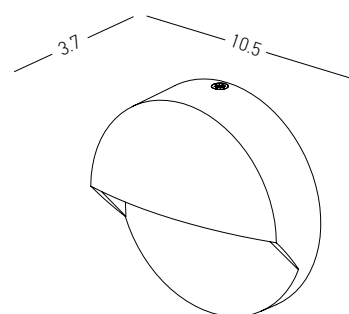


Power 2W
Input 220-240V, 50/60Hz
Color Temperature 3000K
Lumen 190Lm
Cri 80
IP 65
Dimensions Ø: 10.5cm L: 3.7cm
Material Aluminium - PC Diffuser
Color Graphite / **Code E294**



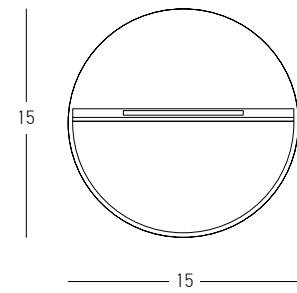



Power 7W
 Input 220-240V, 50/60Hz
 Color Temperature 3000K
 Lumen 480Lm
 Cri 80
 IP 65
 Dimensions Ø: 15cm L: 3.7cm
 Material Aluminium - PC Diffuser
 Color Graphite / **Code E242-G**
 Color Sandy White / **Code E242-W**

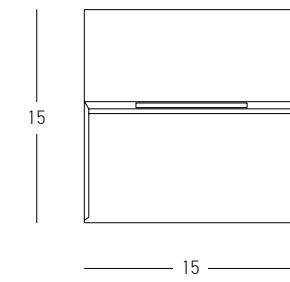


Power 7W
 Input 220-240V, 50/60Hz
 Color Temperature 3000K
 Lumen 480Lm
 Cri 80
 IP 65
 Dimensions L: 3.7cm W: 15cm H: 15cm
 Material Aluminium - PC Diffuser
 Color Graphite / **Code E241-G**
 Color Sandy White / **Code E241-W**



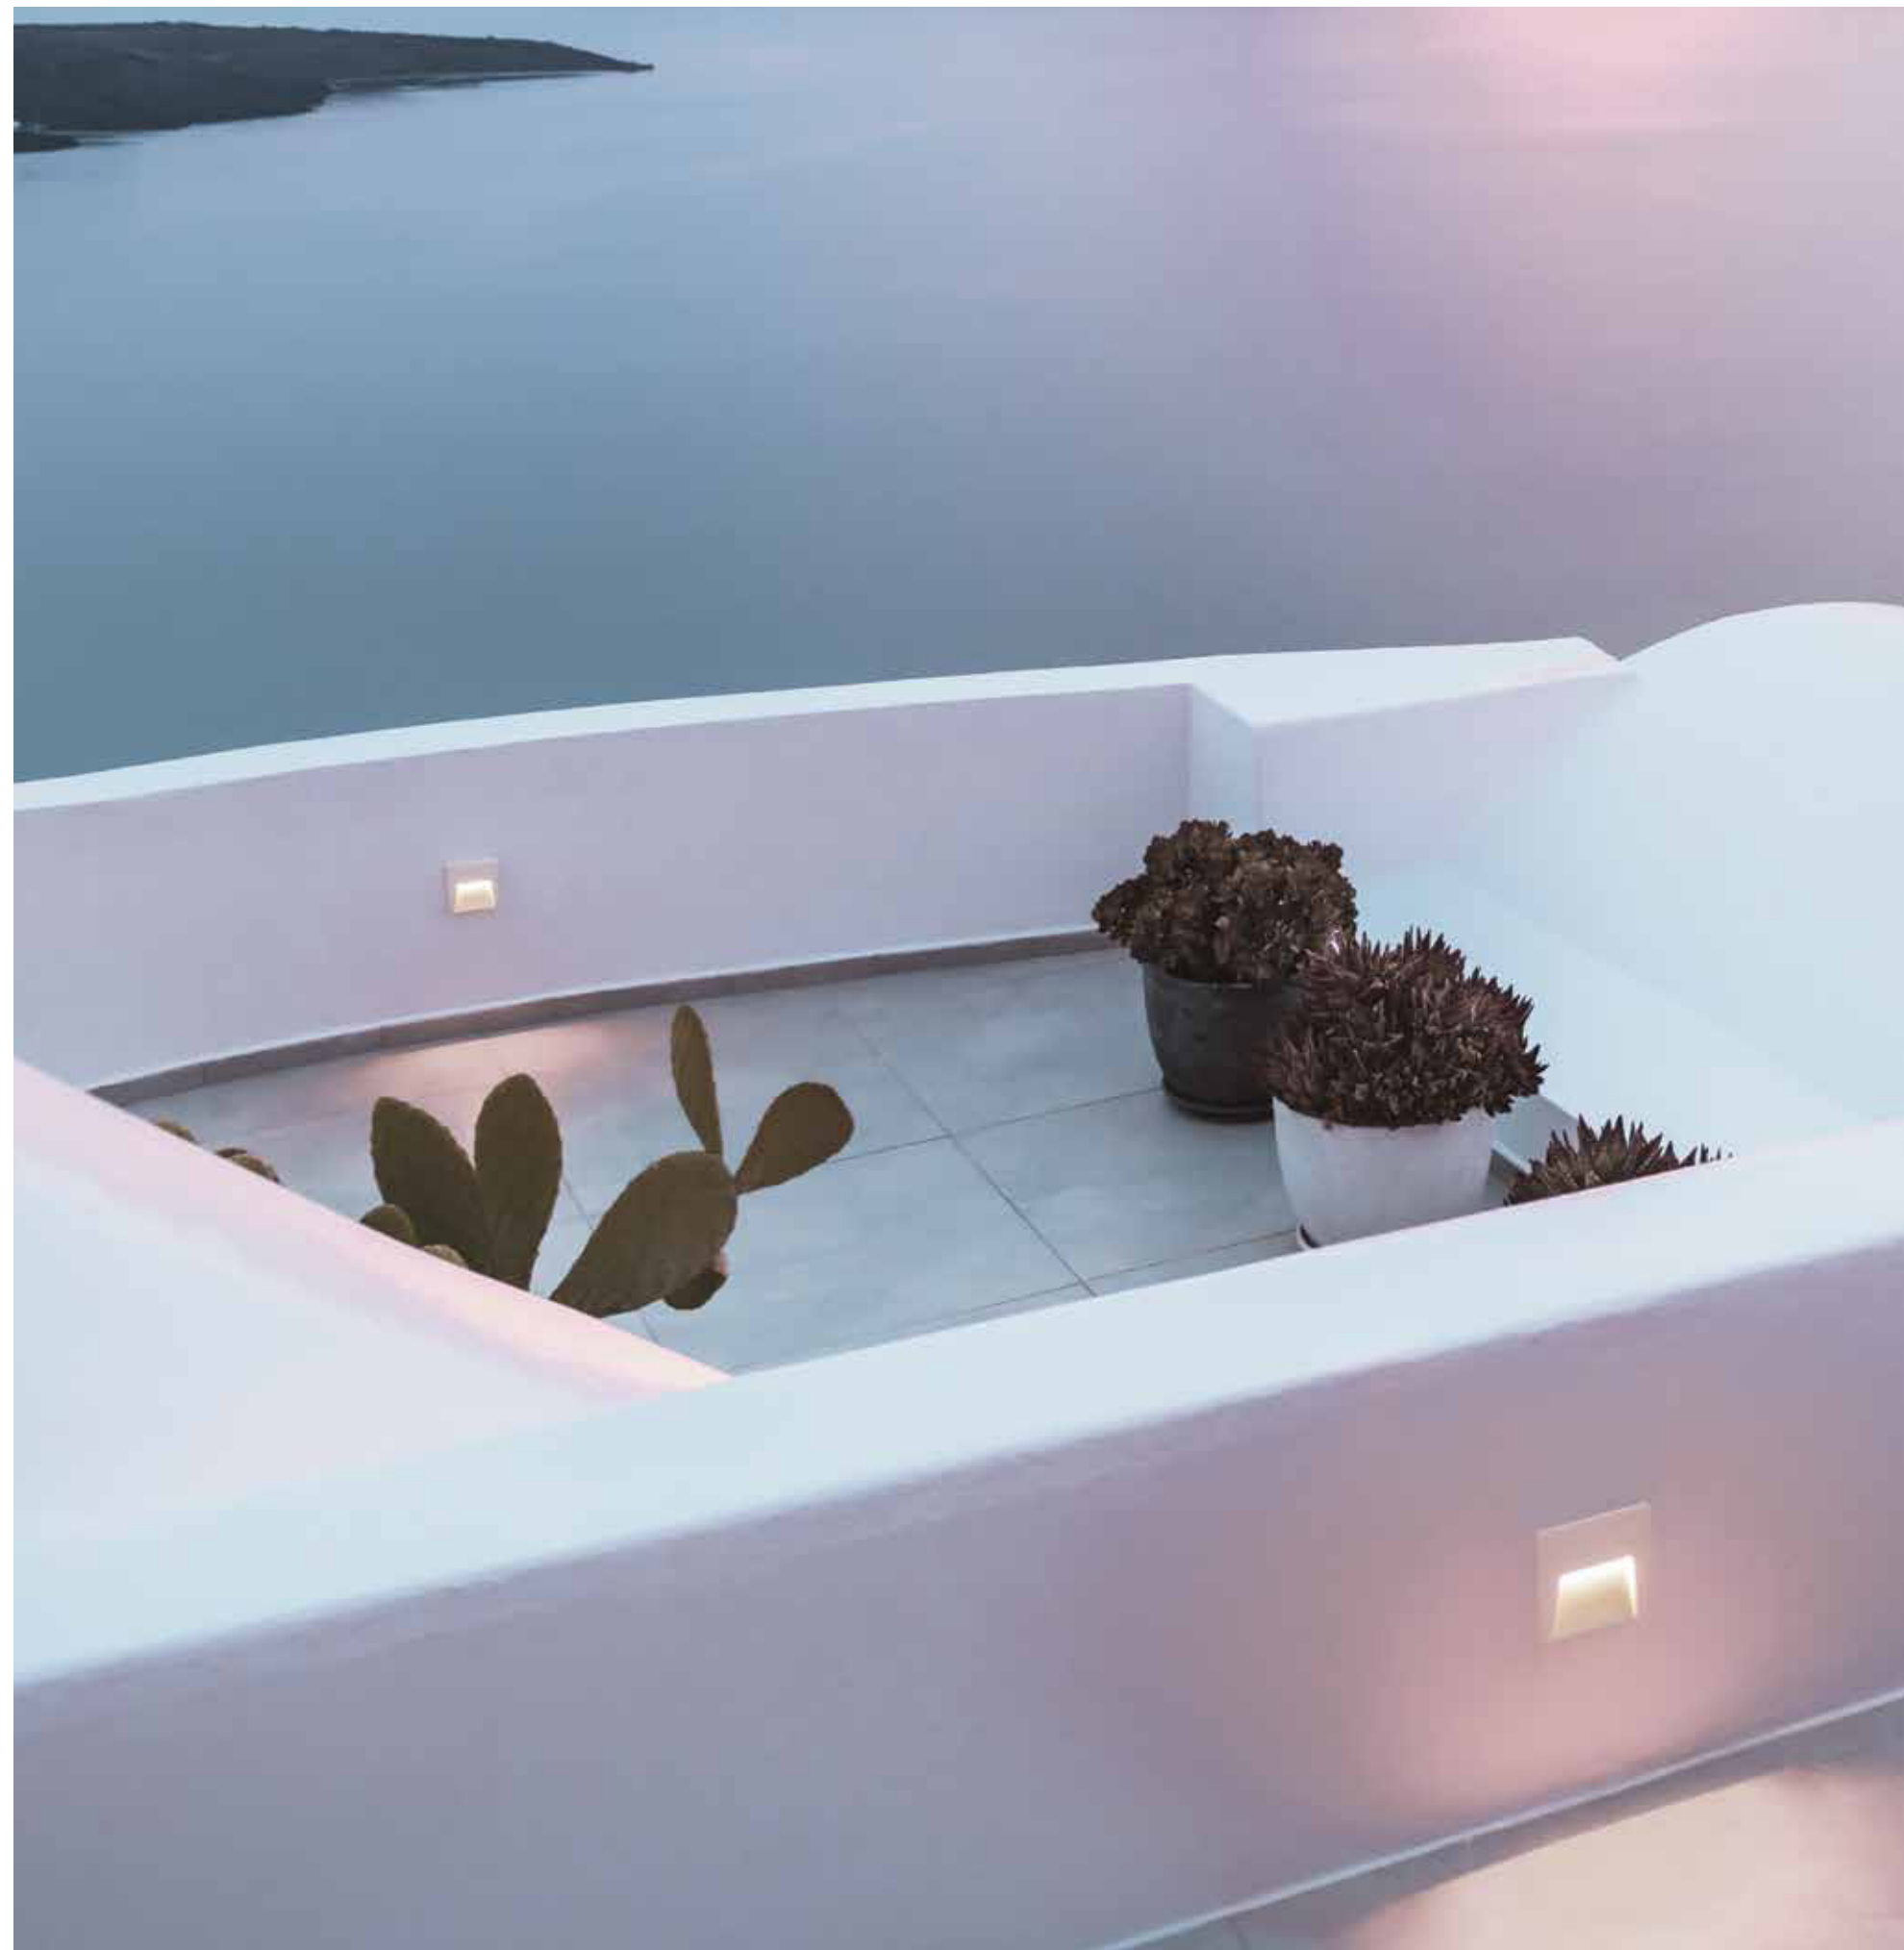


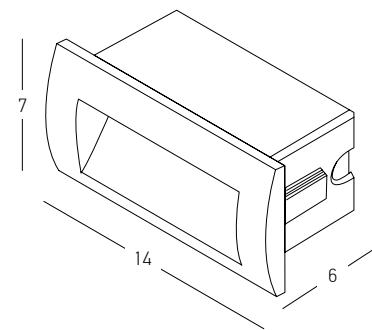


Power 4W
 Input 220-240V, 50/60Hz
 Color Temperature 3000K
 Lumen 188Lm
 Cri 80
 IP 65
 Dimensions L: 6cm W: 14cm H: 7cm
 Depth Required 6cm
 Material Aluminium - PC Diffuser
 Recessed Mounting Box L: 6cm W: 13cm H: 6cm (Included)
 Color Graphite / **Code E247-G**
 Color Sandy White / **Code E247-W**

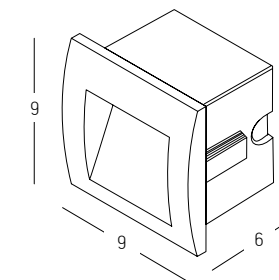


Power 2W
 Input 220-240V, 50/60Hz
 Color Temperature 3000K
 Lumen 65Lm
 Cri 80
 IP 65
 Dimensions L: 6cm W: 9cm H: 9cm
 Depth Required 6cm
 Material Aluminium - PC Diffuser
 Recessed Mounting Box L: 6cm W: 6cm H: 8cm (Included)
 Color Graphite / **Code E246-G**
 Color Sandy White / **Code E246-W**



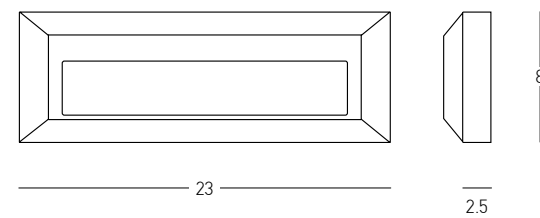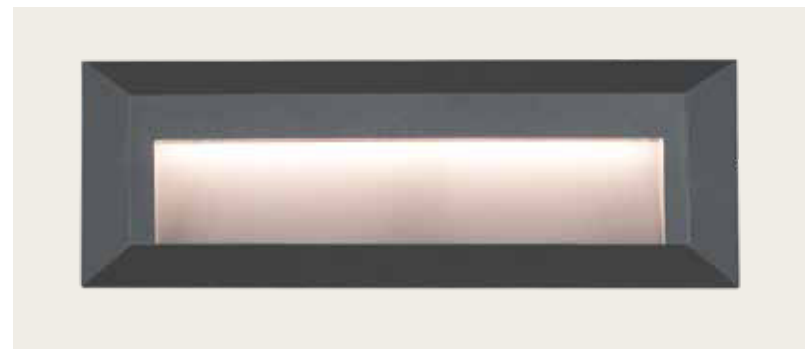


Power 3W
 Input 220-240V, 50/60Hz
 Color Temperature 3000K
 Lumen 132Lm
 Cri 80
 IP 65
 Dimensions L: 2.5cm W: 23cm H: 8cm
 Material ABS
 Color Graphite / **Code E229**

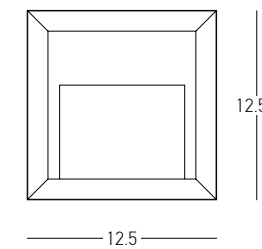


Power 2W
 Input 220-240V, 50/60Hz
 Color Temperature 3000K
 Lumen 69Lm
 Cri 80
 IP 65
 Dimensions L: 2.5cm W: 12.5cm H: 12.5cm
 Material ABS
 Color Graphite / **Code E230**



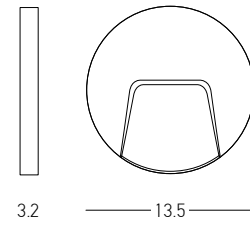


Power 3W
 Input 220-240V, 50/60Hz
 Color Temperature 3000K
 Lumen 92Lm
 Cri 80
 IP 54
 Dimensions Ø: 13.5cm L: 3.2cm
 Material ABS
 Color Graphite / **Code E183**
 Color White / **Code E184**

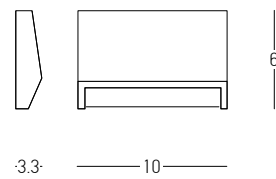

Power 2W
 Input 220-240V, 50/60Hz
 Color Temperature 3000K
 Lumen 88Lm
 Cri 80
 IP 54
 Dimensions L: 3.3cm W: 10cm H: 6cm
 Material ABS
 Color Graphite / **Code E181**
 Color White / **Code E182**



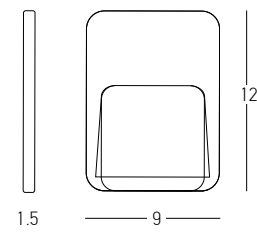



Power 1.5W
Input 220-240V, 50/60Hz
Color Temperature 3000K
Lumen 90Lm
Cri 80
IP 65
Dimensions L: 1.5cm W: 9cm H: 12cm
Material ABS - PC Diffuser
Color White / Code E187



IP-Rated Ceiling Lighting
All-weather performance.




07. CEILING

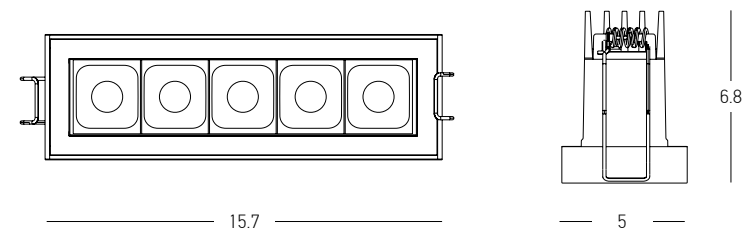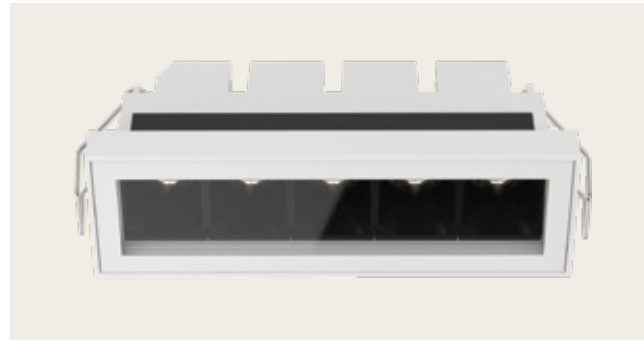


Power 12W
 Input 220-240V, 50/60Hz
 Color Temperature 3000K
 Lumen 757Lm
 Cri 90
 IP 65
 Dimensions L: 15.7cm W: 5cm H: 6.8cm
 Cutting Hole 14.2 x 3.5cm
 Beam Angle 40°
 Non Dimmable
 Material Stainless Steel - Aluminium - Tempered Glass
 Depth Required \Uparrow : 6cm
 Driver Included
 Color Sandy Black / **Code E332**
 Color Sandy White / **Code E333**






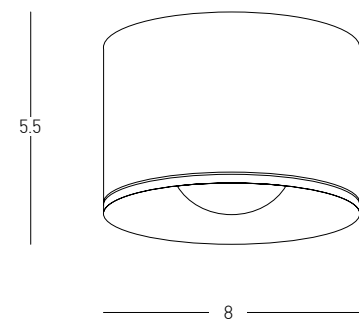

Power 12W
 Input 220-240V, 50/60Hz
 Color Temperature 3000K
 Lumen 561Lm
 Cri 90
 IP 54
 Dimensions Ø: 8cm H: 5.5cm
 Beam Angle 120°
 Material Aluminium
 Color Sandy Black / **Code S131**
 Color Sandy White / **Code S132**

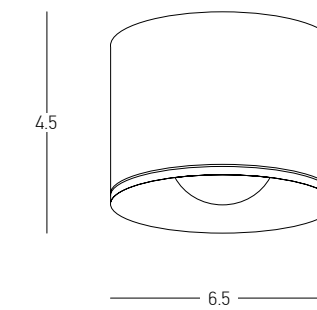


Power 8W
 Input 220-240V, 50/60Hz
 Color Temperature 3000K
 Lumen 454Lm
 Cri 80
 IP 54
 Dimensions Ø: 6.5cm H: 4.5cm
 Beam Angle 120°
 Material Aluminium
 Color Sandy Black / **Code S133**
 Color Sandy White / **Code S134**

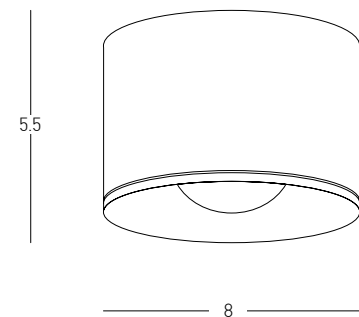


Power 12W
 Input 220-240V, 50/60Hz
 Color Temperature 4000K
 Lumen 593Lm
 Cri 90
 IP 54
 Dimensions Ø: 8cm H: 5.5cm
 Beam Angle 120°
 Material Aluminium
 Color Sandy Black / **Code S131-4K**
 Color Sandy White / **Code S132-4K**



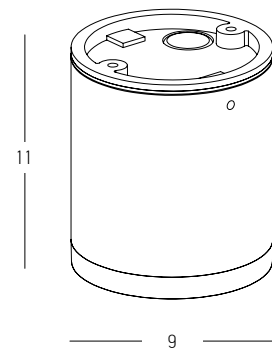


Power 8W
 Input 220-240V, 50/60Hz
 Color Temperature 3000K
 Lumen 597Lm
 Cri 80
 IP 65
 Dimensions Ø: 9cm H: 11cm
 Beam Angle 120°
 Material Aluminium - Tempered Glass
 Color Graphite / **Code E340**

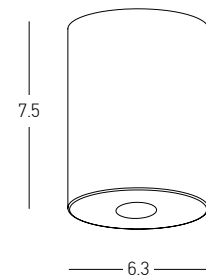


Power 6W
 Input 220-240V, 50/60Hz
 Color Temperature 3000K
 Lumen 500Lm
 Cri 90
 IP 54
 Dimensions Ø: 6.3cm H: 7.5cm
 Beam Angle 20°
 Material Aluminium - Glass
 Special Feature Driver Included
 Color Sandy Black / **Code S112**
 Color Sandy White / **Code S113**




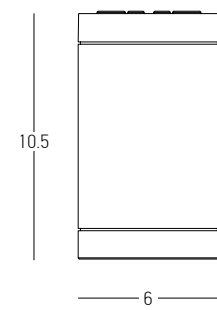


Bulb 1x GU10 LED
 Power 7W MAX
 Input 220-240V, 50/60Hz
 IP 54
 Dimensions Ø: 6cm H: 10.5cm
 Material Aluminium - Glass Diffuser
 Color Sandy Black / **Code E219**
 Color Sandy White / **Code E220**

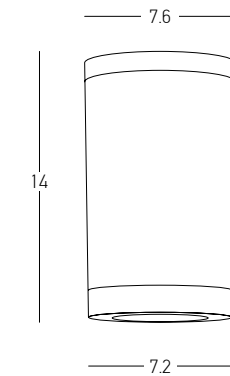


Bulb 1x GU10 LED
 Power 7W MAX
 Input 220-240V, 50/60Hz
 IP 54
 Dimensions Ø: 7.2-7.6cm H: 14cm
 Material ABS - Acrylic
 Color White Matt / **Code E308**
 Color Black Matt / **Code E309**

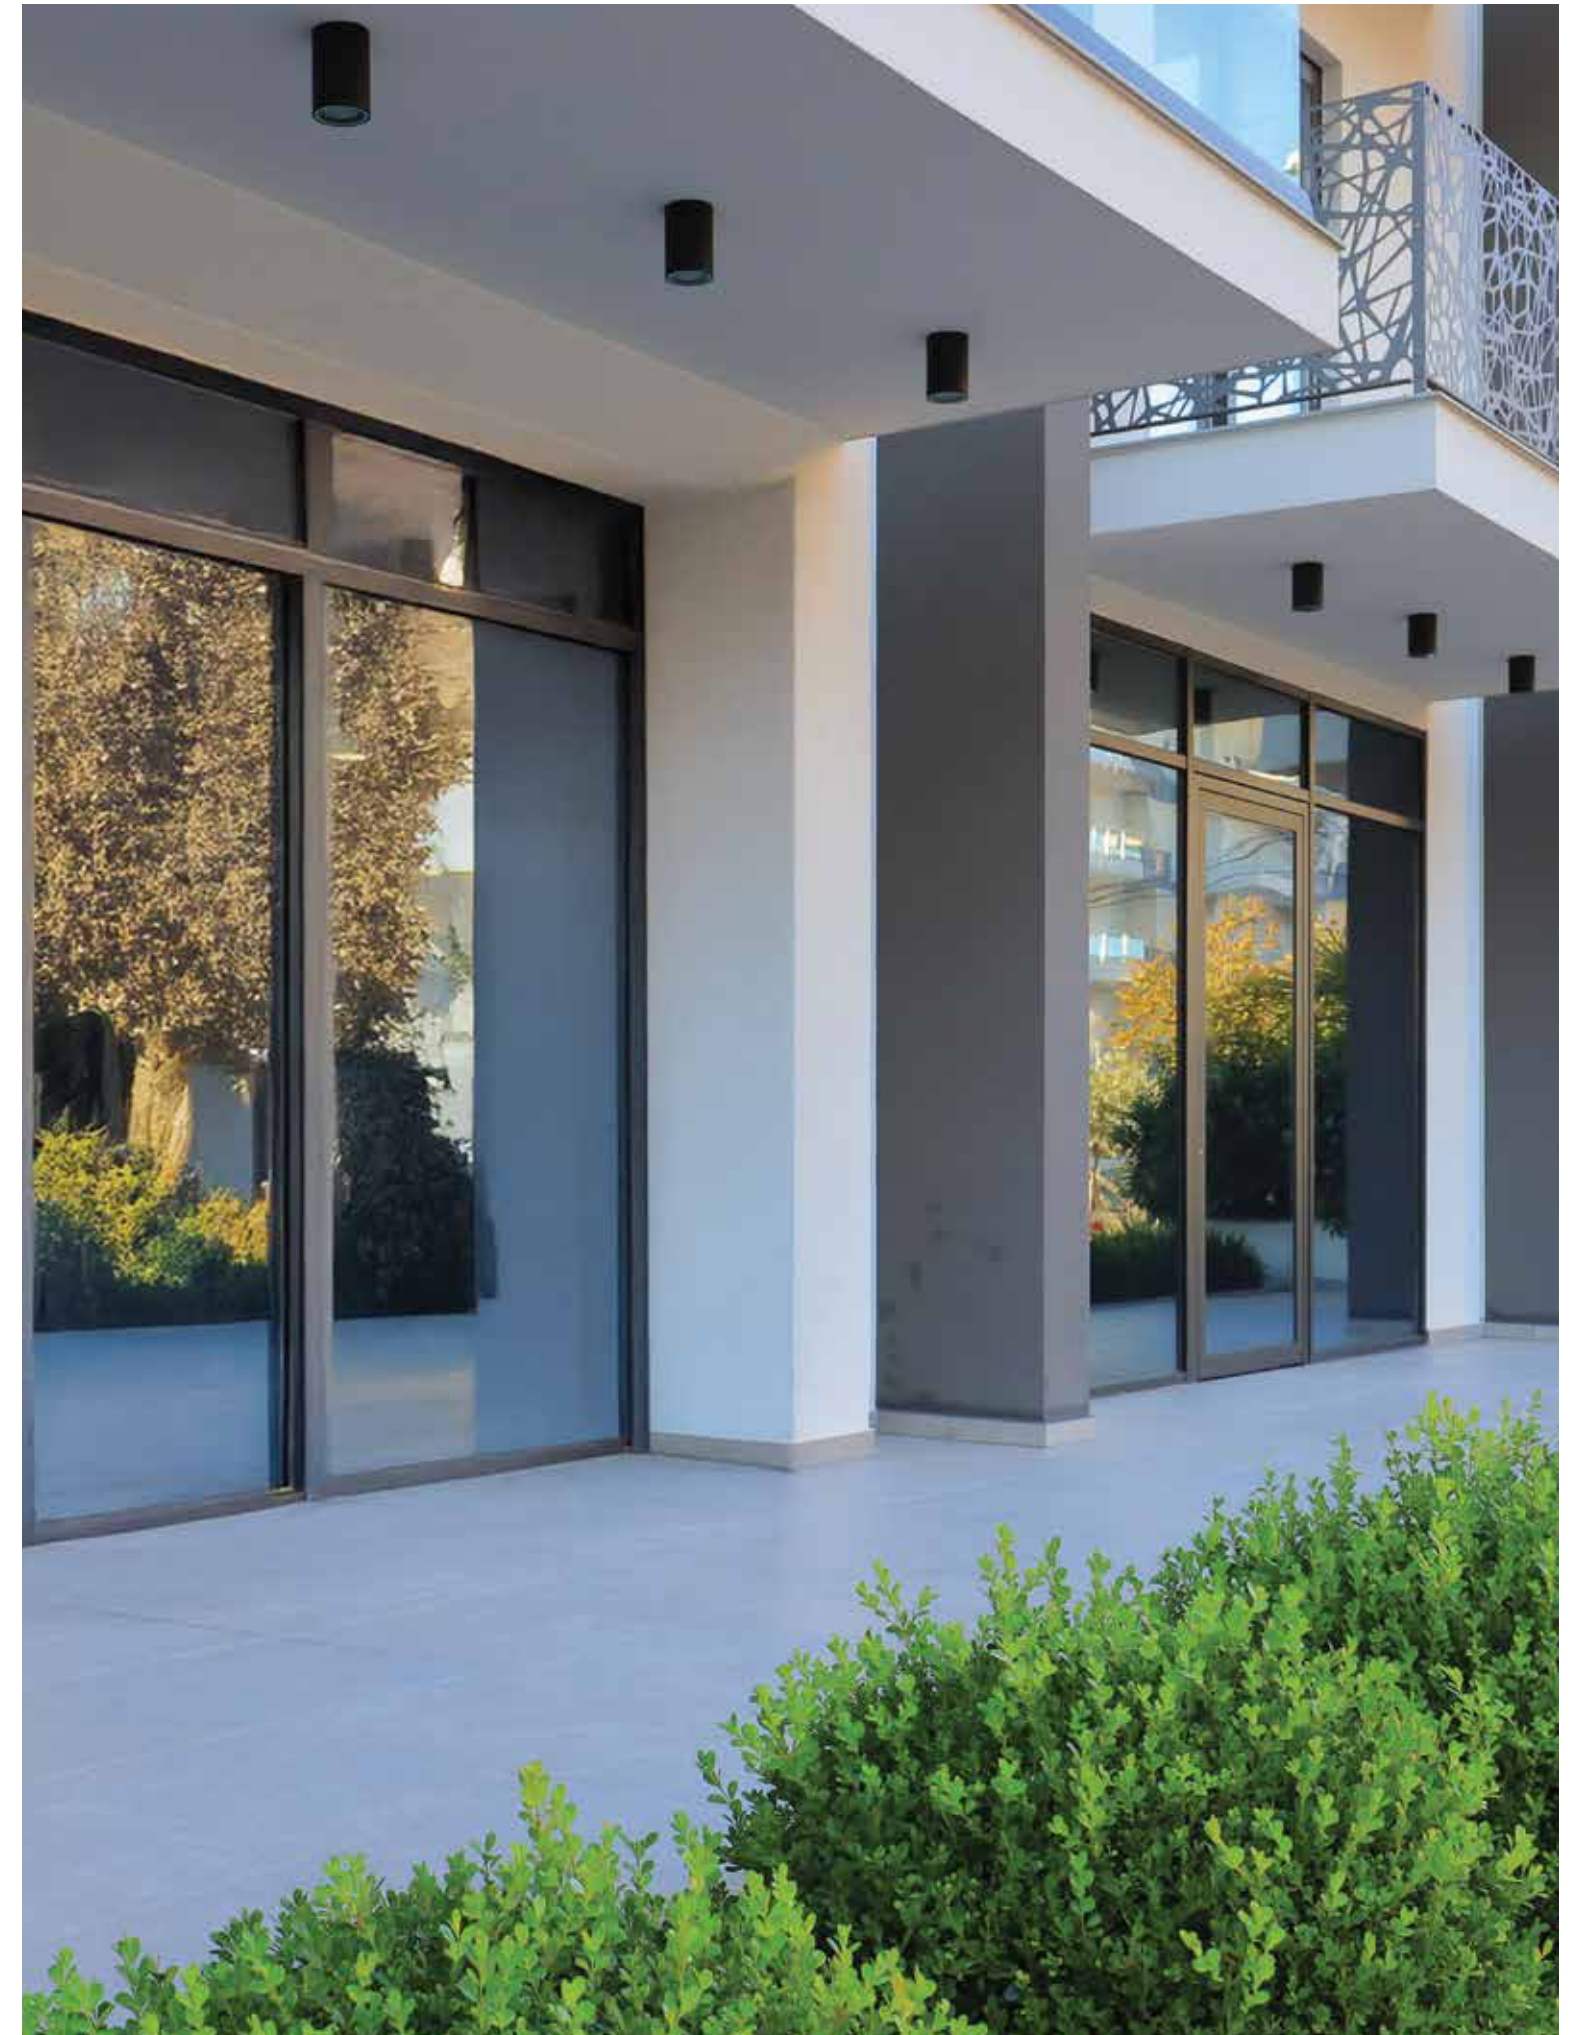

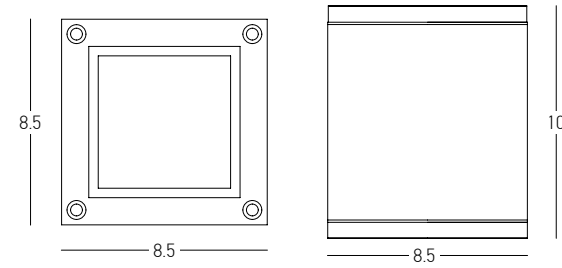


Bulb 1x GU10
 Power 35W MAX
 Input 220-240V, 50/60Hz
 IP 65
 Dimensions L: 8.5cm W: 8.5cm H: 10cm
 Material Aluminium - Glass
 Color Graphite / **Code E269**
 Color Sandy White / **Code E270**



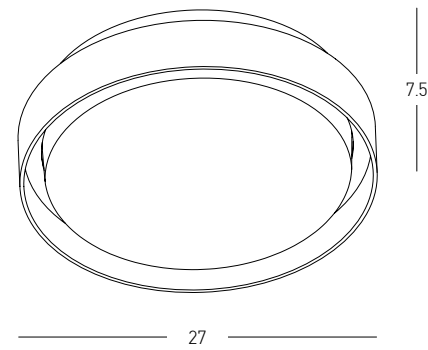

Power 20W
 Input 220-240V, 50/60Hz
 Color Temperature 3000K
 Lumen 2041Lm
 Cri 80
 IP 65
 Dimensions Ø: 27cm H: 7.5cm
 Material Aluminium - PC Diffuser
 Special Feature Driver Included
 Color Sandy White / **Code E326**
 Color Graphite / **Code E327**

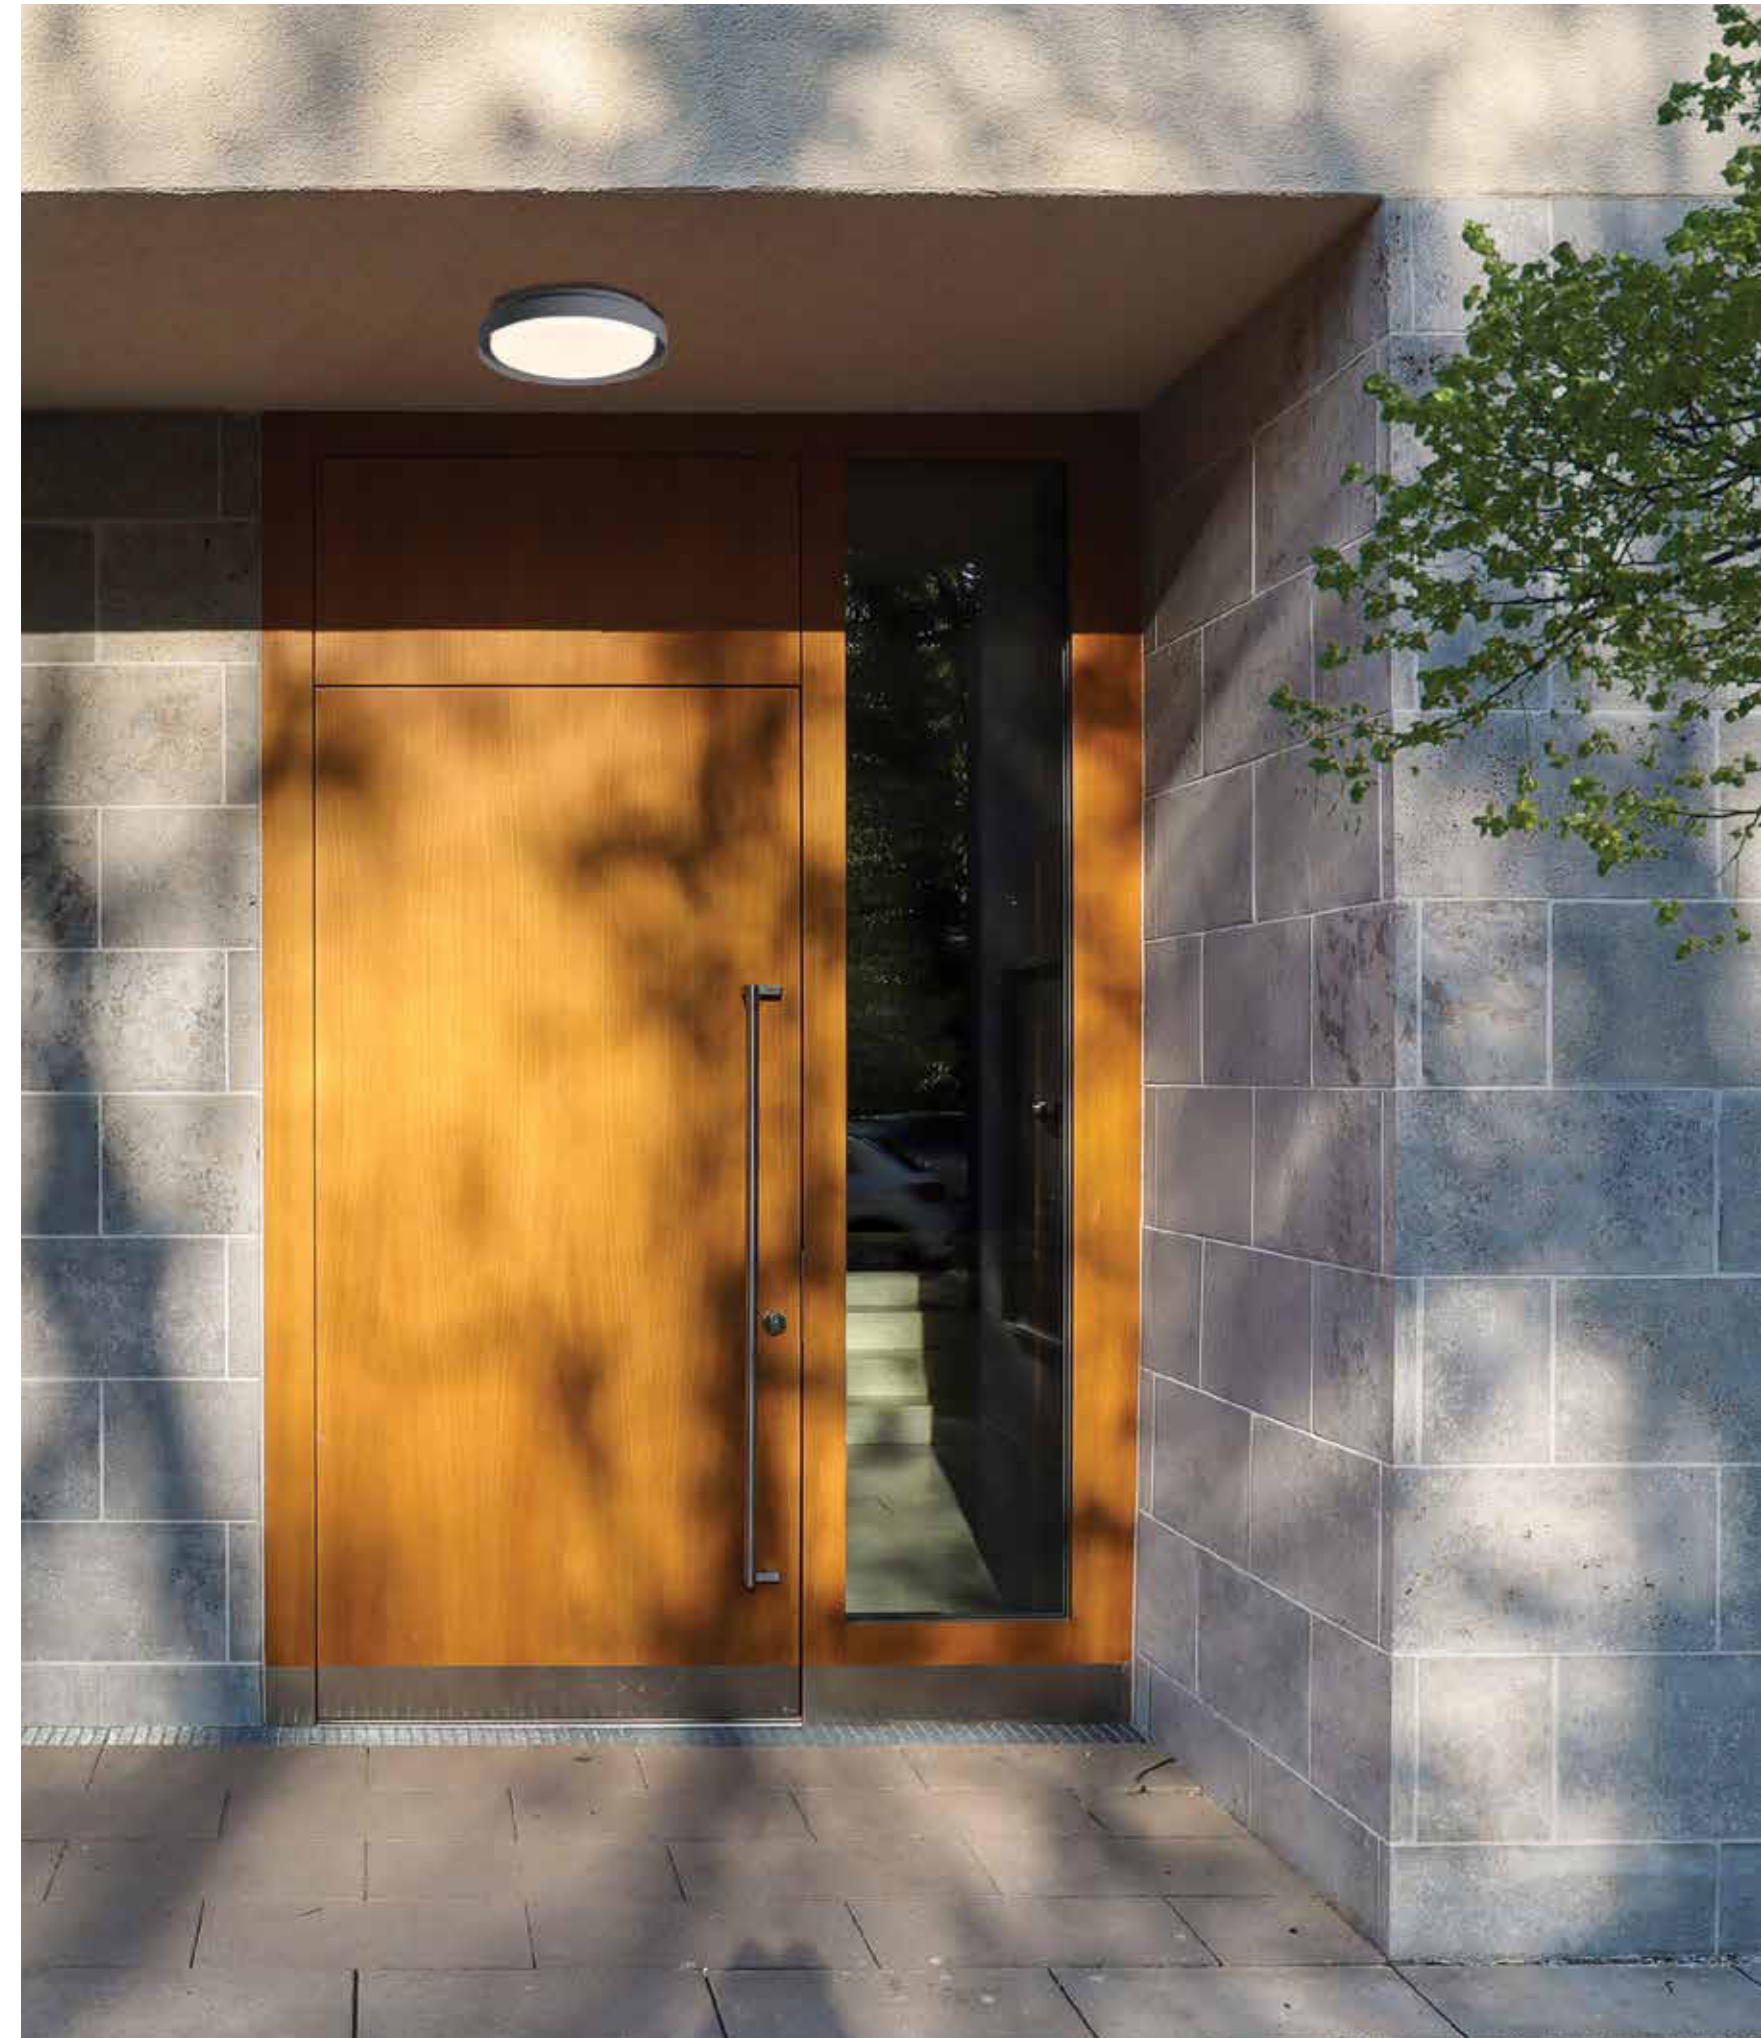


Discreet Integration
Inground lights with focused beam control.



08. INGROUND



Power 1W
 Input 24V
 Color Temperature 3000K
 Lumen 57Lm
 Cri 80
 IP 65
 IK 08
 Dimensions Ø: 3.5cm H: 5.2cm
 Beam Angle 15°
 Material Aluminium - Stainless Steel - Tempered Glass
 Depth Required 7cm
 Recessed Mounting Box Aluminium (Included)
 Recommended Driver LPH-18-24 (Not Included)
 In Parallel Connection 1-17 pcs
 Special Feature Honeycomb Included
 Color Stainless Steel / **Code E502**

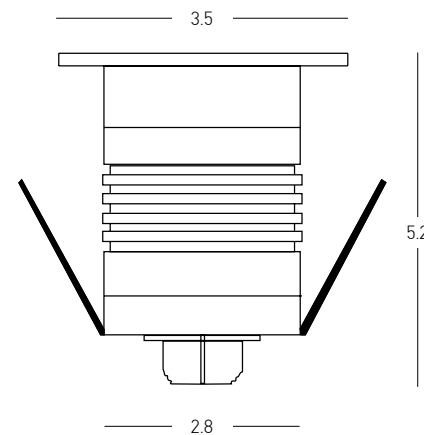

Power 1W
 Input 24V
 Color Temperature 2700K
 Lumen 51Lm
 Cri 80
 IP 65
 IK 08
 Dimensions Ø: 3.5cm H: 5.2cm
 Beam Angle 15°
 Material Aluminium - Stainless Steel - Tempered Glass
 Depth Required 7cm
 Recessed Mounting Box Aluminium (Included)
 Recommended Driver LPH-18-24 (Not Included)
 In Parallel Connection 1-17 pcs
 Special Feature Honeycomb Included
 Color Stainless Steel / **Code E503**




Driver
 Power 18W
 Input 220-240V, 50/60Hz
 Output 24V
 Dimensions L: 14cm W: 3cm H: 2.2cm
 IP 67






Power 3W
 Input 24V
 Color Temperature 3000K
 Lumen 230Lm
 Cri 80
 IP 65
 IK 08
 Dimensions Ø: 4.5cm H: 5.6cm
 Beam Angle 24°
 Material Aluminium - Stainless Steel - Tempered Glass
 Depth Required 7.5cm
 Recessed Mounting Box Aluminium (Included)
 Recommended Driver LPH-18-24 (Not Included)
 In Parallel Connection 1-5 pcs
 Special Feature Honeycomb Included
 Color Stainless Steel / **Code E504**

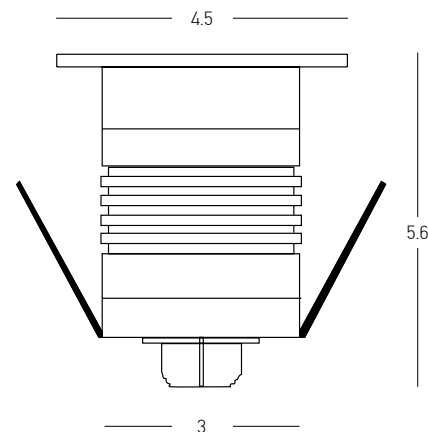

Power 3W
 Input 24V
 Color Temperature 3000K
 Lumen 230Lm
 Cri 80
 IP 65
 IK 08
 Dimensions Ø: 4.5cm H: 5.6cm
 Beam Angle 10°
 Material Aluminium - Stainless Steel - Tempered Glass
 Depth Required 7.5cm
 Recessed Mounting Box Aluminium (Included)
 Recommended Driver LPH-18-24 (Not Included)
 In Parallel Connection 1-5 pcs
 Special Feature Honeycomb Included
 Color Stainless Steel / **Code E506**

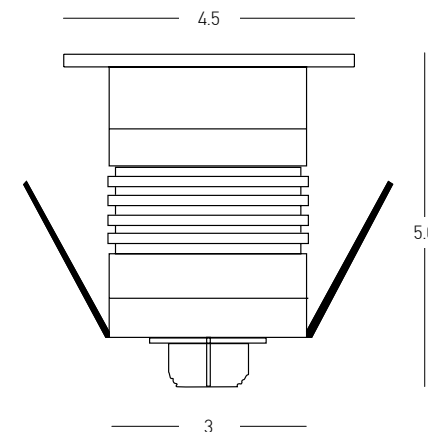

Power 3W
 Input 24V
 Color Temperature 2700K
 Lumen 218Lm
 Cri 80
 IP 65
 IK 08
 Dimensions Ø: 4.5cm H: 5.6cm
 Beam Angle 24°
 Material Aluminium - Stainless Steel - Tempered Glass
 Depth Required 7.5cm
 Recessed Mounting Box Aluminium (Included)
 Recommended Driver LPH-18-24 (Not Included)
 In Parallel Connection 1-5 pcs
 Special Feature Honeycomb Included
 Color Stainless Steel / **Code E505**



Driver LPH-18-24
 Power 18W
 Input 220-240V, 50/60Hz
 Output 24V
 Dimensions L: 14cm W: 3cm H: 2.2cm
 IP 67




Power 3W
 Input 24V
 Color Temperature 2700K
 Lumen 218Lm
 Cri 80
 IP 65
 IK 08
 Dimensions Ø: 4.5cm H: 5.6cm
 Beam Angle 10°
 Material Aluminium - Stainless Steel - Tempered Glass
 Depth Required 7.5cm
 Recessed Mounting Box Aluminium (Included)
 Recommended Driver LPH-18-24 (Not Included)
 In Parallel Connection 1-5 pcs
 Special Feature Honeycomb Included
 Color Stainless Steel / **Code E507**




Driver LPH-18-24
 Power 18W
 Input 220-240V, 50/60Hz
 Output 24V
 Dimensions L: 14cm W: 3cm H: 2.2cm
 IP 67



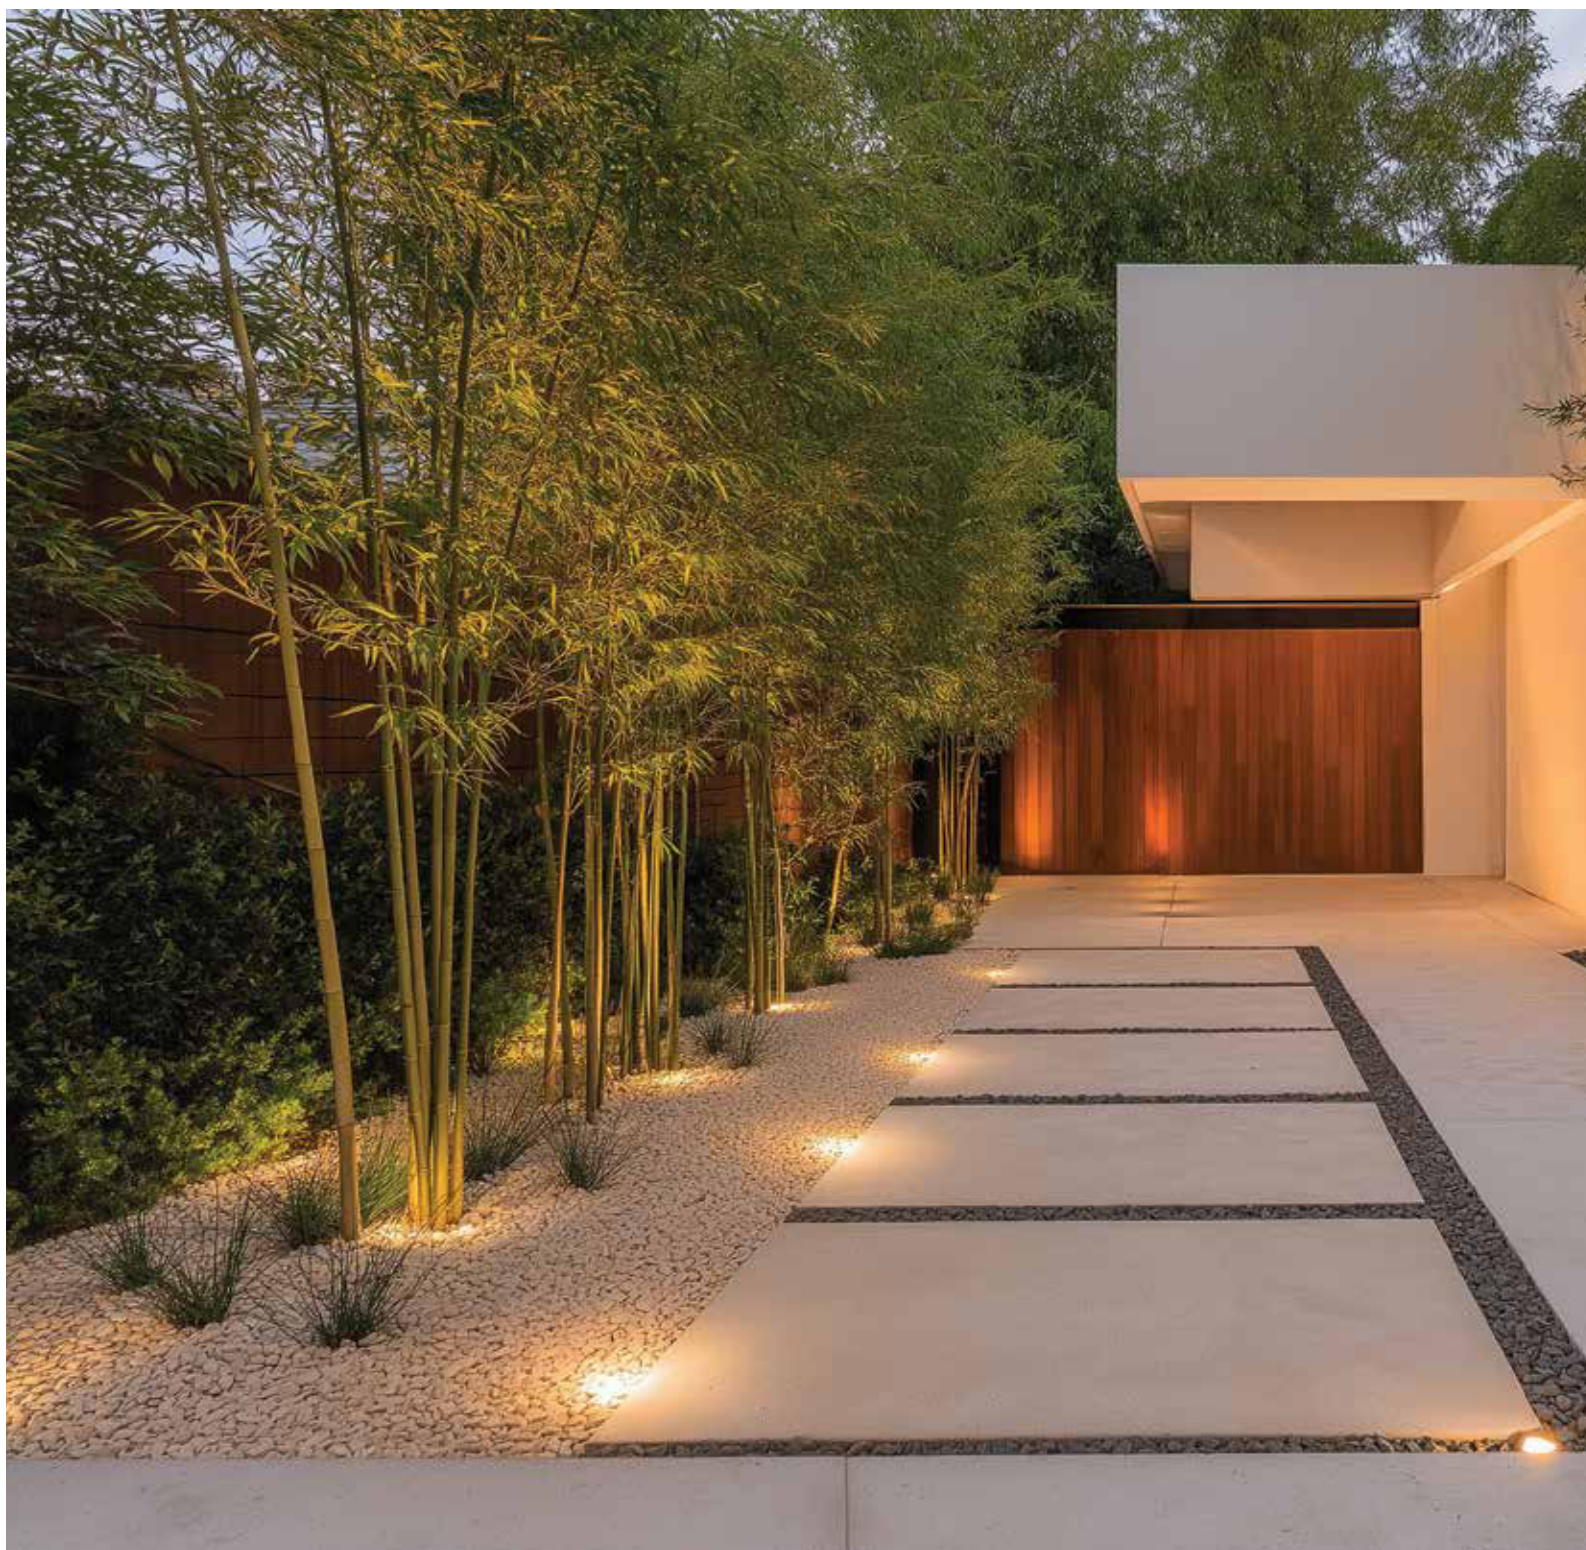

Power 5W
 Input 24V
 Color Temperature 3000K
 Lumen 345Lm
 Cri 80
 IP 65
 IK 08
 Dimensions Ø: 4.5cm H: 5.6cm
 Beam Angle 24°
 Material Aluminium - Stainless Steel - Tempered Glass
 Depth Required 7.5cm
 Recessed Mounting Box Aluminium (Included)
 Recommended Driver LPH-18-24 (Not Included)
 In Parallel Connection 1-3 pcs
 Honeycomb Included

Special Feature
 Color Stainless Steel / **Code E510**

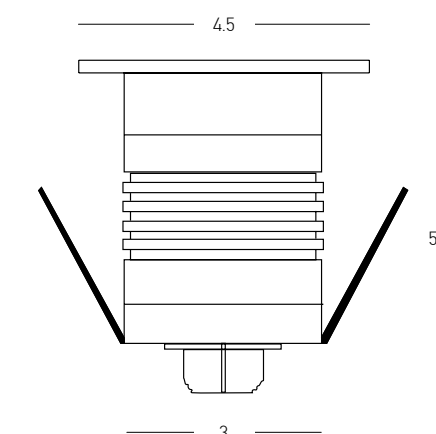

Power 5W
 Input 24V
 Color Temperature 2700K
 Lumen 324Lm
 Cri 80
 IP 65
 IK 08
 Dimensions Ø: 4.5cm H: 5.2cm
 Beam Angle 24°
 Material Aluminium - Stainless Steel - Tempered Glass
 Depth Required 7.5cm
 Recessed Mounting Box Aluminium (Included)
 Recommended Driver LPH-18-24 (Not Included)
 In Parallel Connection 1-3 pcs
 Honeycomb Included


Special Feature
 Color Stainless Steel / **Code E511**



Driver **LPH-18-24**
 Power 18W
 Input 220-240V, 50/60Hz
 Output 24V
 Dimensions L: 14cm W: 3cm H: 2.2cm
 IP 67




Power 3W
 Input 24V
 Color Temperature 3000K
 Lumen 230Lm
 Cri 80
 IP 65
 IK 08
 Dimensions Ø: 6.5cm H: 7.5cm
 Beam Angle 10x60°
 Material Aluminium - Stainless Steel - Tempered Glass
 Depth Required 11: 8cm
 Recessed Mounting Box Aluminium (Included)
 Recommended Driver LPH-18-24 (Not Included)
 In Parallel Connection 1-5 pcs
 Special Feature Honeycomb Striated Included
 Color Stainless Steel / **Code E508**

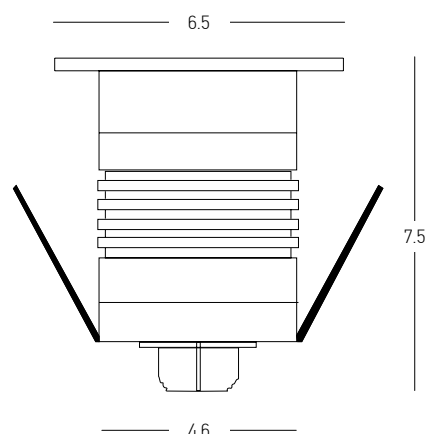


Power 3W
 Input 24V
 Color Temperature 2700K
 Lumen 218Lm
 Cri 80
 IP 65
 IK 08
 Dimensions Ø: 6.5cm H: 7.5cm
 Beam Angle 10x60°
 Material Aluminium - Stainless Steel - Tempered Glass
 Depth Required 11: 8cm
 Recessed Mounting Box Aluminium (Included)
 Recommended Driver LPH-18-24 (Not Included)
 In Parallel Connection 1-5 pcs
 Special Feature Honeycomb Striated Included
 Color Stainless Steel / **Code E509**




Driver
 Power 18W
 Input 220-240V, 50/60Hz
 Output 24V
 Dimensions L: 14cm W: 3cm H: 2.2cm
 IP 67

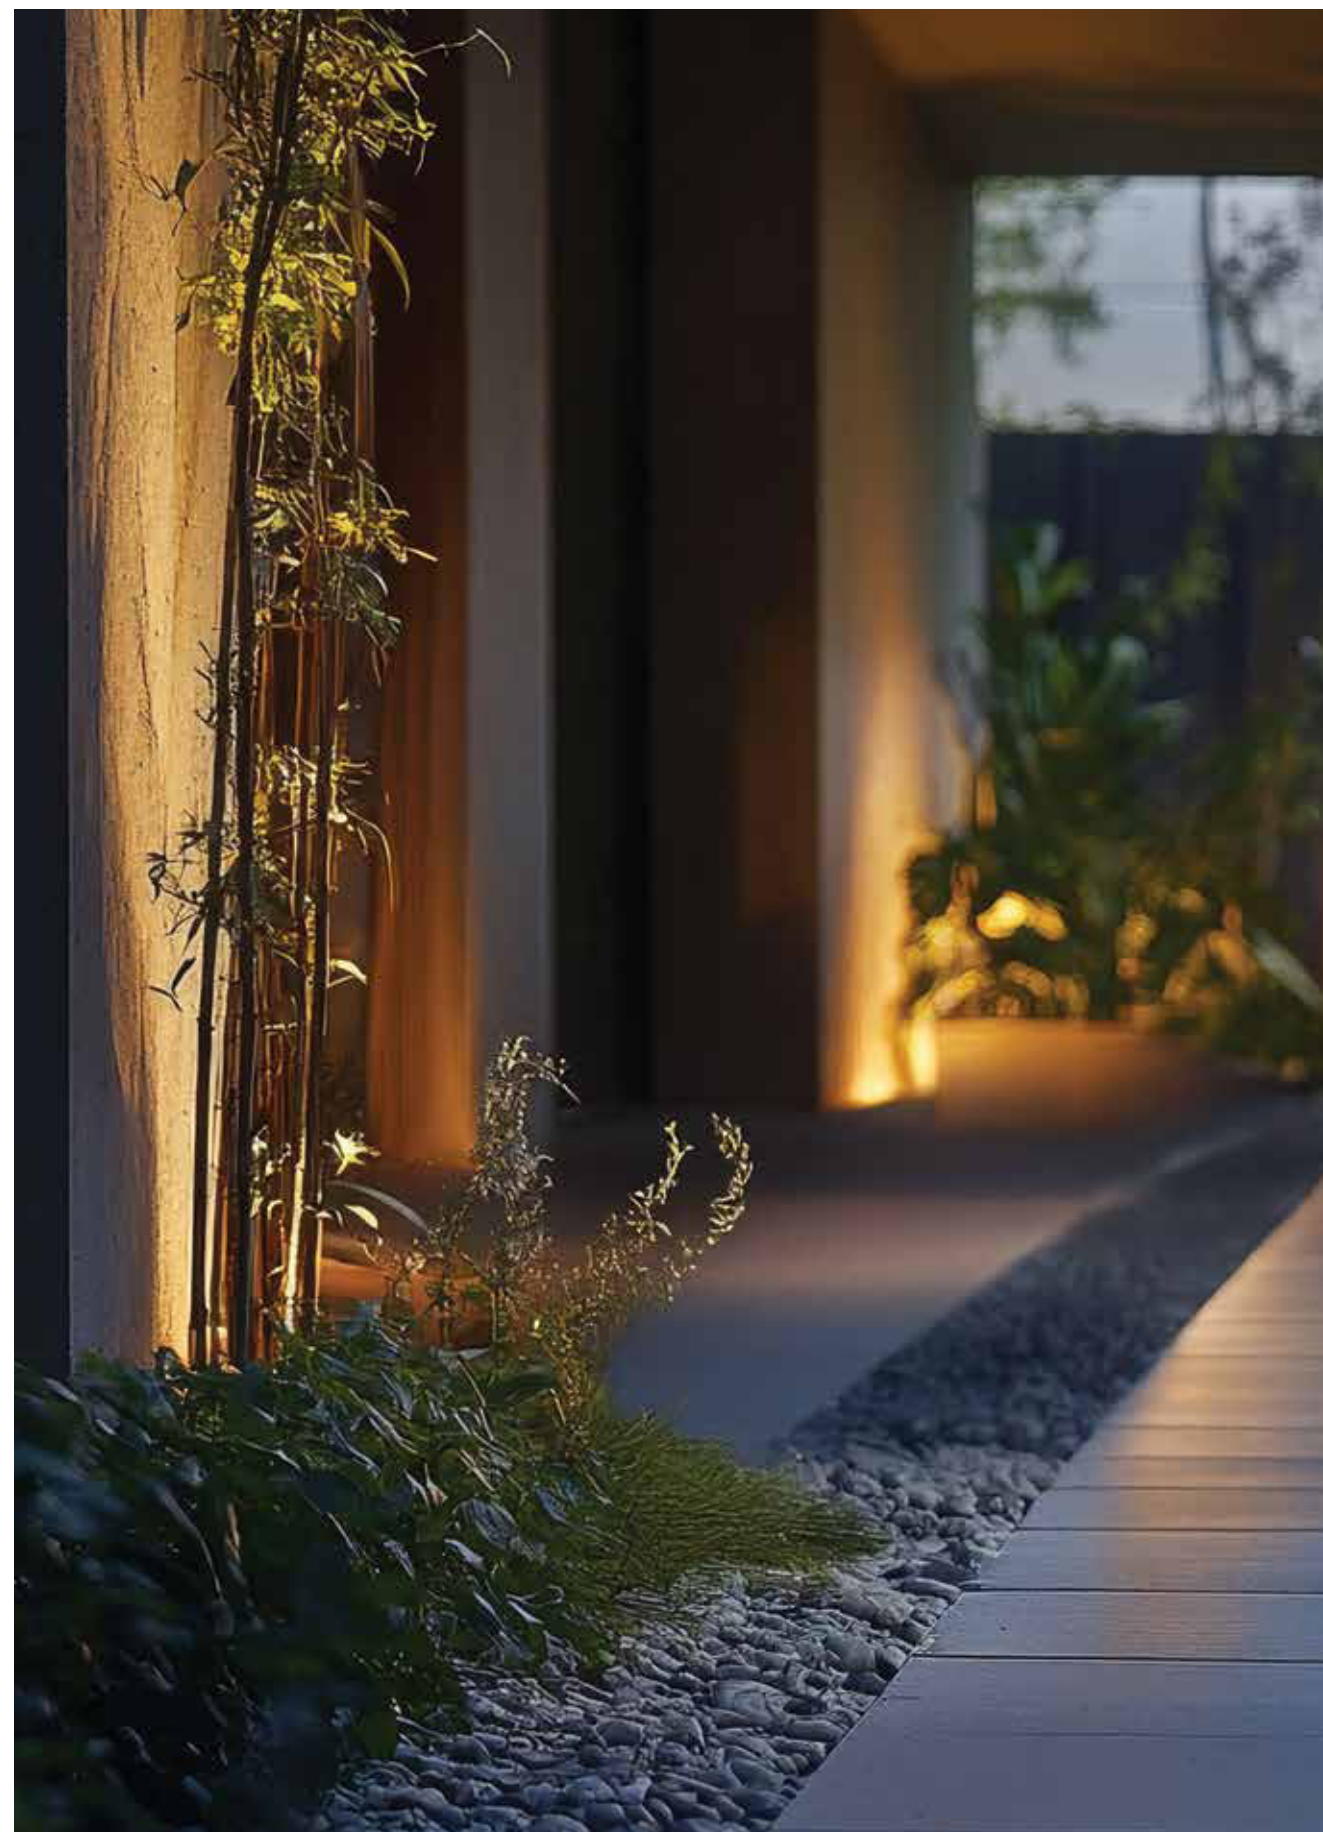




Power 3W
 Input 24V
 Color Temperature 3000K
 Lumen 150Lm
 Cri 80
 IP 65
 IK 10
 Dimensions Ø: 4.8cm H: 10cm
 Material Aluminium - Stainless Steel - PC Diffuser
 Depth Required 111: 13cm
 Recessed Mounting Box Included
 Recommended Driver LPH-18-24 (Not Included)
 In Parallel Connection 1-5 pcs

Color Aluminium / **Code E180**



Power 3W
 Input 24V
 Color Temperature 3000K
 Lumen 95Lm
 Cri 80
 IP 65
 IK 10
 Dimensions Ø: 4.8cm H: 10cm
 Material Aluminium - Stainless Steel - PC Diffuser
 Depth Required 111: 13cm
 Recessed Mounting Box Included
 Recommended Driver LPH-18-24 (Not Included)
 In Parallel Connection 1-5 pcs



Color Aluminium / **Code E179**



Power 3W
 Input 24V
 Color Temperature 3000K
 Lumen 232Lm
 Cri 80
 IP 65
 IK 8
 Dimensions Ø: 4.5cm H: 9.3cm
 Material Aluminium - Stainless Steel - PC Diffuser
 Depth Required 111: 12cm
 Recessed Mounting Box Included
 Recommended Driver LPH-18-24 (Not Included)
 In Parallel Connection 1-5 pcs



Color Aluminium / **Code E178**



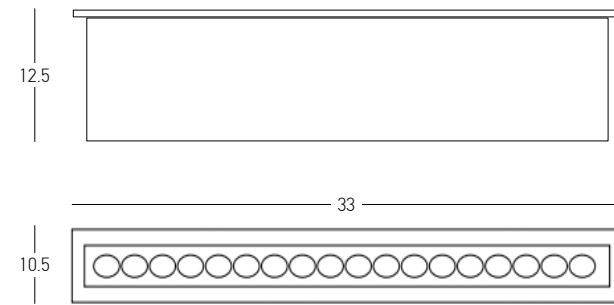



Power	9W
Input	220-240V, 50/60Hz
Color Temperature	3000K
Lumen	720Lm
Cri	80
IP	67
IK	10
Dimensions	L: 33cm W: 10.5cm H: 12.5cm
Beam Angle	45°
Material	Aluminium - Stainless Steel - Tempered Glass
Depth Required	11j: 14.5cm
Recessed Mounting Box	Included
Special Feature	Light Angle can be adjusted externally through screw on the frame. 50cm Cable Available Driver Included
Color	Stainless Steel / Code E365



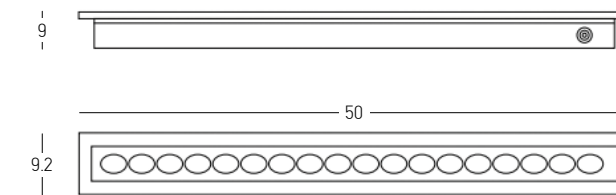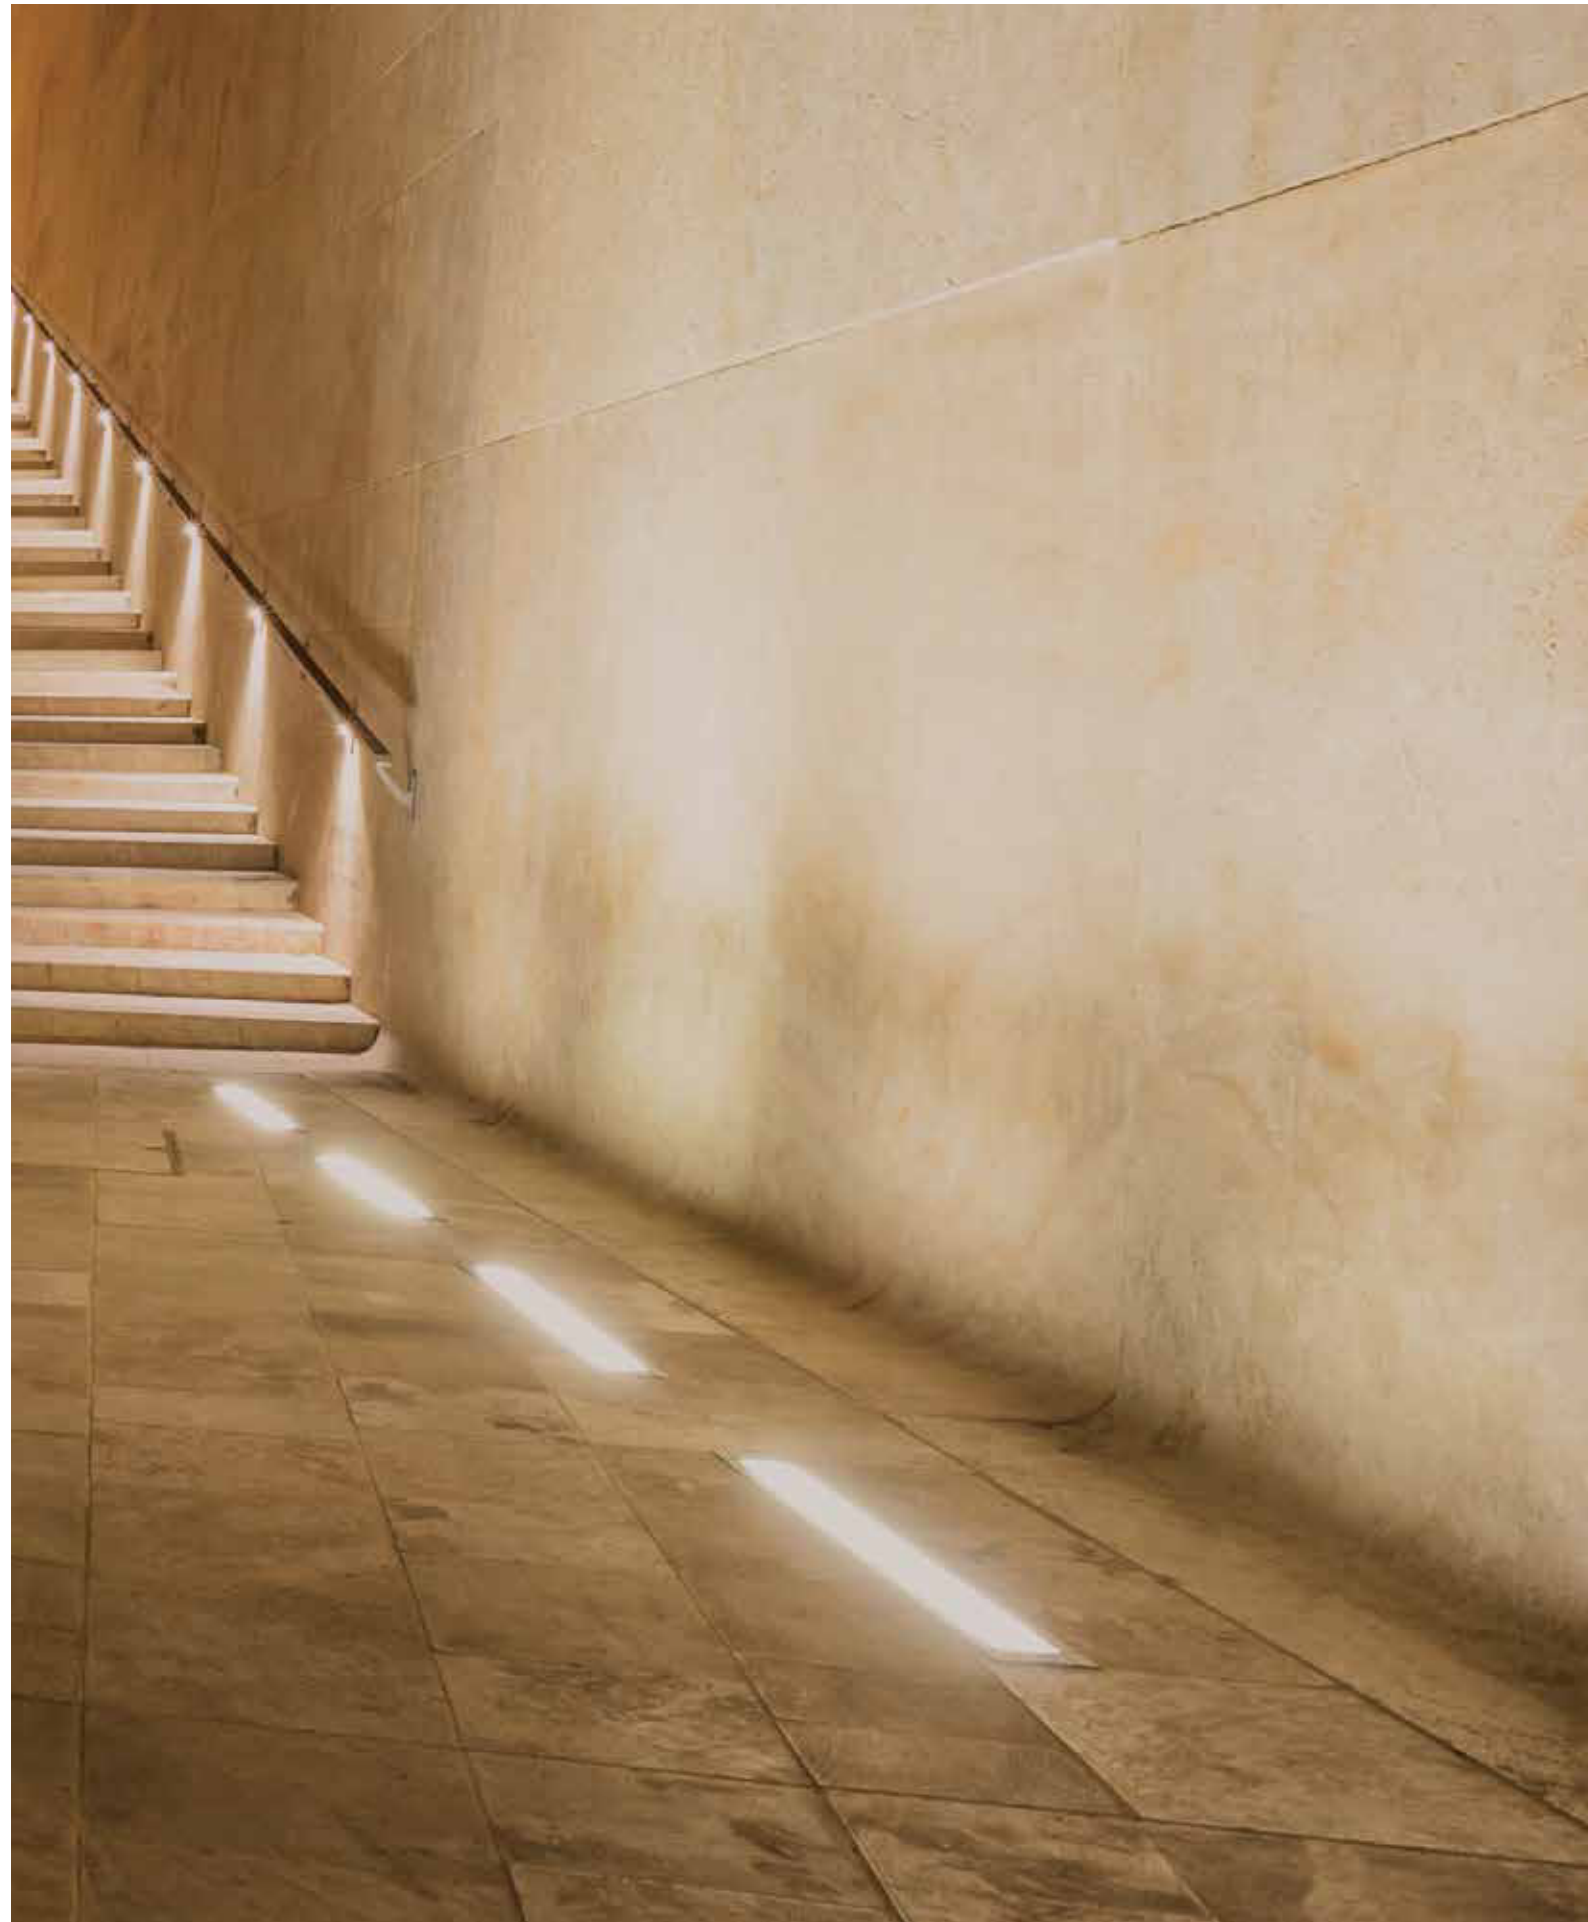


Power	9W
Input	220-240V, 50/60Hz
Color Temperature	3000K
Lumen	720Lm
Cri	80
IP	67
IK	10
Dimensions	L: 50cm W: 9.2cm H: 9cm
Beam Angle	45°
Material	Aluminium - Stainless Steel - Tempered Glass
Depth Required	11 cm
Recessed Mounting Box	Included
Special Feature	50cm Cable Available Driver Included
Color	Stainless Steel / Code E366



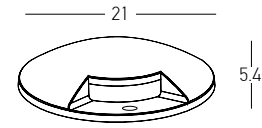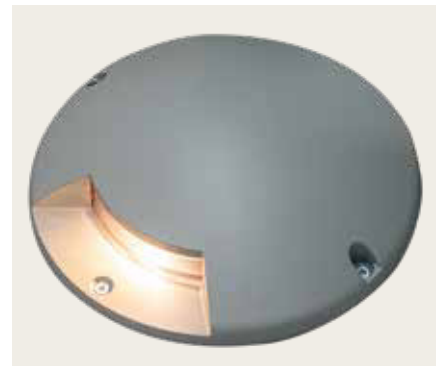



Power 3W
 Input 220-240V, 50/60Hz
 Color Temperature 3000K
 Lumen 130Lm
 Cri 80
 IP 67
 IK 10
 Dimensions Ø: 21cm H: 5.4cm
 Material Aluminium - Clear PC Diffuser
 Special Feature Surface Ground
 Driver Included

Color Grey / **Code E461**

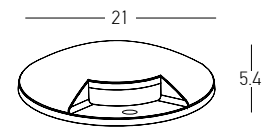

Power 5W
 Input 220-240V, 50/60Hz
 Color Temperature 3000K
 Lumen 228Lm
 Cri 80
 IP 67
 IK 10
 Dimensions Ø: 21cm H: 5.4cm
 Material Aluminium - Clear PC Diffuser
 Special Feature Surface Ground
 Driver Included


Color Grey / **Code E462**

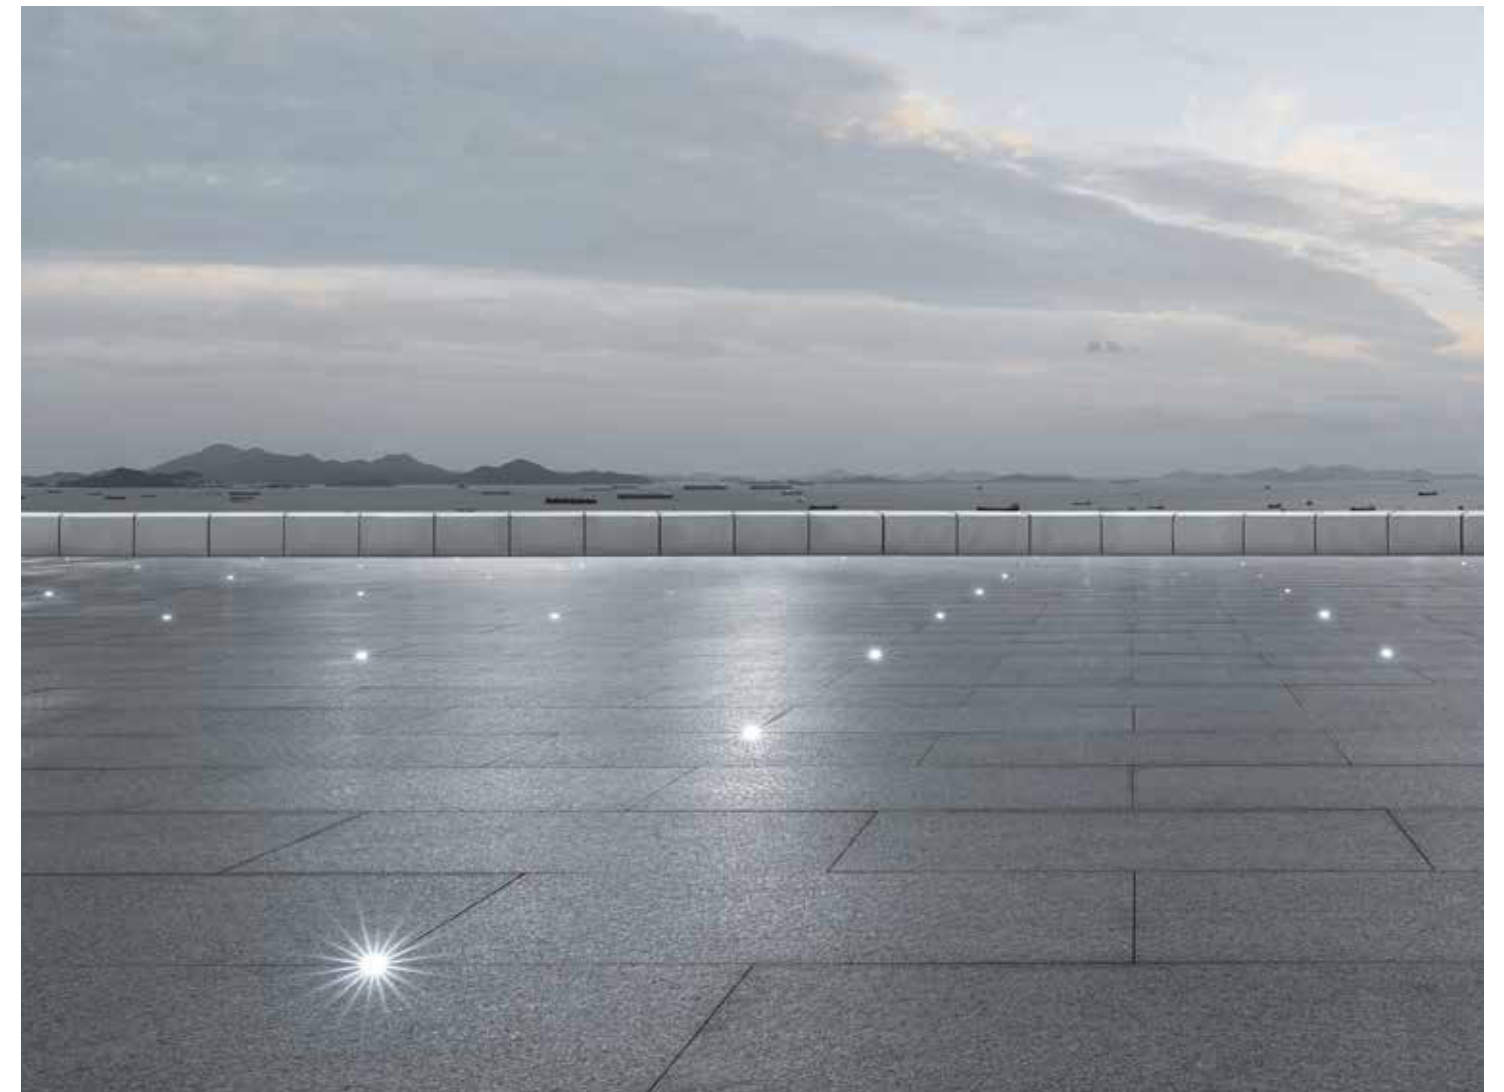

Power 0.2W
 Input 24V
 Color Temperature 3000K
 Lumen 23Lm
 Cri 80
 IP 68
 IK 10
 Dimensions Ø: 1.5cm H: 3.5cm
 Beam Angle 45°
 Material Stainless Steel - Tempered Glass
 Depth Required 11: 5cm
 Special Feature 50cm Cable Available
 Recommended Driver LPH-18-24 (Not Included)
 In Parallel Connection 1-10 pcs


Color Stainless Steel / **Code E364**



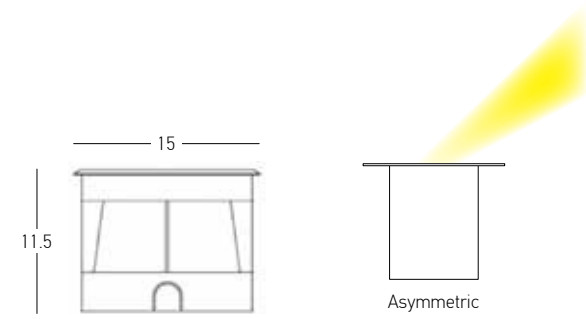


Power 7W
 Input 220-240V, 50/60Hz
 Color Temperature 3000K
 Lumen 560Lm
 Cri 80
 IP 66
 IK 8
 Dimensions Ø: 15cm H: 11.5cm
 Beam Angle 45°
 Material Aluminium - Stainless Steel - Glass
 Depth Required 11.5cm
 Recessed Mounting Box Included
 Special Feature Asymmetric
 50cm Cable Available
 Driver Included



Color Stainless Steel / **Code E363**

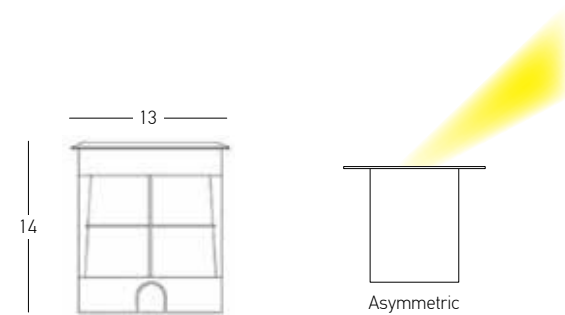

Power 7W
 Input 220-240V, 50/60Hz
 Color Temperature 3000K
 Lumen 560Lm
 Cri 80
 IP 66
 IK 8
 Dimensions Ø: 13cm H: 14cm
 Beam Angle 45°
 Material Aluminium - Stainless Steel - Glass
 Depth Required 14cm
 Recessed Mounting Box Included
 Special Feature Asymmetric
 50cm Cable Available
 Driver Included



Color Stainless Steel / **Code E362**

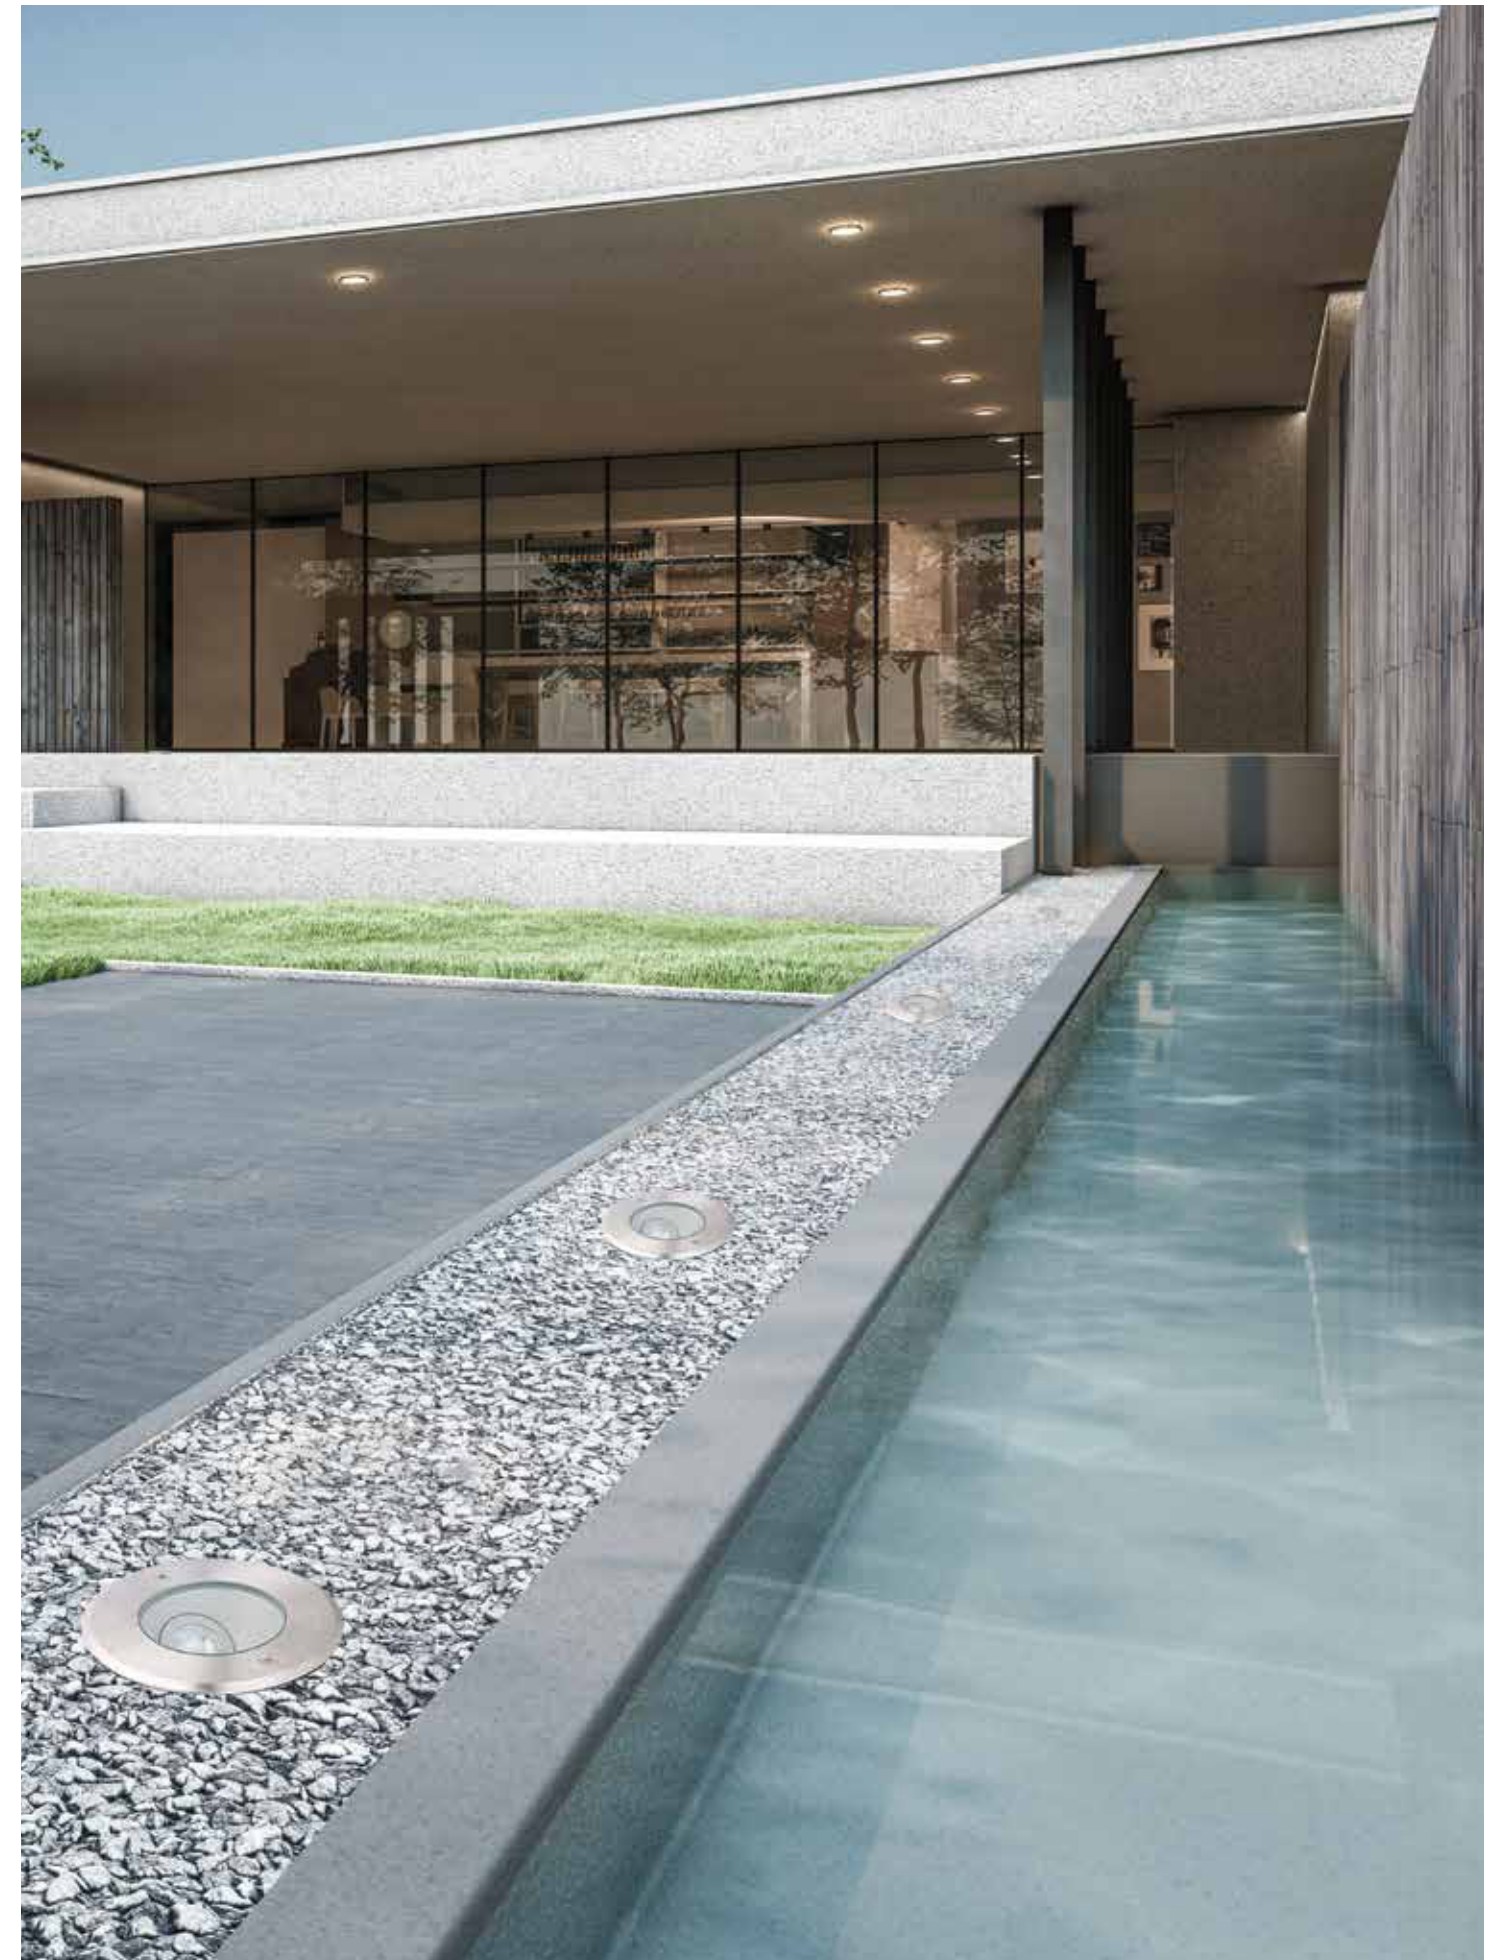

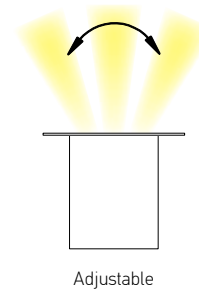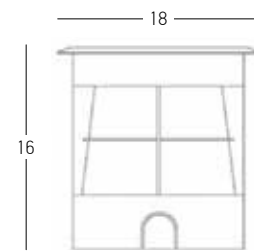


Power 15W
 Input 220-240V, 50/60Hz
 Color Temperature 3000K
 Lumen 1200Lm
 Cri 80
 IP 66
 IK 8
 Dimensions Ø: 18cm H: 16cm
 Beam Angle 45°
 Material Aluminium - Stainless Steel - Glass
 Depth Required 17cm
 Recessed Mounting Box Included
 Special Feature Light Angle can be adjusted externally through screw on the frame.
 50cm Cable Available
 Driver Included


Color Stainless Steel / **Code E361**

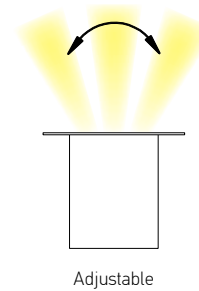


Power 7W
 Input 220-240V, 50/60Hz
 Color Temperature 3000K
 Lumen 560Lm
 Cri 80
 IP 66
 IK 8
 Dimensions Ø: 13cm H: 14cm
 Beam Angle 45°
 Material Aluminium - Stainless Steel - Glass
 Depth Required 15cm
 Recessed Mounting Box Included
 Special Feature Internal Adjustable Light Angle
 50cm Cable Available
 Driver Included

Color Stainless Steel / **Code E360**

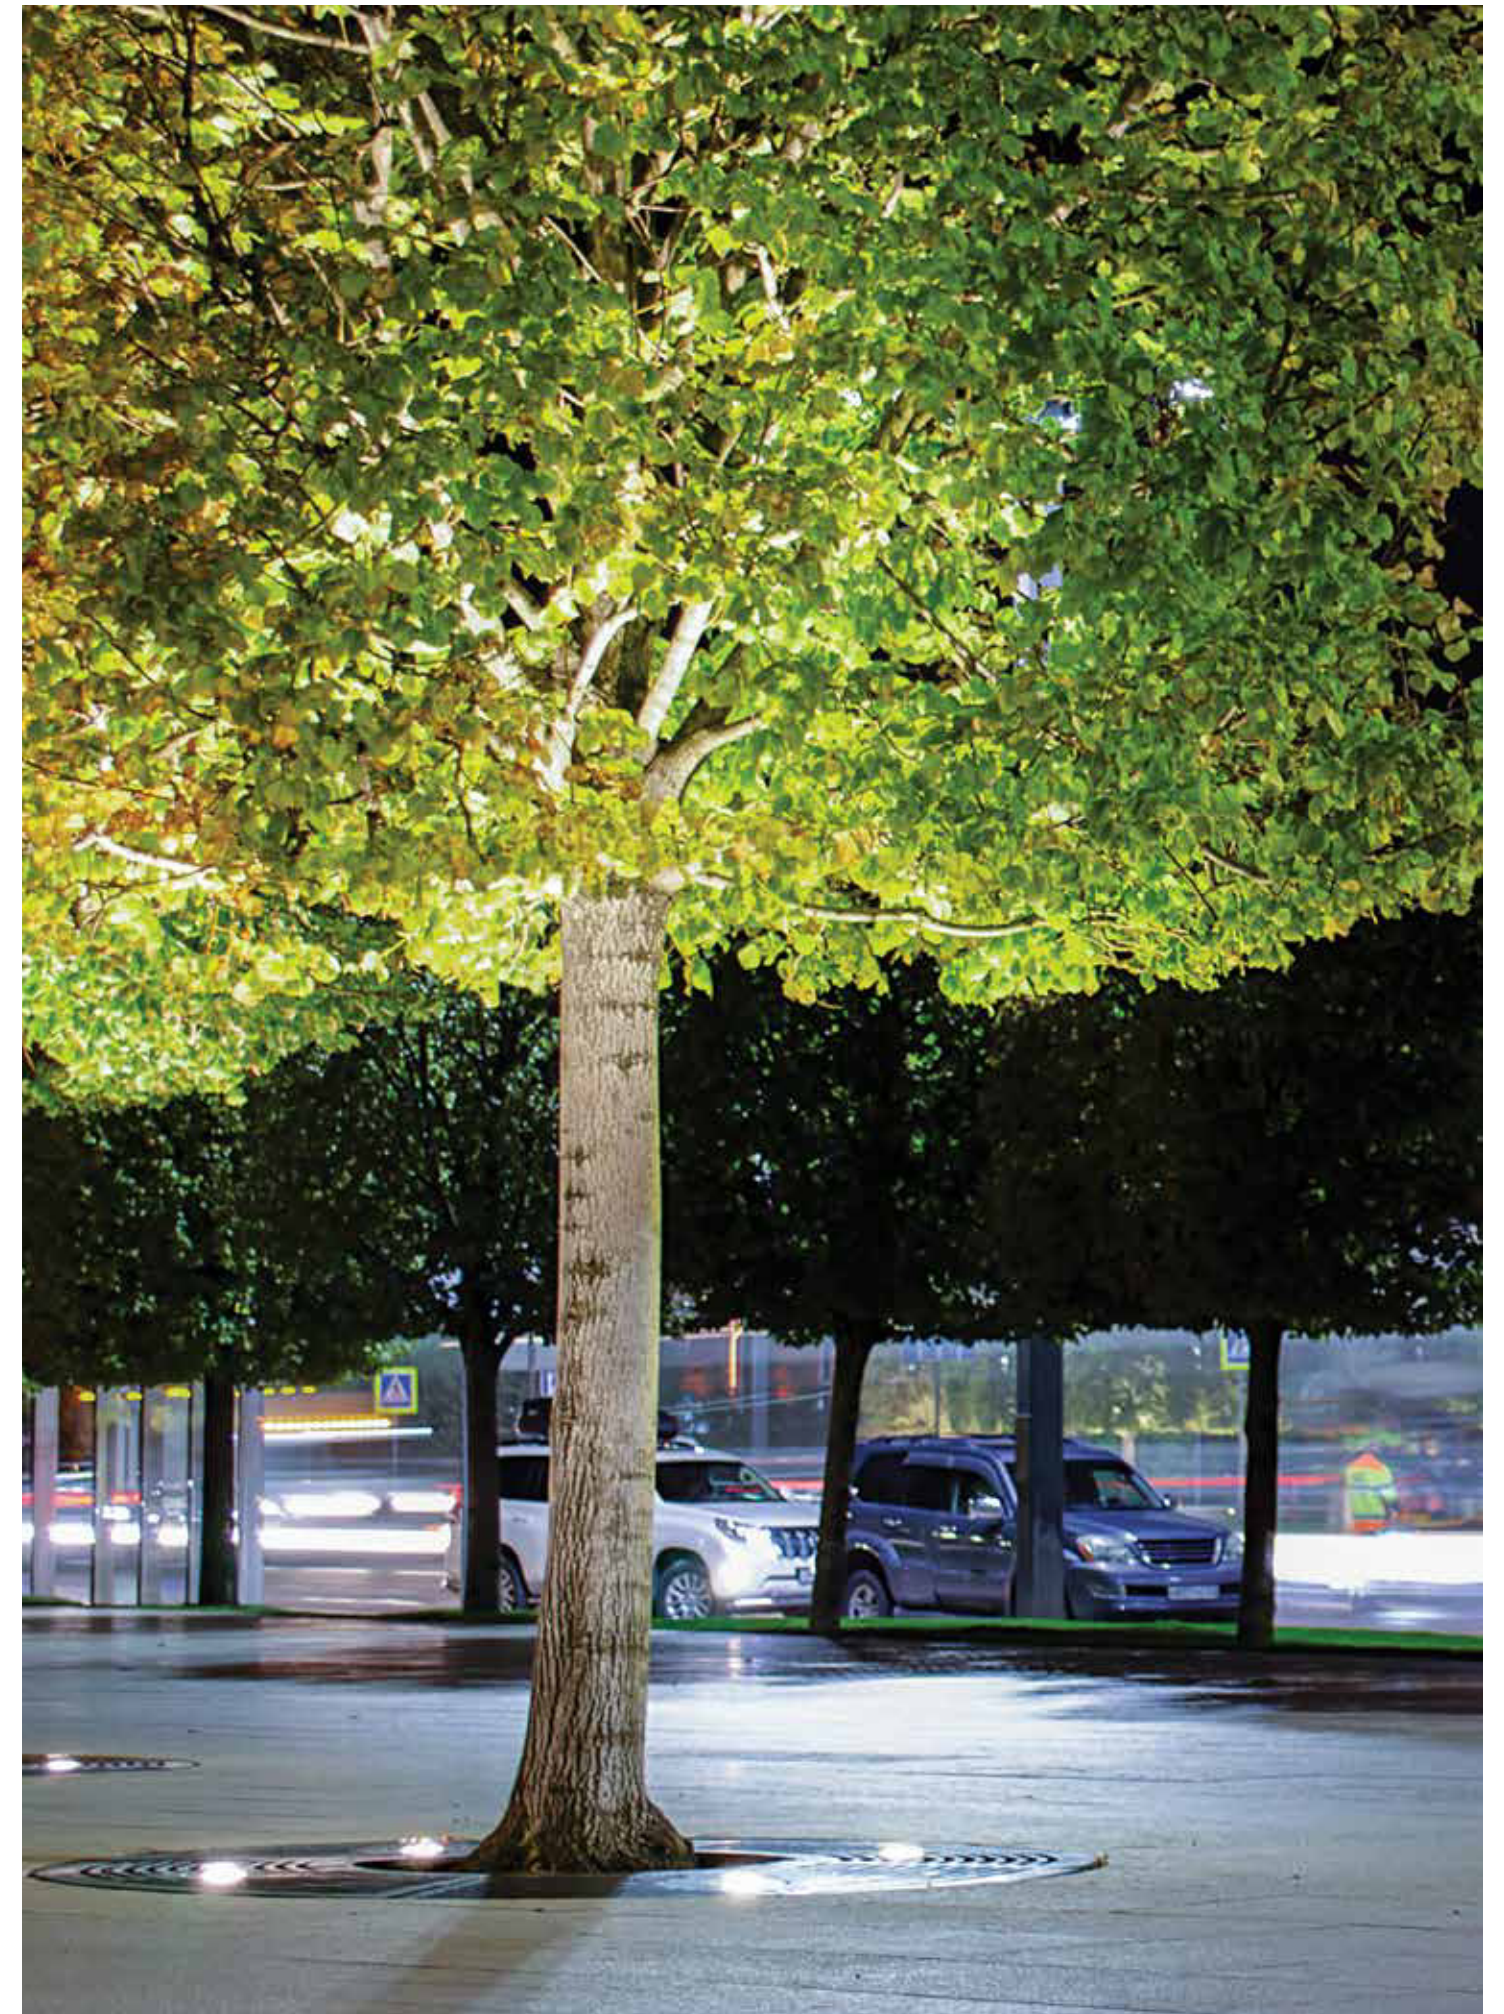



Bulb	1x GU10 LED
Power	10W MAX
Input	220-240V, 50/60Hz
IP	65
IK	8
Dimensions	Ø: 10cm H: 10cm
Material	Stainless Steel - Tempered Glass
Depth Required	11cm
Recessed Mounting Box	Included
Special Feature	50cm Cable Available GU10 Lampholder Included
Color	Stainless Steel / Code E359






Power	6W
Input	220-240V, 50/60Hz
Color Temperature	3000K
Lumen	618Lm
Cri	80
IP	67
IK	8
Dimensions	Ø: 10cm H: 9.5cm
Beam Angle	36°
Material	Stainless Steel - Tempered Glass
Depth Required	12cm
Recessed Mounting Box	Included
Special Feature	Driver Included
Color	Stainless Steel / Code E189




Power. Precision. Presence.
Wall washers for uniform illumination and
architectural impact.



09. WALL WASHER

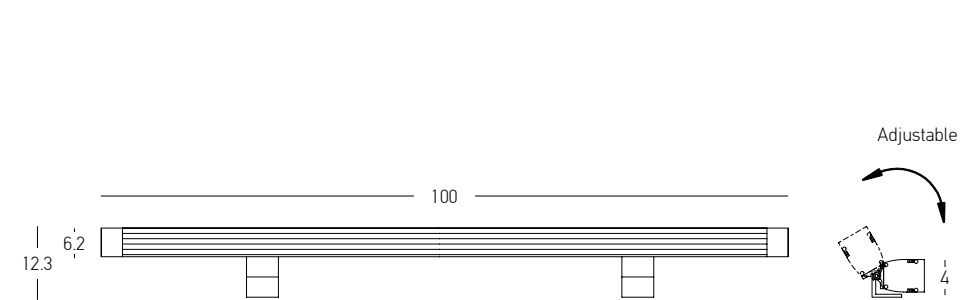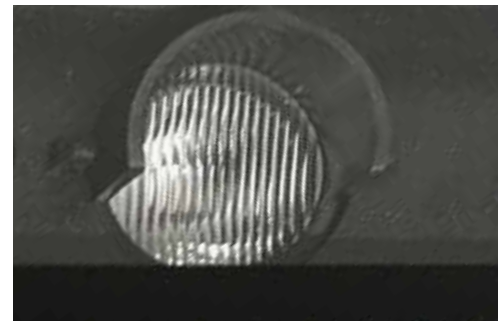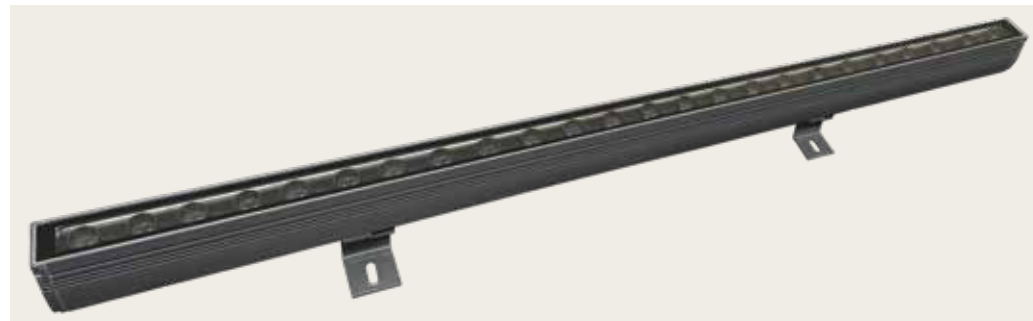


Power 36W
 Input 220-240V, 50/60Hz
 Color Temperature 3000K
 Lumen 2200Lm
 Cri 80
 IP 65
 Dimensions L: 100cm W: 4cm H: 12.3cm
 Beam Angle 60° x 10°
 Material Aluminium - Glass
 Special Feature Half Circular Anti-Glare
 Driver Included
 Connect 8pcs MAX
 Color Graphite / **Code E496**

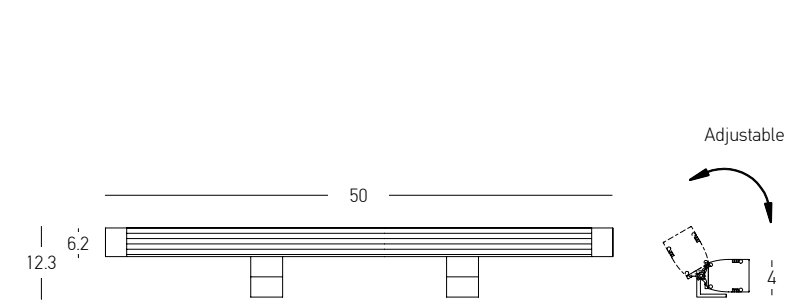


Power 18W
 Input 220-240V, 50/60Hz
 Color Temperature 3000K
 Lumen 1160Lm
 Cri 80
 IP 65
 Dimensions L: 50cm W: 4cm H: 12.3cm
 Beam Angle 60° x 10°
 Material Aluminium - Glass
 Special Feature Half Circular Anti-Glare
 Driver Included
 Connect 8pcs MAX
 Color Graphite / **Code E497**




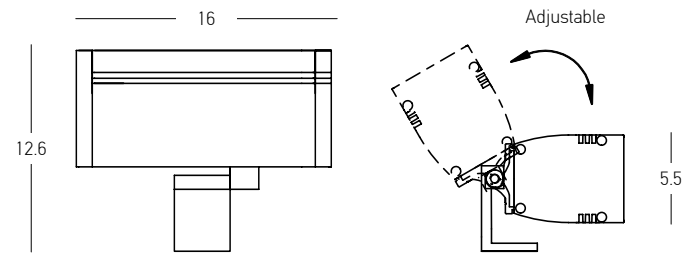


Power 9W
 Input 220-240V, 50/60Hz
 Color Temperature 3000K
 Lumen 420Lm
 Cri 80
 IP 65
 Dimensions L: 16cm W: 5.5cm H: 12.6cm
 Beam Angle 15°
 Material Aluminium - Glass
 Special Feature Honeycomb Included
 Driver Included
 120° Adjustable Angle
 Connect 8pcs MAX
 Color Graphite / **Code E495**



Connectors Male & Female for E495, E496 & E497
 Cable 25cm
 Input 220-240V
 IP 66
 Color Black / **Code CNCTR 6**



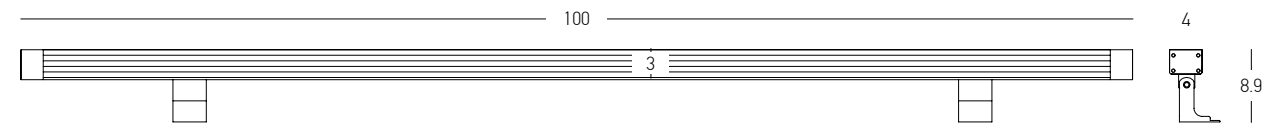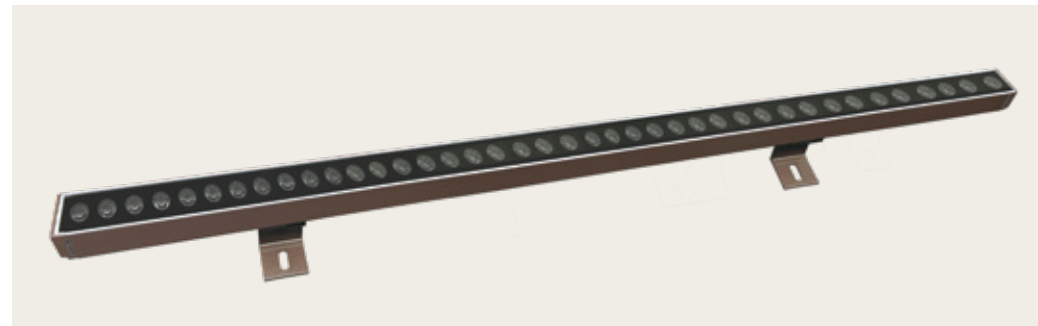

Power 36W
 Input 24V
 Color Temperature 2700K
 Lumen 1530Lm
 Cri 80
 IP 65
 Dimensions L: 100cm W: 4cm H: 8.9cm
 Beam Angle 60° x 10°
 Material Aluminium - Glass
 Special Feature Anti-Glare
 Driver Not Included
 Connect 5pcs MAX

Color Dark Brown / **Code E498**





Power 18W
 Input 24V
 Color Temperature 2700K
 Lumen 775Lm
 Cri 80
 IP 65
 Dimensions L: 50cm W: 4cm H: 8.9cm
 Beam Angle 60° x 10°
 Material Aluminium - Glass
 Special Feature Anti-Glare
 Driver Not Included
 Connect 5pcs MAX

Color Dark Brown / **Code E499**



Dimming Options

1. DALI Dimming : Dali Driver 24V Channel 1+Switch Dali MCU (Page 396-397)
2. 1-10 Dimming : 1-10V Driver 24V (Page 396-397)
3. PUSH BUTTON Dimming : Dali Driver 24V Channel 1(Page 396-397)
4. ON-OFF Dimming : ON-OFF Driver 24V (Page 396-397)


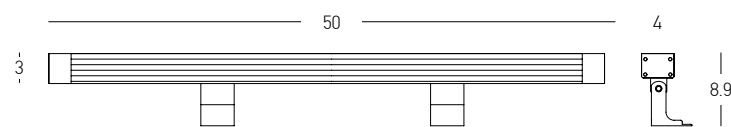


Connectors Male & Female for E498 & E499

Cable 25cm
 Input 24V
 IP 66
 Color Black / **Code CNCTR 7**



WALL WASHER TUNABLE WHITE

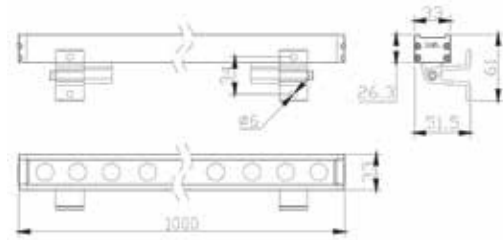


Power 24W
 Input 24V
 Color Temperature 2700K-6500K
 Lumen 1580-1770Lm
 Cri 80
 IP 66
 Dimensions L: 100cm W: 3.3cm H: 2.6cm
 Beam Angle 60° x 10°
 Material Aluminium
 Special Feature Honeycomb Included
 Driver Not Included
 Connect 6pcs MAX
 Color Grey / **Code E382**



Dimming Options


1. DALI Dimming : OTi DALI Driver 4CH (Page 396-397)
2. BLUETOOTH Dimming : On-Off Driver 24V + OT Wi DIM 5CH CA (CASAMBI App) (Page 396-397)





Connectors Male & Female for E382

Cable 25cm
 Input 24V
 IP 66
 Color Black / **Code CNCTR 3**




Power 288W @ 24V
 Input 220-240V, 50/60Hz
 Dimensions W: 2.9cm H: 2.2cm L: 18.6cm
 Bluetooth Dimming 
 OT Wi DIM 5CH CA , RGB, RGBW and RGBTW
 Material Plastic
 Special Feature IP 20
 Color White / **Code 6937186115232**

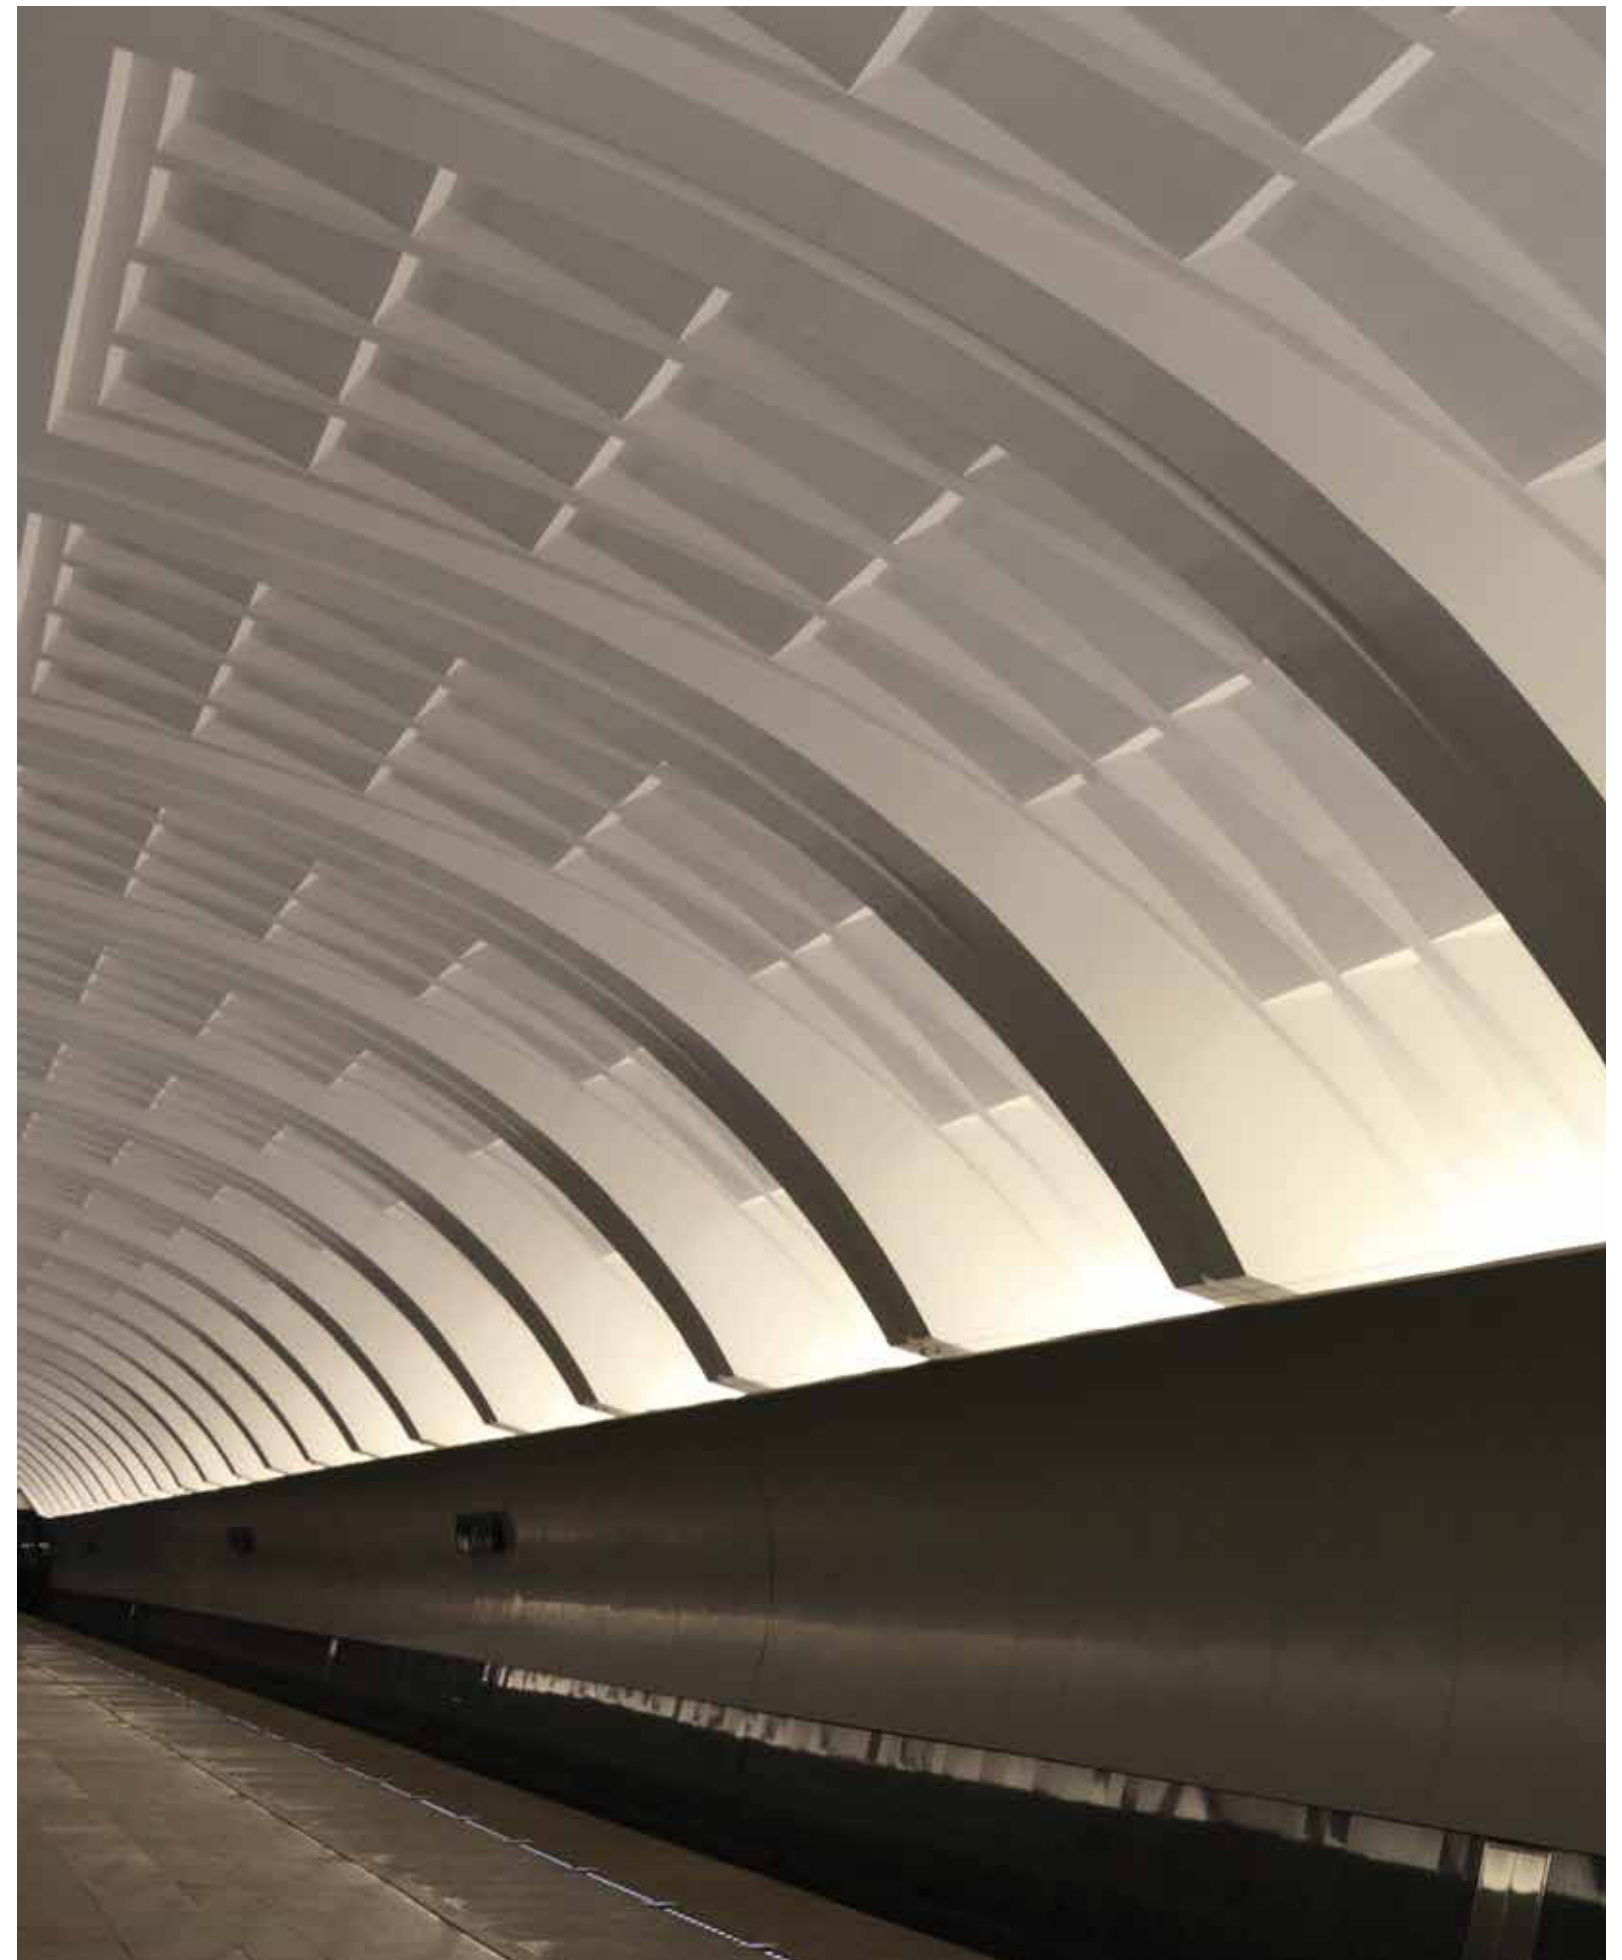



WALL WASHERS RGB & RGBW

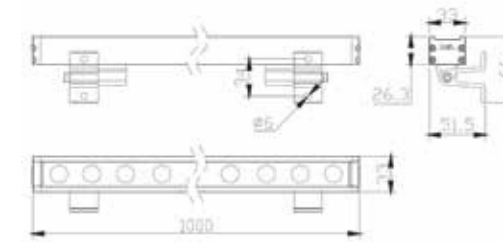


Code	Kelvin	Watt	Lumen
E380	RGB	12W	MAX 280
E381	RGBW 4000	12W	MAX 480

Power 12W
 Input 24V
 Cri 80
 IP 66
 Dimensions L: 100cm W: 3.3cm H: 2.6cm
 Beam Angle 60° x 10°
 Material Aluminium
 Special Feature Honeycomb Included
 Driver Not Included
 Connect 6pcs MAX
 Color Grey



- Dimming Options**
 1. DALI Dimming : OTi DALI Driver 4CH (Page 396-397)
 2. BLUETOOTH Dimming : On-Off Driver 24V + OT Wi DIM 5CH CA (CASAMBI App) (Page 396-397)

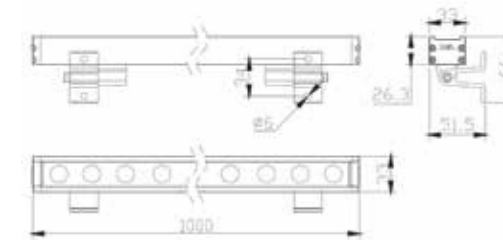

Code	Kelvin	Watt	Lumen
E378	RGB	24W	MAX 560
E379	RGBW 4000	24W	MAX 960

Power 24W
 Input 24V
 Cri 80
 IP 66
 Dimensions L: 100cm W: 3.3cm H: 2.6cm
 Beam Angle 60° x 10°
 Material Aluminium
 Special Feature Honeycomb Included
 Driver Not Included
 Connect 6pcs MAX
 Color Grey





- Dimming Options**
 1. DALI Dimming : OTi DALI Driver 4CH (Page 396-397)
 2. BLUETOOTH Dimming : On-Off Driver 24V + OT Wi DIM 5CH CA (CASAMBI App) (Page 396-397)



Connectors Male & Female for E381 & E379
 Cable 25cm
 Input 24V
 IP 66
 Color Black / Code CNCTR 2



Connectors Male & Female for E380 & E378
 Cable 25cm
 Input 24V
 IP 66
 Color Black / Code CNCTR 4

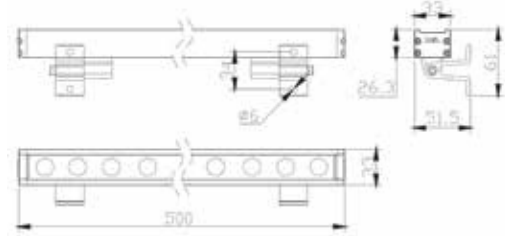

Power 12W
 Input 24V
 Cri 80
 IP 66
 Dimensions L: 50cm W: 3.3cm H: 2.6cm
 Beam Angle 60° x 10°
 Material Aluminium
 Special Feature Honeycomb Included
 Driver Not Included
 Connect 12pcs MAX


Color Grey



Dimming Options

1. DALI Dimming : Dali Driver 24V Channel 1 + Switch Dali MCU (Page 396-397)
2. 1-10 Dimming : 1-10V Driver 24V (Page 396-397)
3. PUSH BUTTON Dimming : Dali Driver 24V Channel 1 (Page 396-397)
4. ON-OFF Dimming : ON-OFF Driver 24V (Page 396-397)

Code	Kelvin	Watt	Lumen
E376	3000	12W	MAX 850
E377	4000	12W	MAX 870

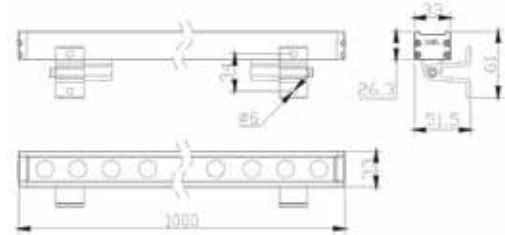

Power 24W
 Input 24V
 Cri 80
 IP 66
 Dimensions L: 100cm W: 3.3cm H: 2.6cm
 Beam Angle 60° x 10°
 Material Aluminium
 Special Feature Honeycomb Included
 Driver Not Included
 Connect 6pcs MAX

Color Grey



Dimming Options

1. DALI Dimming : Dali Driver 24V Channel 1 + Switch Dali MCU (Page 396-397)
2. 1-10 Dimming : 1-10V Driver 24V (Page 396-397)
3. PUSH BUTTON Dimming : Dali Driver 24V Channel 1 (Page 396-397)
4. ON-OFF Dimming : ON-OFF Driver 24V (Page 396-397)

Code	Kelvin	Watt	Lumen
E374	3000	24W	MAX 1700
E375	4000	24W	MAX 1720




Connectors Male & Female for E376, E377, E374 & E375


Cable 25cm
 Input 24V
 IP 66
 Color Black / Code CNCTR 1



Track The Light, Magnify The Possibilities.
IP-protected outdoor lighting for modern
spaces.

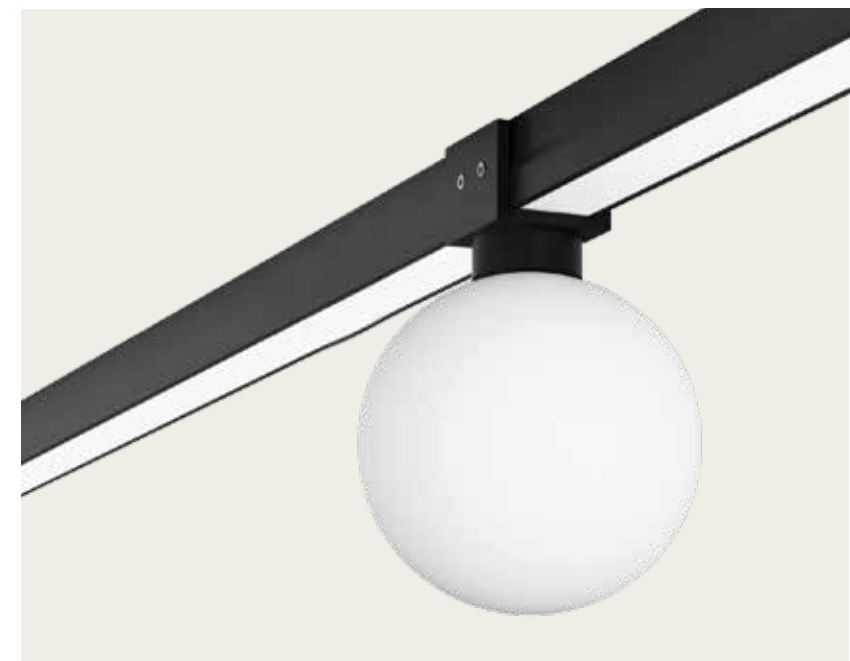

10. IP65 SURFACE LIGHTING SYSTEM

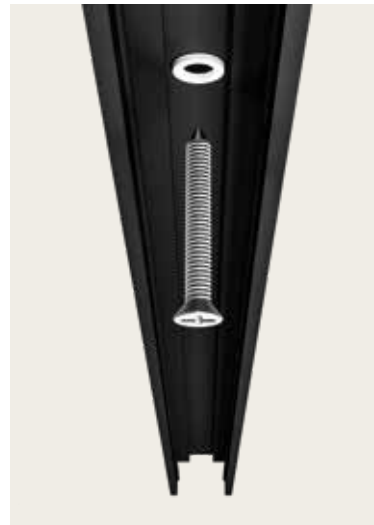


IP65 SURFACE OUTDOOR TRACK

Dimensions L: 300cm W: 2.6cm H: 2.5cm
 Material Aluminium
 Color Sandy Black / **Code E385**




STRAIGHT MECHANICAL CONNECTOR

Dimensions L: 10cm W: 3cm H: 2.6cm
 Material Aluminium
 Color Sandy Black / **Code E389**

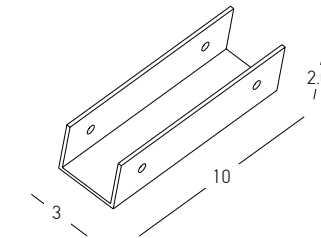


HORIZONTAL MECHANICAL CORNER

Dimensions L: 7cm W: 7cm H: 2.6cm
 Material Aluminium
 Color Sandy Black / **Code E390**

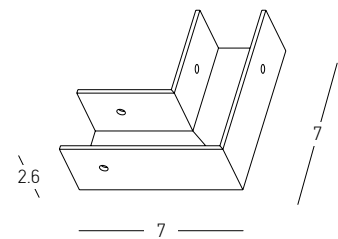


T MECHANICAL CONNECTOR

Dimensions L: 10cm W: 6.5cm H: 2.6cm
 Material Aluminium
 Color Sandy Black / **Code E393**

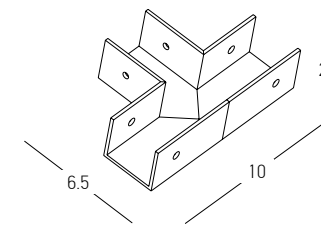


VERTICAL MECHANICAL CORNER

Dimensions L: 7cm W: 3cm H: 7cm
 Material Aluminium
 Color Sandy Black / **Code E392**





END CAP



Dimensions L: 6.2cm W: 3cm H: 2.6cm
 Material Aluminium
 Color Sandy Black / **Code E391**

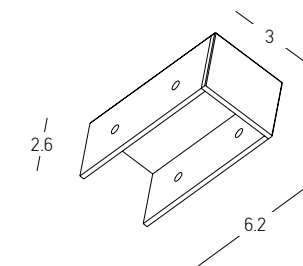


IP65 WATERPROOF RUBBER

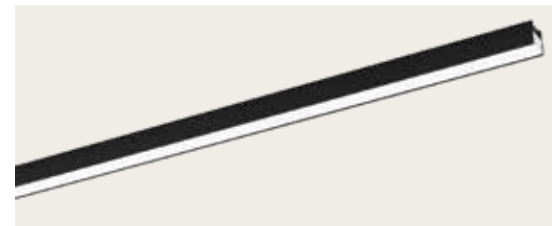




Power 10W
 Input 48V
 Color Temperature 3200K
 Lumen 700Lm
 Cri 90
 IP 65
 Beam Angle 100°
 Dimmable DALI
 Dimensions L: 100cm W: 2cm H: 1.4cm
 Material Silicone Rubber
 Special Feature 1m Can Load 144W MAX
 Color White / **Code E386**


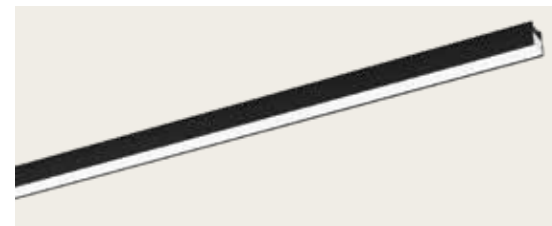


Power 20W
 Input 48V
 Color Temperature 3200K
 Lumen 1400Lm
 Cri 90
 IP 65
 Beam Angle 100°
 Dimmable DALI
 Dimensions L: 200cm W: 2cm H: 1.4cm
 Material Silicone Rubber
 Special Feature 2m Can Load 288W MAX
 Color White / **Code E387**




Power 30W
 Input 48V
 Color Temperature 3200K
 Lumen 2100Lm
 Cri 90
 IP 65
 Beam Angle 100°
 Dimmable DALI
 Dimensions L: 300cm W: 2cm H: 1.4cm
 Material Silicone Rubber
 Special Feature 3m Can Load 432W MAX
 Color White / **Code E388**

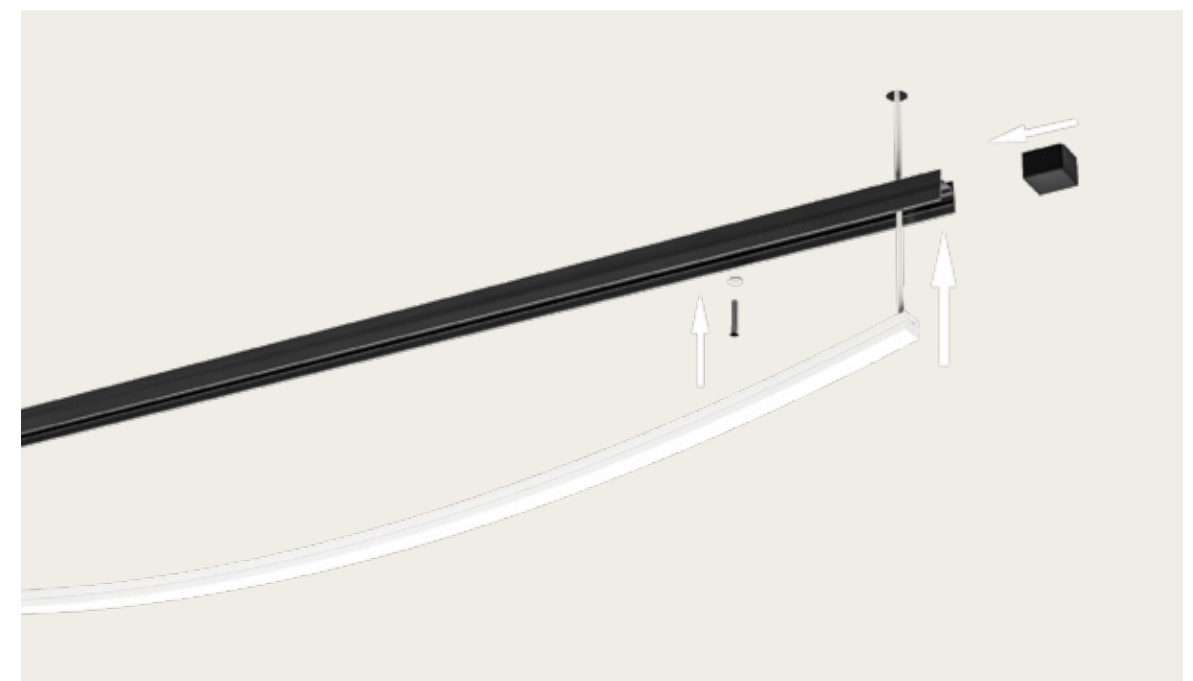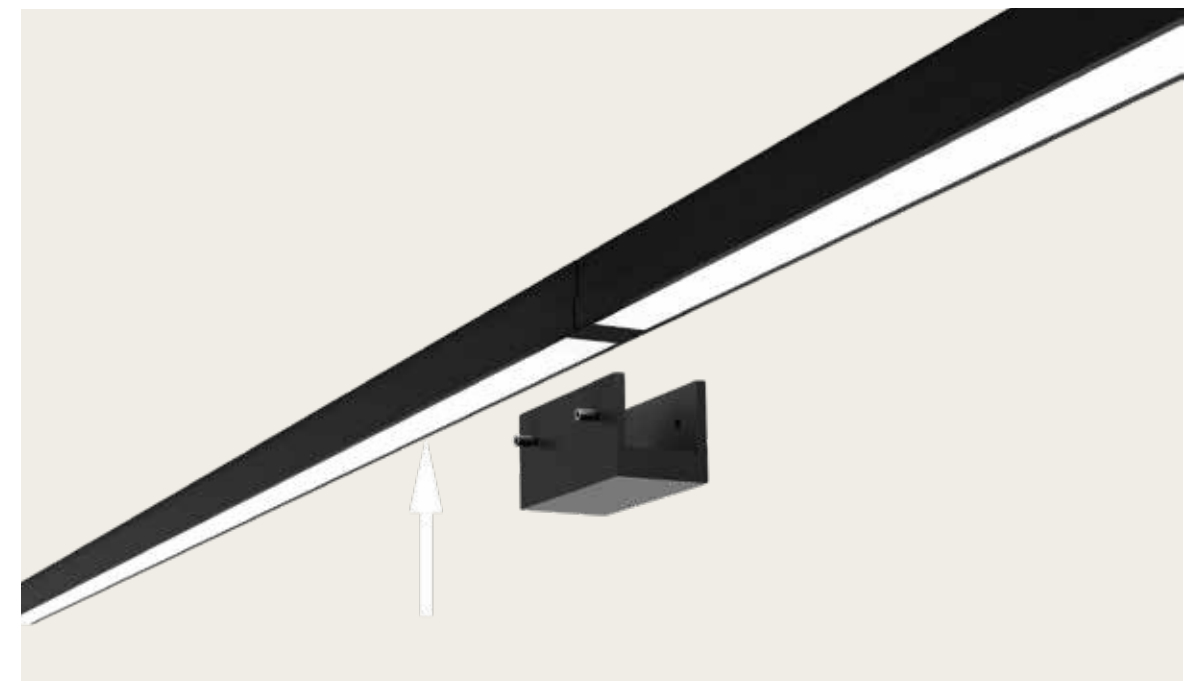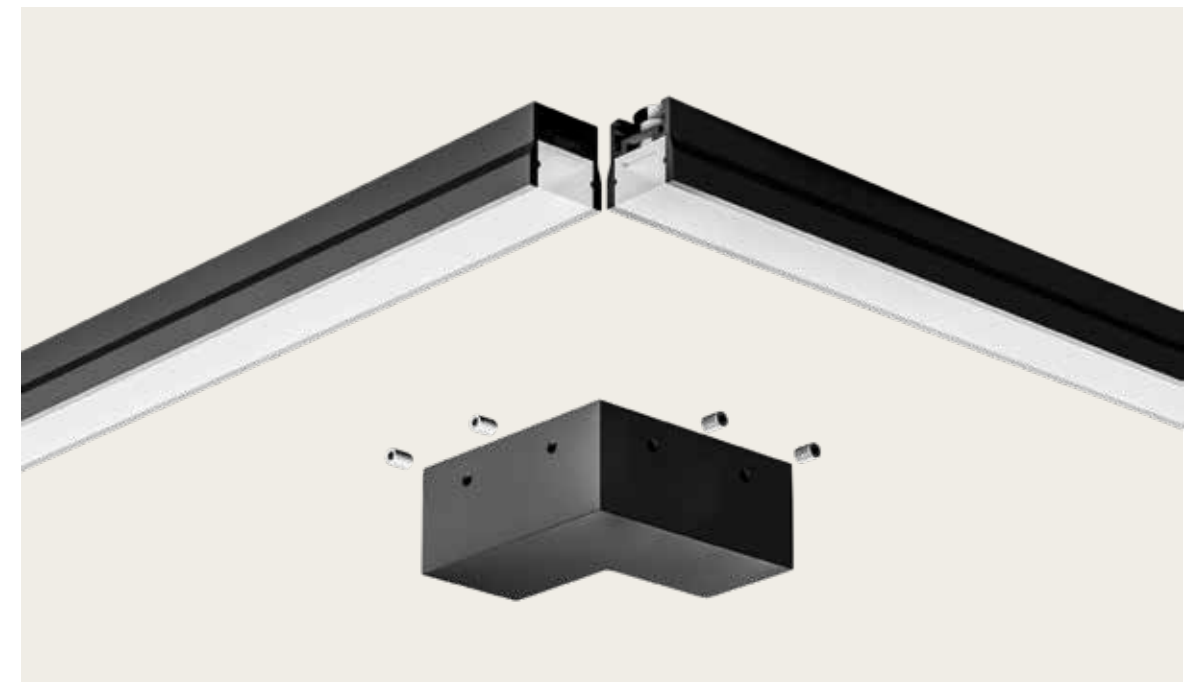

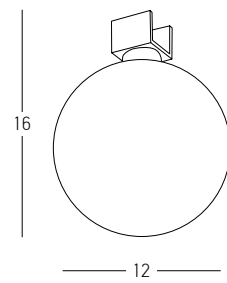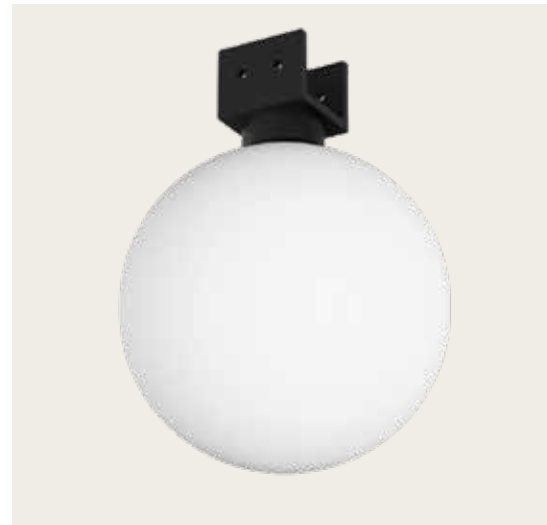


Power 9W
 Input 48V
 Color Temperature 3200K
 Lumen 438Lm
 Cri 80
 IP 65
 Dimmable DALI
 Dimensions Ø: 12cm H: 16cm
 Material Aluminium - Opal Diffuser
 Special Feature Does Not Operate Independently, Must Be Mounted On E386, E387 & E388
 Color Opal-Sandy Black Adaptor / **Code E501**

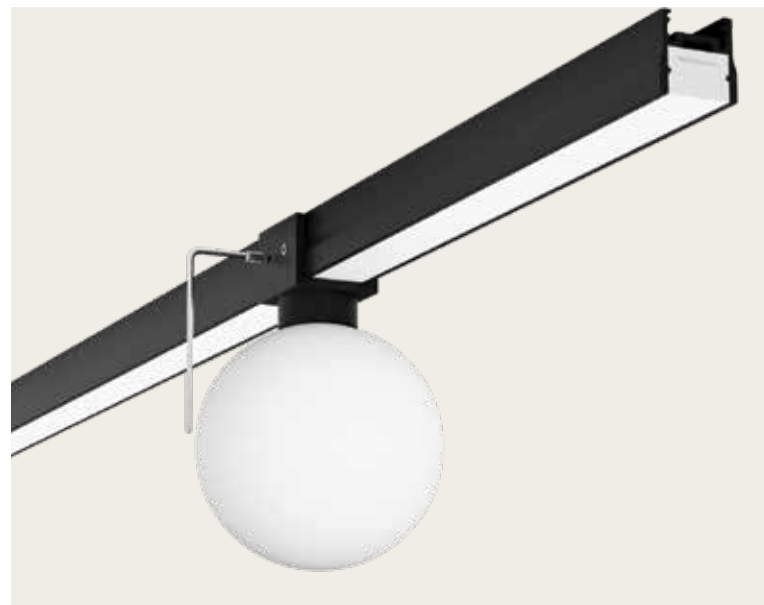

SURFACE MOUNT BOX FOR 48V IP65 LIGHTING SYSTEM





Dimensions L: 39cm W: 14cm H: 5.5cm
 Material Metal
 Special Feature Driver Not Included
 Color Black / **E397**

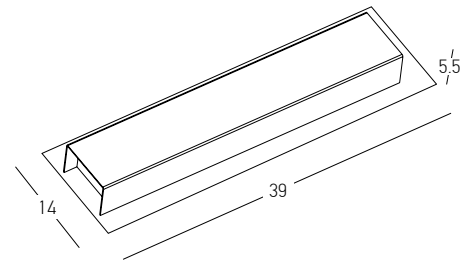

Power 160W
 Input 220-240V, 50/60Hz
 Output 48V
 IP 67
 Dimensions L: 33.5 W: 3cm H: 2.1cm
 Dimmable DALI
 Material Metal
 Special Feature Fits Into E397
Code XSV160W48



Power 240W
 Input 220-240V, 50/60Hz
 Output 48V
 IP 67
 Dimensions L: 38.5 W: 3cm H: 2.1cm
 Dimmable DALI
 Material Metal
 Special Feature External Application
Code XSV240W48

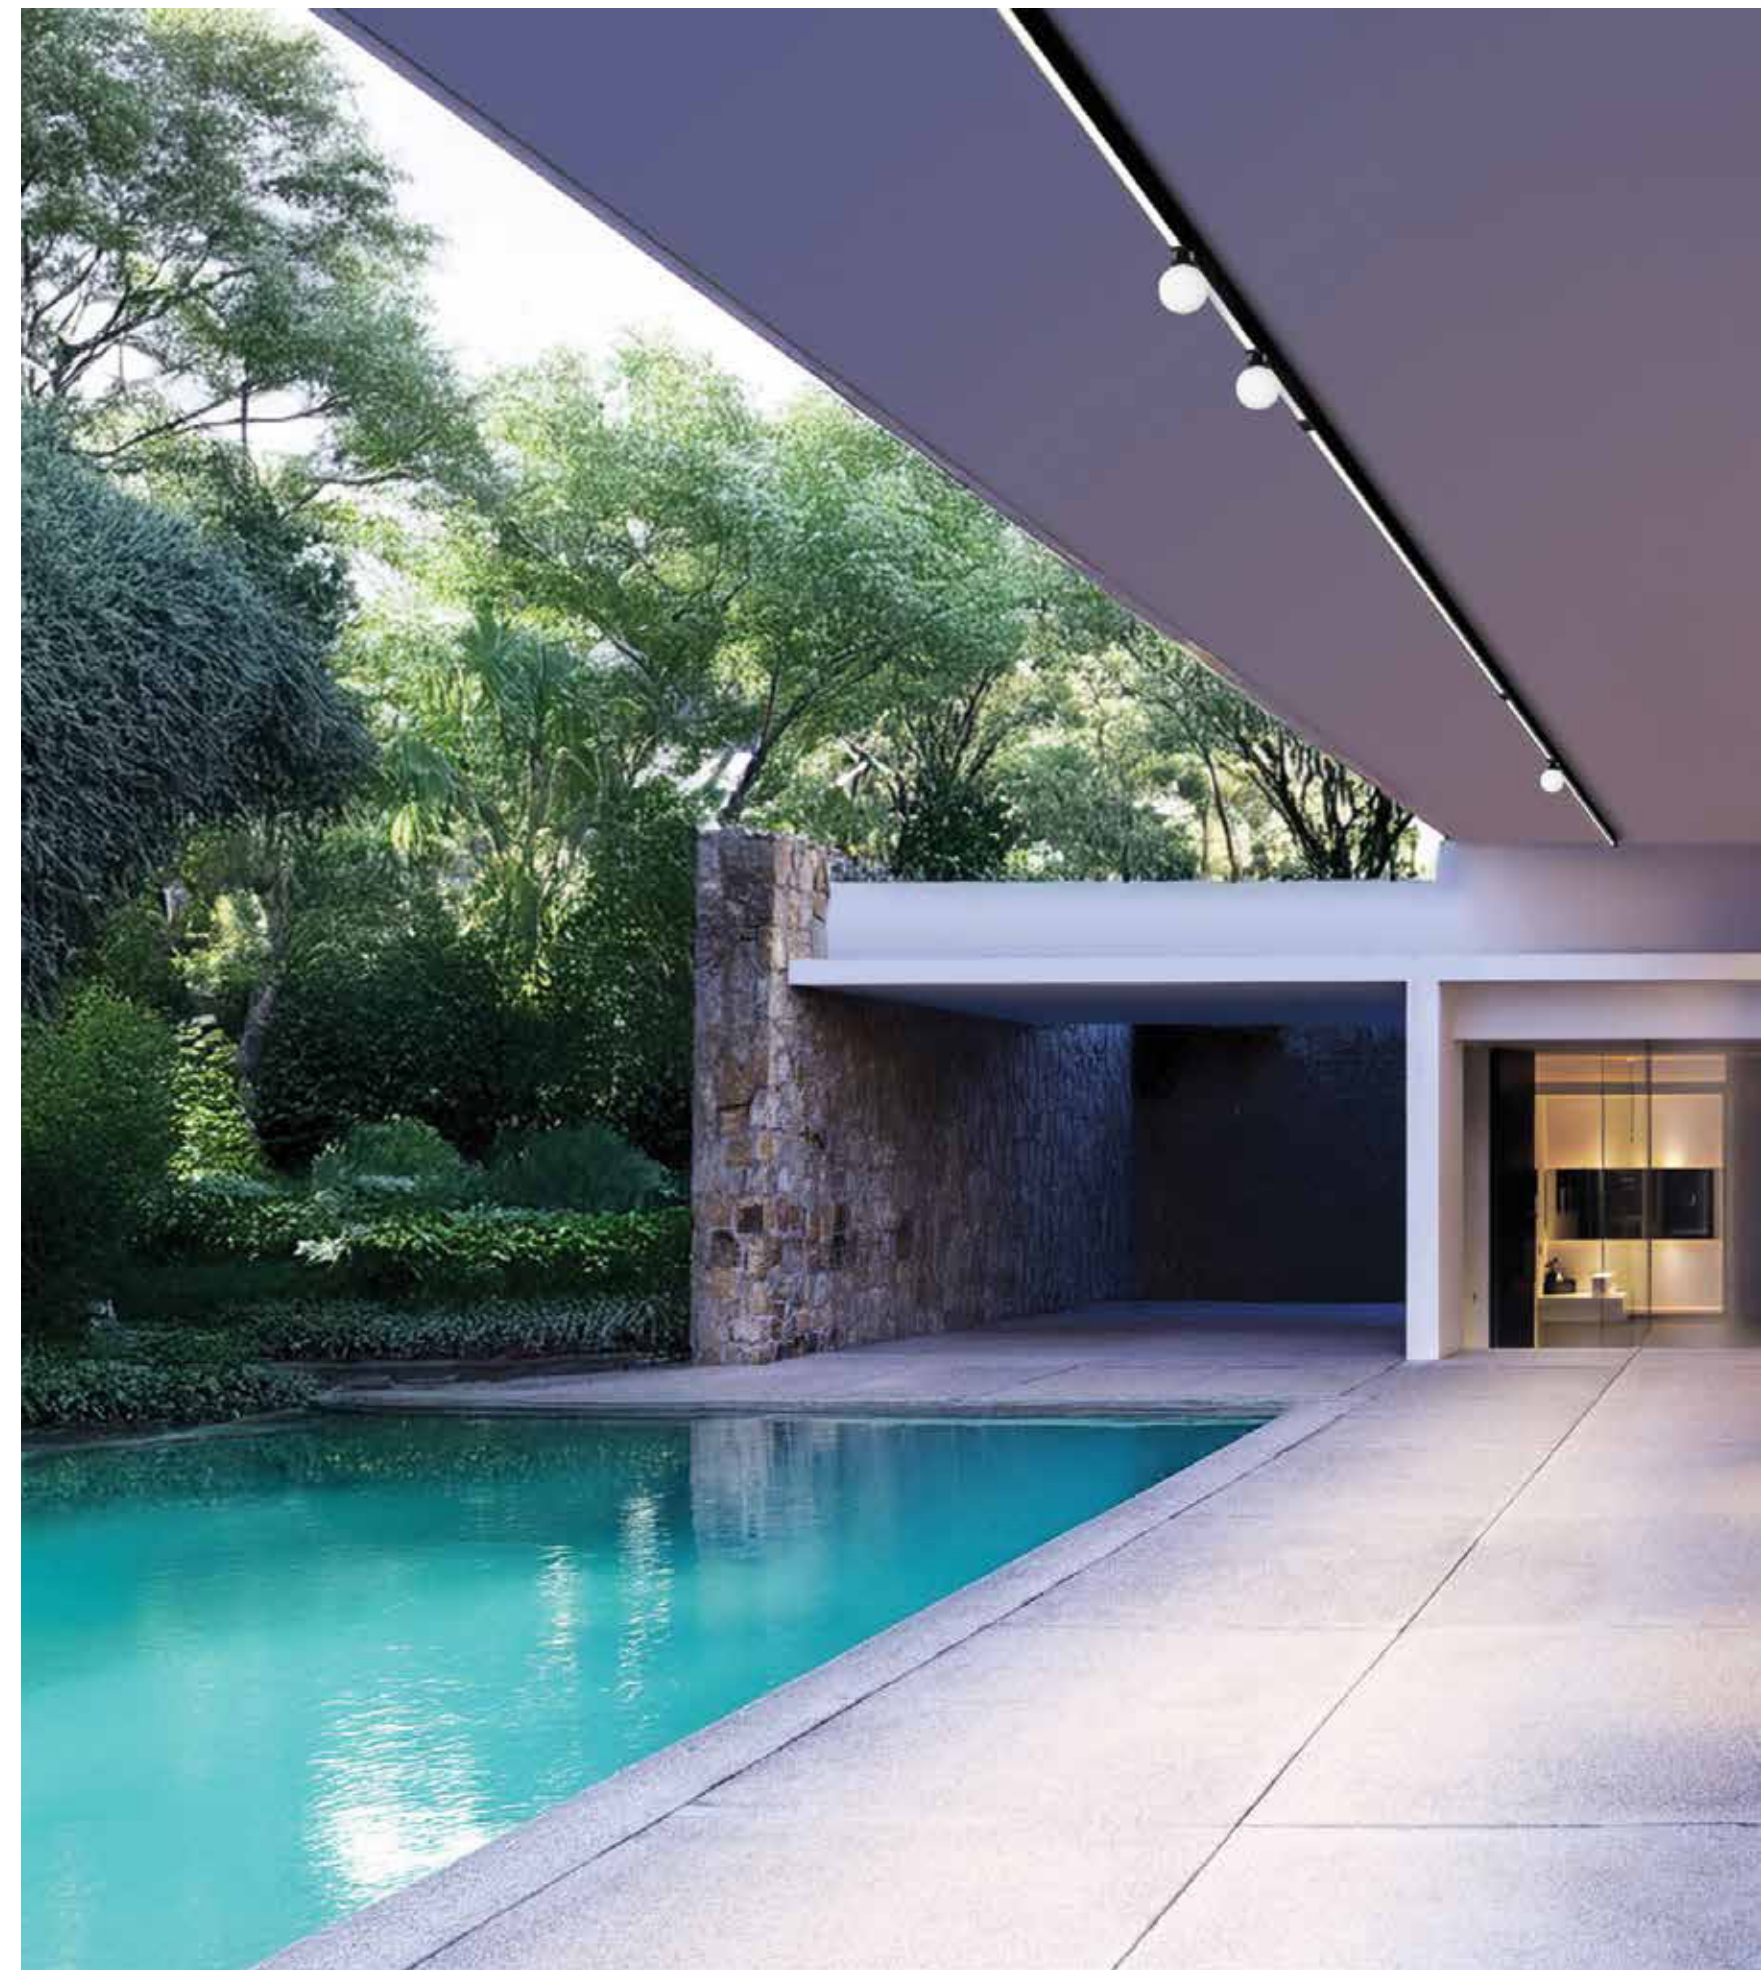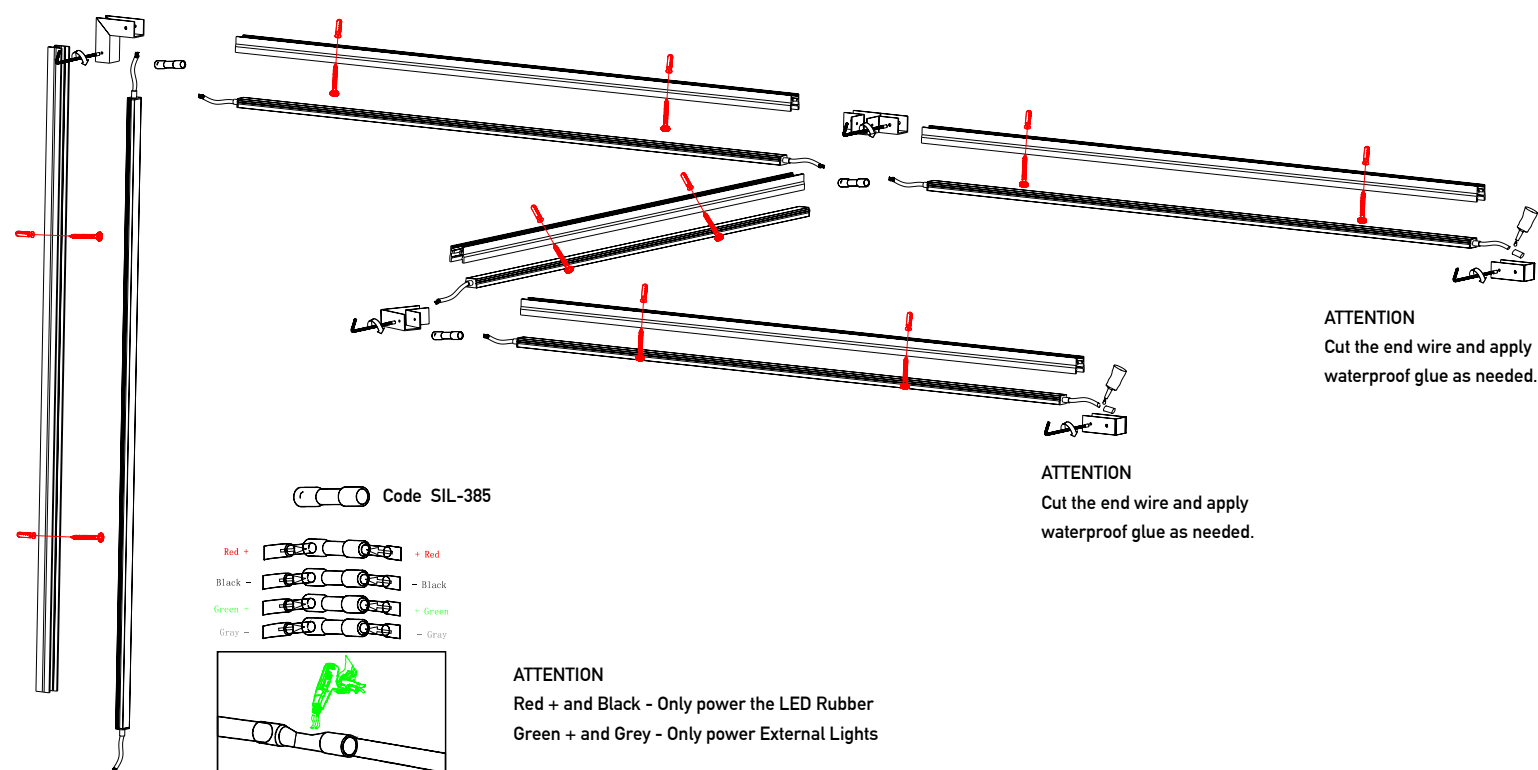

Power 30W
 Input 220-240V, 50/60Hz
 Output 24V
 Dimensions W: 4.1cm H: 2.7cm L: 14.5cm
 Non Dimmable ☒ On-Off
 ELEMENT 30/220-240/24 G2
 Material Plastic
 Special Feature IP 20
 Color White / **Code 4052899605503**



Power 60W
 Input 220-240V, 50/60Hz
 Output 24V
 Dimensions W: 4.1cm H: 3.1cm L: 20.1cm
 Non Dimmable ☒ On-Off
 ELEMENT 60/220-240/24 G2
 Material Plastic
 Special Feature IP 20
 Color White / **Code 4052899605527**



Power 180W
 Input 220-240V, 50/60Hz
 Output 24V
 Dimensions W: 4cm H: 3.1cm L: 30cm
 Non Dimmable ☒ On-Off
 ELEMENT 180/220-240/24 G2
 Material Plastic
 Special Feature IP 20
 Color White / **Code 4052899605565**



Power 30W
 Input 220-240V, 50/60Hz
 Output 24V
 Dimensions W: 6.7cm H: 3cm L: 10.3cm
 DALI Dimming ○ Push Button - DALI2
 1 CHANNEL
 Material Plastic
 Special Feature IP 20
 Color White / **Code 4062172329767**



Power 50W
 Input 220-240V, 50/60Hz
 Output 24V
 Dimensions W: 3.2cm H: 2.2cm L: 34.6cm
 DALI Dimming ○ Push Button - DALI2
 1 CHANNEL
 Material Plastic
 Special Feature IP 20
 Color White / **Code 4062172274340**



Power 80W
 Input 220-240V, 50/60Hz
 Output 24V
 Dimensions W: 3.2cm H: 2.2cm L: 34.6cm
 DALI Dimming ○ Push Button - DALI2
 1 CHANNEL
 Material Plastic
 Special Feature IP 20
 Color White / **Code 4062172274364**



Power 200W
 Input 220-240V, 50/60Hz
 Output 24V
 Dimensions W: 6.3cm H: 3.6cm L: 20cm
 Non Dimmable ☒ On-Off
 Material Metal
 Special Feature IP 67
 Color White / **Code XLG-200**



Power 150W
 Input 220-240V, 50/60Hz
 Output 24V
 Dimensions W: 5cm H: 3.1cm L: 26.2cm
 DALI Dimming ○ Push Button - DALI2
 1 CHANNEL
 Material Metal
 Special Feature IP 67
 Color White / **Code AC-MS-150**



Power 80W
 Input 220-240V, 50/60Hz
 Output 24V
 Dimensions W: 3.2cm H: 2.2cm L: 34.6cm
 DALI Dimming ○ Push Button - DALI2
 4 CHANNEL
 Material Plastic
 Special Feature IP 20
 Color White / **Code 4062172274302**



Input 220-240V, 50/60Hz
 Dimensions W: 5cm H: 8cm L: 8cm
 DALI Dimming ○
 DALI MCU Tunable White Switch
 Material Plastic
 Special Feature IP 20
 Color White / **Code 4052899465916**



Power 100W
 Input 220-240V, 50/60Hz
 Output 24V
 Dimensions W: 5cm H: 3cm L: 23cm
 Dimmable Triac , 1-10 ○
 Material Metal
 Special Feature IP 20
 Color Metal / **Code Z89100VND**



Power 200W
 Input 220-240V, 50/60Hz
 Output 24V
 Dimensions W: 5cm H: 3cm L: 28.7cm
 Dimmable Triac , 1-10 ○
 Material Metal
 Special Feature IP 20
 Color Metal / **Code Z89200VND**



Power 288W @ 24V
 Input 220-240V, 50/60Hz
 Dimensions W: 2.9cm H: 2.2cm L: 18.6cm
 Bluetooth Dimming ○
 OT Wi DIM 5 CHANNEL CA
 RGB, RGBW and RGBTW
 Material Plastic
 Special Feature IP 20
 Color White / **Code 6937186115232**



CV dimmers with Bluetooth

Power 288W @ 24V
 Input 220-240V, 50/60Hz
 Dimensions W: 4.2cm H: 2cm L: 17.2cm
 DMX Dimming ○
 OT DMX DIM 5 CHANNEL
 RGB, RGBW and RGBTW
 Material Plastic
 Special Feature IP 20
 Color White / **Code 6977078993838**



E099	16
E109	179
E121	240
E122	240
E123	240
E124	240
E127	218
E128	218
E132	136
E133	136
E135	178
E146	237
E149	218
E150	242
E151	242
E152	284
E153	285
E156	178
E159	179
E168	248
E177-A	286
E177-B	286
E178	359
E179	358
E180	358
E181	328
E182	328
E183	328
E184	328
E185	246
E186	246
E187	330
E189	371
E190	56
E191	56
E192	56
E193	34
E194	34
E195	222
E197	224
E199	225
E201	200
E202	200
E203	122
E204	122
E208	152
E216	248
E217	298
E219	342
E220	342
E227	234
E229	326
E230	327
E235	156
E235-12D	156
E236	156
E237	142
E238	172

E238-W	172
E239	172
E239-W	172
E240	172
E240-W	172
E241-G	321
E241-W	321
E242-G	320
E242-W	320
E243	220
E246-G	325
E246-W	325
E247-G	324
E247-W	324
E249	142
E253	48
E254	48
E261	236
E262	236
E265	238
E266	238
E267	210
E268	208
E269	344
E270	344
E271	208
E272	229
E273	227
E274	226
E275	205
E276	126
E277	126
E278	228
E279	292
E280	294
E281	289
E282	289
E282-SP	289
E283	290
E284	283
E285	280
E286	280
E287	194
E289	29
E290	29
E291	29
E294	318
E296	200
E297	108
E298	144
E300	314
E301	314
E302	125
E304	251
E305	251
E306	245
E307	245
E308	342

E309	342
E310	298
E311	296
E312	296
E313	26
E314	26
E315	223
E316	180
E317	180
E318	232
E319	313
E320	310
E321	312
E322	311
E323	316
E324	316
E325	138
E326	346
E327	346
E328	266
E329	266
E330	266
E331	266
E332	334
E333	334
E334	117
E335	116
E336	117
E337	154
E338	74
E339	74
E340	340
E341	205
E342	206
E343	196
E344	129
E345	129
E346	308
E347	308
E348	76
E349	276
E350	276
E351	147
E352	146
E353	112
E354	130
E355	151
E356	148
E357	132
E358	134
E359	371
E360	368
E361	368
E362	366
E363	366
E364	365
E365	360
E366	363

E367	151
E368	112
E369	24
E370	24
E371	24
E374	384
E375	384
E376	384
E377	384
E378	383
E379	383
E380	383
E381	383
E382	380
E383	51
E384	51
E385	388
E386	390
E387	390
E388	390
E389	389
E390	388
E391	389
E392	388
E393	389
E397	394
E398	30
E399	30
E400	30
E401	32
E402	32
E403	278
E404	278
E405	66
E406	65
E407	84
E408	87
E409	88
E410	54
E411	54
E412	189
E413	182
E414	185
E415	186
E416	214
E417	214
E418	104
E419	162
E420	162
E421	164
E422	164
E423	92
E424	96
E425	95
E426	98
E427	160
E428	166
E429	190

E430	190
E431	193
E432	193
E433	170
E434	199
E435	231
E436	231
E437	202
E438	202
E439	176
E440	176
E441	302
E442	302
E443	119
E444	120
E445	68
E446	110
E447	110
E448	72
E449	269
E450	304
E451	304
E452	304
E453	307
E454	307
E455	307
E456	262
E457	256
E458	256
E459	257
E460	257
E461	364
E462	364
E463	82
E464	212
E465	264
E466	91
E467	102
E468	274
E469	274
E470	274
E471	274
E472	272
E473	272
E474	41
E475	44
E476	46
E477	41
E478	40
E479	58
E480	53
E482	22
E483	22
E484	22
E485	16
E486	16
E487	16
E488	20

E489	20
E490	20
E491	169
E492	169
E493	169
E494	261
E495	376
E496	374
E497	375
E498	378
E499	378
E500	217
E501	392
E502	350
E503	350
E504	352
E505	352
E506	353
E507	353
E508	356
E509	356
E510	355
E511	355
E518	106
E522	81
E523	80
S112	340
S113	340
S131	338
S131-4K	338
S132	338
S132-4K	338
S133	339
S134	339
AC-MS-150	397
SIL-385	394
CNCTR 1	384
CNCTR 2	383
CNCTR 3	380
CNCTR 4	383
CNCTR 6	376
CNCTR 7	378
LPH-18-24	267
LPV-35-24	84
V350-1050	278
XLG-200	397
XSV160W48	394
XSV240W48	394
Z0800-BA	267
Z89100VND	397
Z89200VND	397
25280	20
4052899465916	397
4052899605503	396
4052899605527	396
4052899605565	396
4062172166010	380
4062172274302	397

4062172274340	397
4062172274364	396
4062172329767	396
6937186115232	397
6977078993838	397

ZAMPELIS S.A.

Greece , Attica , Keratea , Kivouri

Postal: 19001 , P.O. box: 4791

Tel.: (+30) 22990 63518-19 | Fax: (+30) 22990 63521

info@zambelislights.gr | zambelislights.gr

