

# KRATEX | PC

With a wide range of options for ATEX projects


Certificate No:

INERIS 20ATEX0006X-01

IECEx INE 20.0005X-01

**Ex II 2G Ex db IIC T6 Gb**

**Ex II 2D Ex tb IIIC T85°C Db**



## Benefits

- Suitable for environments up to 50°C, even outdoors.
- Compliant with gas groups IIA, IIB, IIC, due to its reduced MESH, making it perfect for almost all ATEX environments.
- DALI dimmable to optimize the use of light and save energy.
- Intelligent wireless control available.

## Characteristics



### Mechanical characteristics

Profile	UV resistant polycarbonate 5 mm thickness
End caps	Aluminium alloy, yellow RAL 1003
Gasket	Nitrile Butadiene Rubber (NBR)
Gear tray	White laquered steel plate
Cable entry	2 entries of 3/4 NPT for cable gland (not included)
Fixing clips	See Accessories

### Functional characteristics

Lifetime	L80B50 50,000 hours at 25°C
Guarantee	5 years
Fire protection	Flammability (UL94): V2 Glow wire test (EN 60695-2-11): 850°

### Electrical characteristics


Connection	3/5 pole push wire terminal block
THD	< 10% full load

Compliance



### Photometrical characteristics

SDCM	< 3
------	-----



## KRATEx | PC

### Description

FAMILY	LENGHT (mm)	LUMINOUS FLUX (lm)	CRI	LIGHT COLOUR (K)	DRIVER	PROFILE	THROUGH WIRING	EMERGENCY KIT	END CAPS COLOUR
> KRATEx HE > KRATEx NS HE: non-permanent emergency versions	> 600 > 1200	> 20: ~ 2500 > 40: ~ 4750 > 100: ~ 11000	> 8: >80	> 40: 4000	> ET: non-dimmable > ETDD: DALI > ETDD CS: Casambi dimmable	> PC: polycarbonate	> 3x2.5mm <sup>2</sup>	> NiCd > EB1: 1 hours > EB3: 3 hours > EB1 : 1 hour + autotest > EB3. : 3 hours + autotest	> yellow RAL 1003
Special options under request									
Ask our Sales Team for more details				> 65: 6500K				> NiMh > LiFePO4	> 7035: grey RAL 7035

### Operational data

Description	Order number	Luminous flux (lm)	Power (W)	Efficiency (lm/W)	Emergency luminous flux (lm)	Colour temperature (K)	CRI	Temperature range
KRATEx HE 600 25-840 ET PC	10169101	2500	20	125	-	4000	> 80	-20°C +50°C
KRATEx HE 600 25-840 ET PC 3x2.5	10203309	2500	20	125	-	4000	> 80	-20°C +50°C
KRATEx HE 600 25-840 ET PC EB1. <sup>1</sup>	10203326	2500	24	100	750	4000	> 80	-0°C +50°C
KRATEx HE 600 25-840 ET PC EB3. <sup>1</sup>	10203327	2500	30	83	750	4000	> 80	-0°C +50°C
KRATEx HE 600 25-840 ETDD PC	10203310	2500	20	125	-	4000	> 80	-20°C +50°C
KRATEx HE 600 25-840 ETDD PC CS	10203311	2500	20	125	-	4000	> 80	-20°C +50°C
KRATEx HE 600 25-840 ETDD PC EB1 <sup>1</sup>	10203314	2500	24	104	750	4000	> 80	0°C +50°C
KRATEx HE 600 25-840 ETDD PC EB3 <sup>1</sup>	10203315	2500	30	83	750	4000	> 80	0°C +50°C
KRATEx HE 1200 48-840 ET PC	10169107	4750	40	120	-	4000	> 80	-20°C +50°C
KRATEx HE 1200 48-840 ET PC 3x2.5	10203316	4750	40	120	-	4000	> 80	-20°C +50°C
KRATEx HE 1200 48-840 ET PC EB1. <sup>1</sup>	10169109	4750	40	118	750	4000	> 80	0°C +50°C
KRATEx HE 1200 48-840 ET PC EB3. <sup>1</sup>	10169111	4750	45	110	750	4000	> 80	0°C +50°C
KRATEx HE 1200 48-840 ETDD PC	10203317	4750	40	120	-	4000	> 80	-20°C +50°C
KRATEx HE 1200 48-840 ETDD PC CS	10203318	4750	40	120	-	4000	> 80	-20°C +50°C
KRATEx HE 1200 48-840 ETDD PC EB1 <sup>1</sup>	10203333	4750	40	120	750	4000	> 80	0°C +50°C
KRATEx HE 1200 48-840 ETDD PC EB3 <sup>1</sup>	10203334	4750	45	110	750	4000	> 80	0°C +50°C
KRATEx HE 1200 110-840 ET PC	10203335	11000	80	140	-	4000	> 80	-20°C +50°C
KRATEx HE 1200 110-840 ETDD PC	10203336	11000	80	140	-	4000	> 80	-20°C +50°C
KRATEx NS HE 0.6 8-840 ET PC EB1.	10169103	-	3,5	-	750	4000	> 80	0°C +50°C
KRATEx NS HE 0.6 8-840 ET PC EB3.	10169105	-	5	-	750	4000	> 80	0°C +50°C

<sup>1</sup> In emergency versions maximum power consumption increases in 4W during battery charging, which is approximately 5% of the time that luminaire is on. The rest of the time power consumption is as indicated.

\* Emergency luminaires have a special voltage and frequency range because they do not admit Vdc, therefore it is: 220-240V 50-60Hz.


\* The luminaires with Casambi CS module, do not admit Vdc or 60Hz, therefore it is: 220-240V 50Hz.

### Dimensions and logistics

Description	X	Xm	Y	Z					
	mm	mm	mm	mm	L x W x H mm	Pcs./ Box	Box <sup>2</sup>	Groupage Pcs./Euro pallet	Double pallet Pcs./Euro pallet
KRATEx HE 600...	750	640	157	197	780 x 240 x 180	1	5.9	48	32 + 32
KRATEx HE 1200...	1360	1250	157	197	1390 x 240 x 180	1	11.2	24	16 + 16

<sup>2</sup> Weight in EB versions: +0.6KG and in 3x2.5 versions: +0.1KG

Please check with our Back Office to confirm logistic data

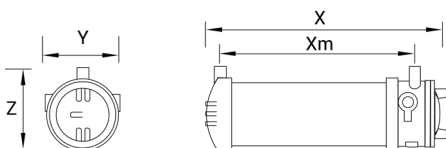

### Accesories

10078101	Eye bolts, 2 units
10078102	Fixing omegas, 2 units
10078104	Brass double-sealed EX cable gland seals for armoured cable 3/4 NPT, 1 unit

